Compress

MARCH 1952

PERMANENT FILE

LITERATURE

Return this copy to

Advertising Division
Ingersoll-Rand
Phillipsburg, New Jersey

File _____

X-1850 IR 2M 10-54

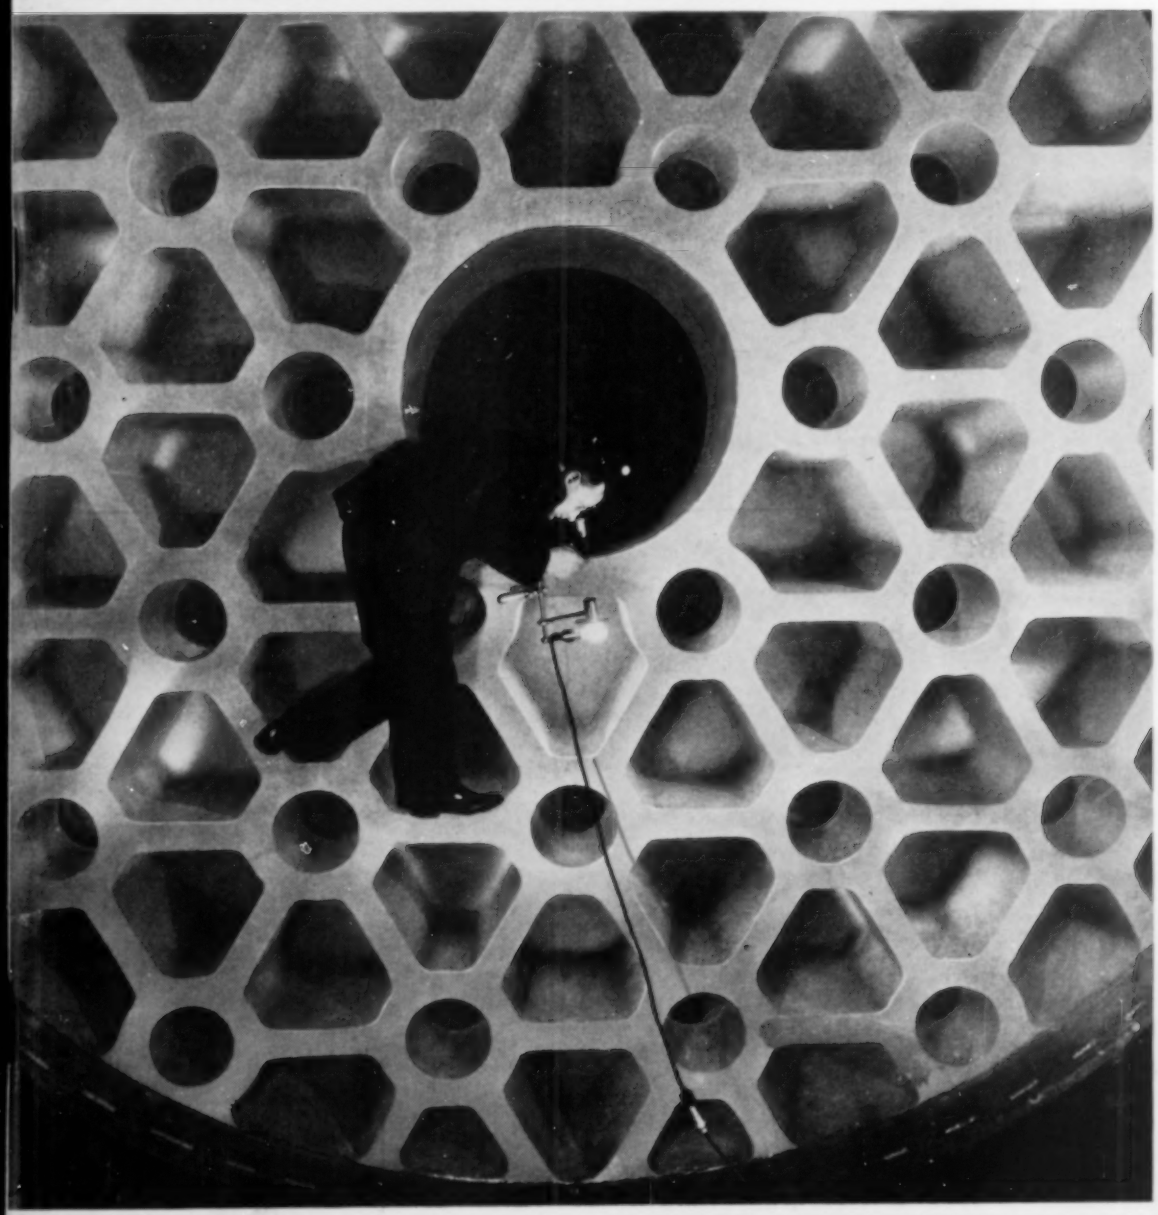

CHECKING GLASS WEB FOR FLAWS

Technician emulates spider to inspect reinforcement of huge telescope mirror

(SEE INDEX PAGE AND PAGE 67)

VOLUME 57 • NUMBER 3 NEW YORK • LONDON

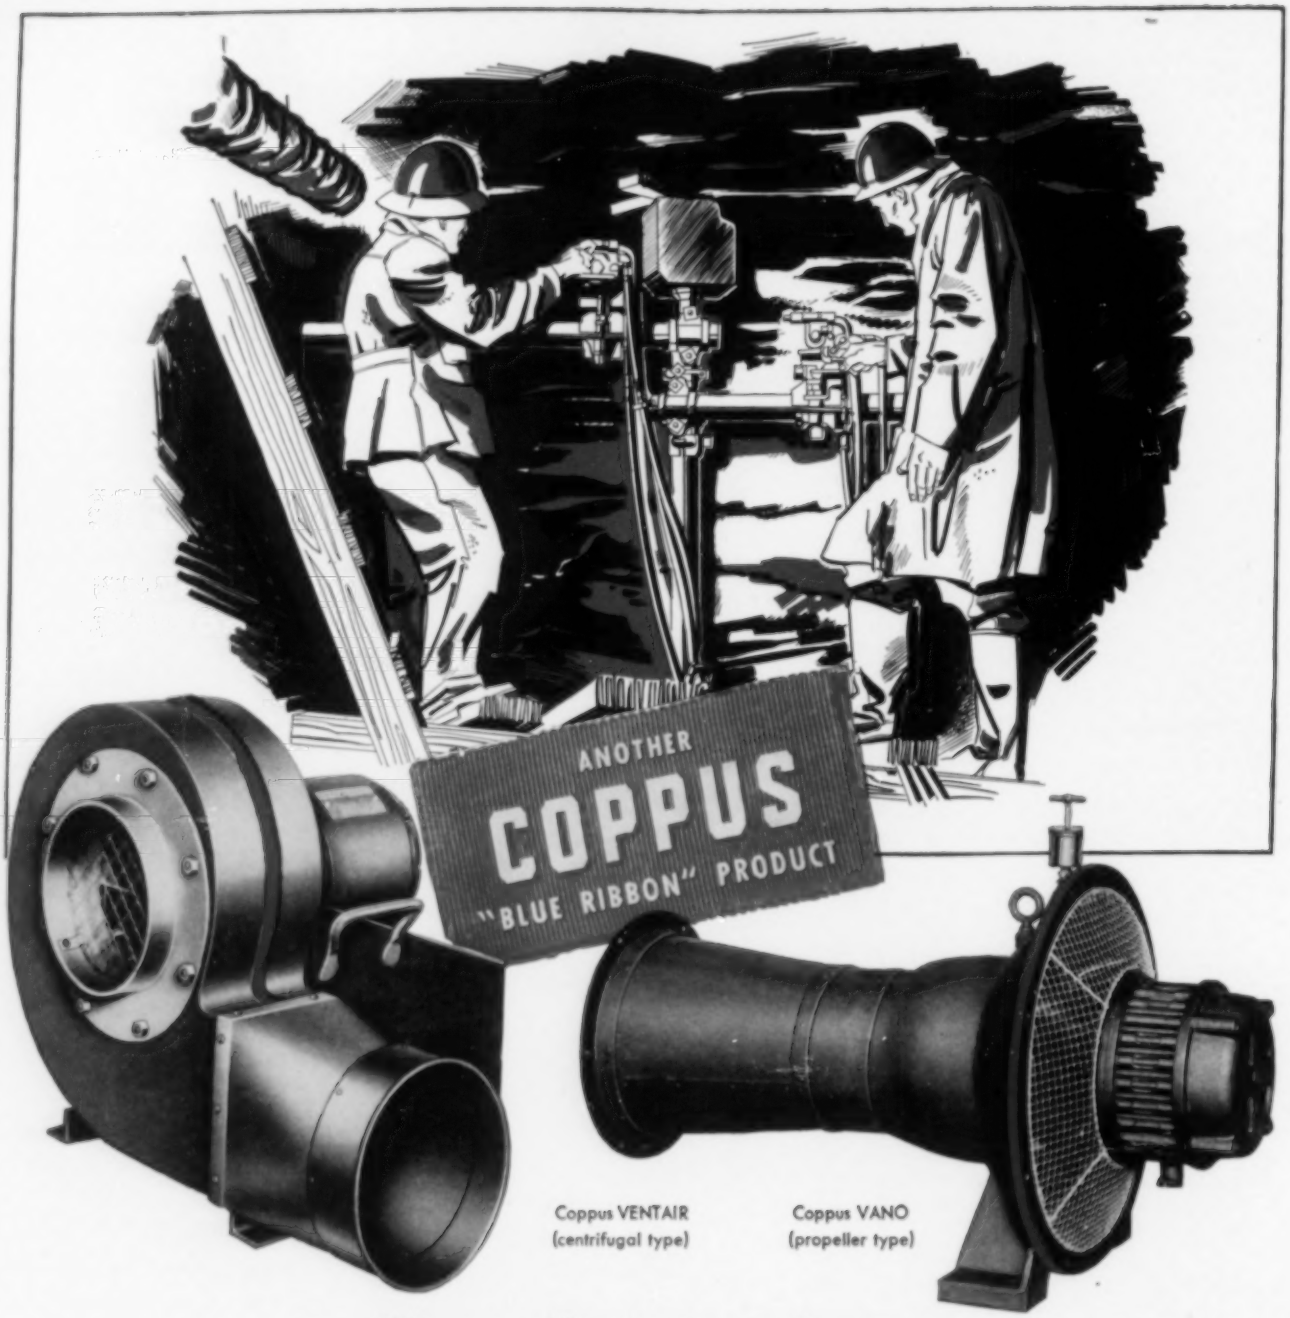

Coppus VENTAIR (centrifugal type)

Coppus VANO (propeller type)

Choose between them and get 30% to 100% more air

Coppus Blowers are designed for two different types of mine ventilation requirements: the centrifugal Coppus VENTAIR is for long pipe lines; the propeller-type Coppus VANO for shorter lines . . . the correct selection will give you from ⅓ more to twice as much air — for a given power consumption — than an ordinary all-purpose fan.

Available for either compressed air or electric motor drive, both can be used as blowers or exhausters and are obtainable in capacities up to 90,000 CFM.

Only Coppus makes both these types, one of which will give you better, more economical mine ventilation . . . know them by the "Blue Ribbon" that symbolizes the engineering and production skill behind every Coppus product.

Representatives listed in MINING CATALOGS. Other Coppus "Blue Ribbon" products: steam turbines, gas burners, heat killers, air filters, blowers and exhausters for special purposes. See also THOMAS' REGISTER . . . Coppus Engineering Corporation, Worcester 2, Mass.

COPPUS ENGINEERING CORPORATION
203 Park Avenue, Worcester 2, Mass.

Please send ..... Bulletin 130

Name .....

Company .....

Address .....

STAYNEW INTAKE FILTERS

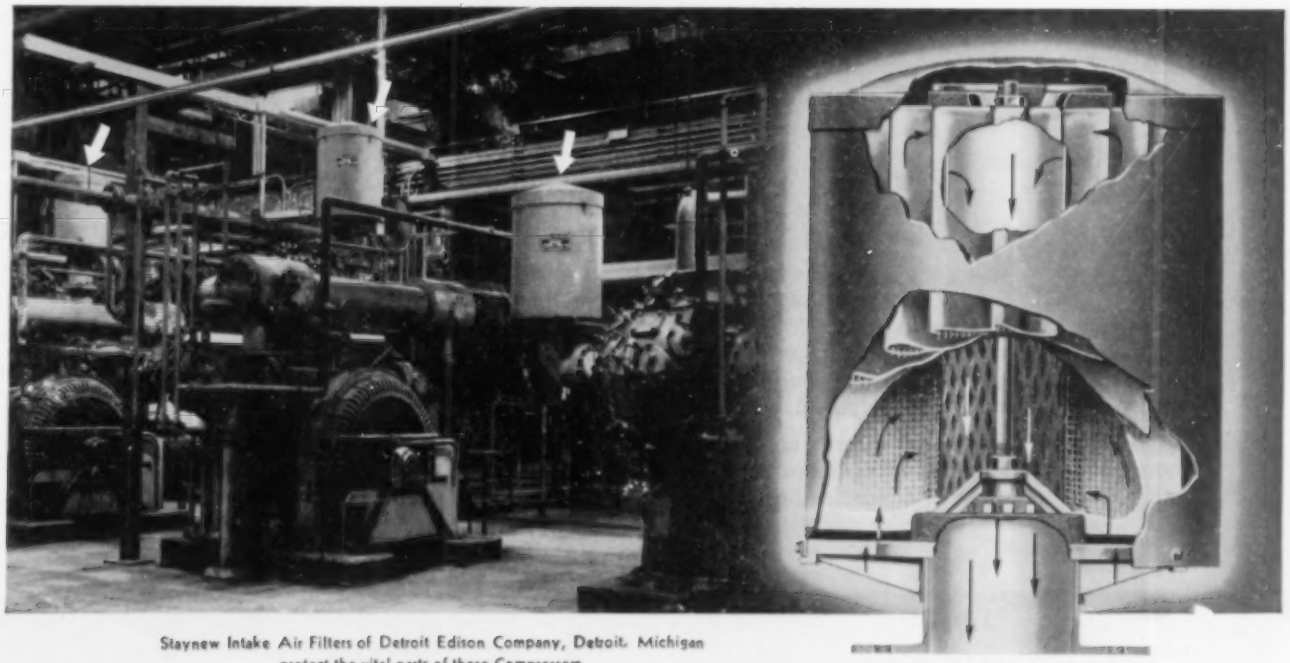

Staynew Intake Air Filters of Detroit Edison Company, Detroit, Michigan protect the vital parts of these Compressors.

MODEL D Intake Filter

KEEP COMPRESSORS YOUNG!

Your air compressing equipment demands the protection Staynew Intake Filters are designed to give. With Staynew, compressors, and internal combustion engines, blowers, motors and generators remain at peak efficiency years longer.

Staynew's "Positive Protection" keeps shutdowns and repairs at an absolute minimum. And Staynew itself requires less attention. The *dry-type* filtering medium has the ability to remove air-borne dust particles without the necessity of viscous filter aids.

Staynew Intake Filters efficiently protect vital engine parts without carefully held maintenance schedules. And where noise is a problem, Model DS Silencer Filters are available. To keep equipment young, always specify Staynew.

Write today for Staynew Catalog S.I.F.

Representatives in Principal Cities

- Positive Protection
- Efficiency Actually Increases with Use
- Efficient Over a Wide Range of Loads
- Not Affected by Temperature Changes
- No Oil Carry-Over
- No Oil Blow-Out Over Free Air-Unloading Compressors

DOLLINGER PROTECTOMOTOR STAYNEW FILTERS

DOLLINGER CORPORATION

7 Centre Pk., Rochester 3, N. Y.

ALL TYPES OF FILTERS FOR EVERY INDUSTRIAL NEED

make your own comparison...

a Fluor-GR Fin-Fan

against any other air-cooled heat exchanger



When considering air-cooled heat exchanger equipment, compare the advantages of a Fluor-GR Fin-Fan. Make comparisons of structural simplicity and flexibility. Compare the exclusive features of the K-Fin section, the rugged yet precision design of all mechanical equipment. Check *proven performance* in such varied services as gas transmission systems, petroleum refineries, light hydrocarbon processing plants, chemical processing plants, and power and industrial plants.

The Fluor-GR Fin-Fan was *pioneered* by The Fluor Corporation and the Griscom-Russell Company. It was the *first* of this type heat exchanger to be developed for industry. Fluor, with its wide experience in the theory, design, and fabrication of air-moving systems, and Griscom-Russell, with its long experience in heat transfer, *continue* to lead in the development and refinement of air-cooled heat exchanger equipment.

Before you buy or specify, compare the Fluor-GR Fin-Fan. A Fin-Fan provides more exclusive design features—features that add up to *efficient, dependable* performance—than any other make of air-cooled heat exchanger. Write for Fluor Bulletin No. FF-8501.

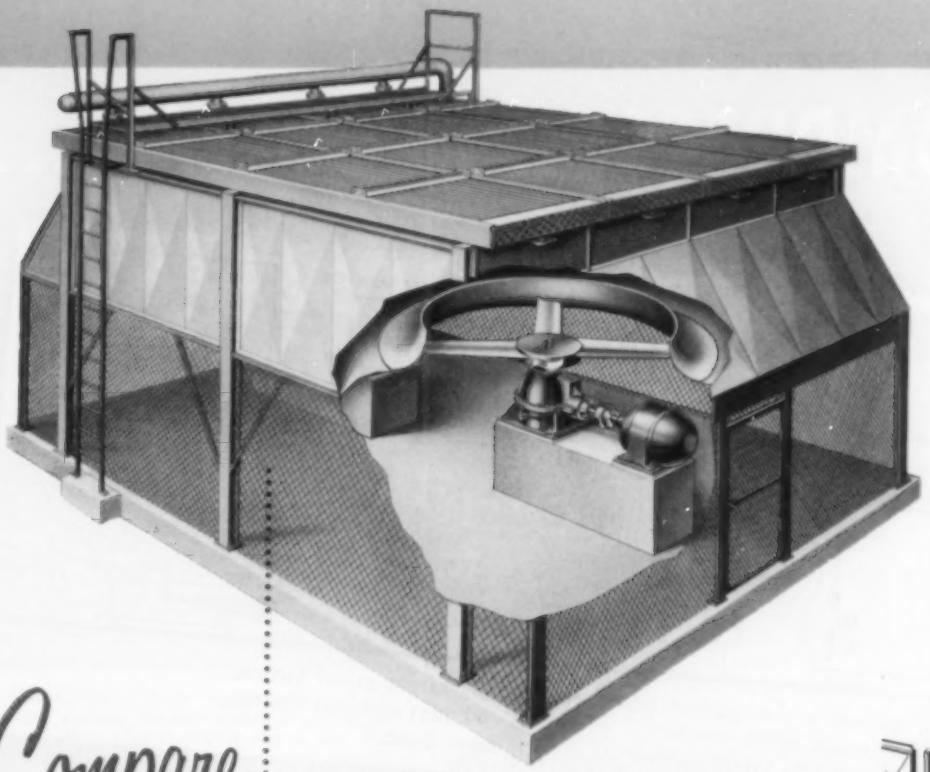

Compare
Compare
Compare

structural design – Structurally, the Fin-Fan is the ultimate in simplicity and flexibility. Its "truss-type" design provides a rugged, vibrationless unit, free of extraneous parts. Uniform prefabrication of parts, with bolt holes and orientation *incorporated* in basic design, permits easy extension without shut-down of existing units!



K-Fin features – G-R K-Fins are tension-wound for *moderate* temperatures, rolled into grooves for *elevated* temperatures. Threaded header plugs provide quick, easy access to tube ends for cleaning or replacement. Plugs are shoulder-tight to form a leakproof metal-to-metal joint at all pressures, independent of thread tightness.



mechanical equipment – Fluor mechanical equipment is ruggedly designed to meet specific heat transfer requirements. 4 basic gear units cover 4 different and distinct horsepower ranges. This, coupled with a choice of fan assemblies ranging from 8′ to 20′ in diameter, with 4 or 6 blades per fan unit, enables the *proper* combination of gears and fans to effect optimum efficiency.

Compare
proven performance . . .

More Fluor-GR Fin-Fan Air-Cooled Heat Exchangers are in service throughout the continental United States and in countries abroad than any other make. More Fluor-GR Fin-Fan installations are the result of repeat orders than any other type. Check with your nearest Fluor Representative for the Fin-Fan's outstanding record of proven performance – in services and duties similar to your own!

FLUOR

Engineers - Constructors - Manufacturers

THE FLUOR CORPORATION, LTD., 2500 S. ATLANTIC BLVD., LOS ANGELES 22, CALIF.
New York, Chicago, Pittsburgh, Boston, Tulsa, Houston, San Francisco, Birmingham and Calgary

Represented in the Sterling areas by:
Head Wrightson Processes Ltd., Teesdale House, Baltic Street, London, E.C.1., England

SINCE 1909

to help you solve your

AIR COMPRESSOR PROBLEMS...

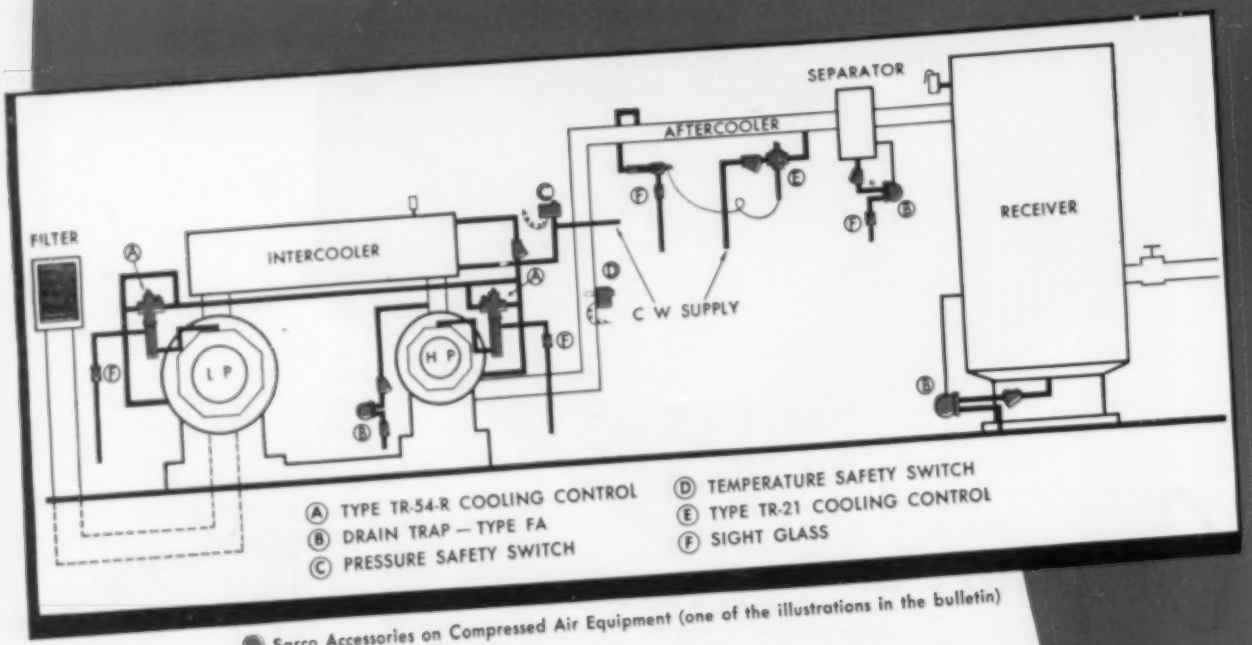

Sarco Accessories on Compressed Air Equipment (one of the illustrations in the bulletin)

write for

TECHNICAL BULLETIN 5-CO...

Sarco type TR-21 Cooling Control on Air Compressor.





Sarco type FA Float Trap draining separators.

THIS BULLETIN is designed to pass on to you the experience of compressed air users and of SARCO engineers, in improving equipment operation without excessive outlay.

You will find also simple hook-ups of SARCO cooling controls, and of drip traps which eliminate condensation from intercoolers, aftercoolers, separators and receivers.

SARCO SPECIALTIES FOR COMPRESSED AIR include also: ELECTRIC SAFETY CONTROLS to shut down the compressor or sound an alarm when the temperature or pressure gets too high or too low in the cooling, lubricating or air systems; and a complete range of pipe line strainers.

Practical advice on how to improve operation of your air compressor—free in Bulletin TB-5-CO.

359

SARCO COMPANY, INC.

EMPIRE STATE BUILDING, NEW YORK 1, N. Y.

SARCO CANADA LTD., TORONTO 8, ONTARIO

REPRESENTED IN PRINCIPAL CITIES

GM DIESEL powers world's most compact 600 cfm Compressor

CONSTRUCTION—"Starts like a charm, even on the coldest morning. No time wasted in getting up to pressure. Runs a heavy pile driver with ease. We can set it out of the way with a crane and move it back to the roadway for towing in no time."



QUARRYING AND MINING—"We couldn't imagine 600 feet coming from such a slick little compressor until we saw the increased drill footage, and the ease with which it took over two FM-2 wagon drills. Good fuel economy, too."

HIGHWAY BUILDING—"Plenty of reserve—full capacity at 6,730 feet altitude. We're operating eight 55-lb. blower drills putting in 20-ft. holes on cliffsides. So easy to maneuver and work with that it's a natural for tough jobs like this."

WINNING acclaim as the world's smallest, lightest, big-capacity portable compressor, the new Ingersoll-Rand Gyro-Flow 600 is powered by a 6-cylinder General Motors Series 71 Diesel engine.

This compact, high-powered portable delivers a full 600 cubic feet of air per minute at a steady 100-lb. pressure, yet it weighs only 9,500 pounds. It is 20 to 40% lighter—and as much as 20% smaller—than other portables of comparable capacity.

Being 2-cycle, GM Diesel engines pack more power in less space. They start quickly on their own fuel, run smoothly and enable equipment to maintain rated performance at high altitudes. They're designed for ease of maintenance—no high-pressure fuel tubing—unit injectors that can be changed in a matter of minutes. And, when needed, low-cost "Factory-Engineered" parts are readily obtainable.

These modern 2-cycle Diesels are bringing new economy and efficiency to more than 500 different kinds of power equipment built by 120 manufacturers. Ask your GM Diesel distributor or write us for full details.

ANSWER THE CALL CIVIL DEFENSE

DETROIT DIESEL ENGINE DIVISION

SINGLE ENGINES...*Up to 275 H.P.* **DETROIT 28, MICHIGAN** MULTIPLE UNITS...*Up to 800 H.P.*

GENERAL MOTORS

GM GENERAL MOTORS DIESEL POWER

DIESEL BRAWN WITHOUT THE BULK

A Statement by Anaconda on the Copper Situation

MANY users of copper have vital decisions to make . . . usually in connection with the present defense-induced shortages of copper and aluminum. This statement is an effort to remove the smoke screen surrounding the copper picture . . . to wipe away the confusion caused by too much talk supported by too few facts.

Substitution poses problems – Industry has been urged to substitute aluminum and other materials for copper. In some instances this may be logical and practicable. In many others it is difficult, if not impossible. But – before making *any* long-term decisions that may cost a great deal of money in engineering, new plant facilities or rescheduling of production operations – one should know the facts about the future of copper.

New Anaconda projects – The first major increase in copper production will come from Anaconda when the Greater Butte Project and the new Sulphide Plant at Chuquicamata, Chile, begin operations this spring. By 1953, these two projects should raise present levels of copper production by about 95,000 tons yearly.

Toward the close of 1953, Anaconda's new Yerington project in Nevada is expected to start producing at an annual rate of 30,000 tons. By then, Anaconda will be adding to the present yearly copper supply at the rate of about 125,000 tons.

Other new projects – During 1954-55 still other new projects in the U. S. and friendly foreign countries will further augment the increasing copper supply. All told, it is estimated that by 1955, not less than 450,000 tons of copper could be produced annually – over and above present production levels.

Accordingly, in 1955-56, domestic production plus imports could bring the U. S. copper supply to 1,800,000 tons yearly. This would represent an increase of about 20% over present levels. Based on historical comparisons, and barring a large-scale shooting war, this amount of copper could support a Federal Reserve Board Index of Industrial Production of 270, an increase of 24% over the present, and 45% above the first half of 1950.

• • •

These are the 'things to come' in copper. On the basis of the facts there is no necessity for considering long-range substitution of other materials for the red metal.

52320A

ANACONDA
COPPER MINING COMPANY

The American Brass Company
Anaconda Wire & Cable Company
International Smelting and Refining Company
Andes Copper Mining Company
Chile Copper Company
Greene Cananea Copper Company

PRODUCERS OF: Copper, Zinc, Lead, Silver, Gold, Cadmium, Vanadium, Superphosphate, Manganese Ore, Ferromanganese.

MANUFACTURERS OF: Electrical Wires and Cables, Copper, Brass, Bronze and other Copper Alloys in such forms as Sheet, Plate, Tube, Pipe, Rod, Wire, Forgings, Stampings, Extrusions, Flexible Metal Hose and Tubing.

EIMCO

FOR PRODUCTION LOADING

"An Eimco loader is the most efficient tool underground." This statement made by mining men and contractors, with years of experience at their job, is an expression of complete satisfaction. They use their Eimco equipment continuously because it does their job better than anything else.

Eimcos are built to take the necessary long working shifts this type of work requires. The husky alloy-steel castings, shafts and gearing provide the needed extra strength and durability.

Eimcos use independent motor drives for each machine function. This means less power used in an intermittently operating machine. Costs less to operate.

Many other features of Eimcos make them the choice by the majority of the men working underground. Write today for information on the correct size Eimco for your job.

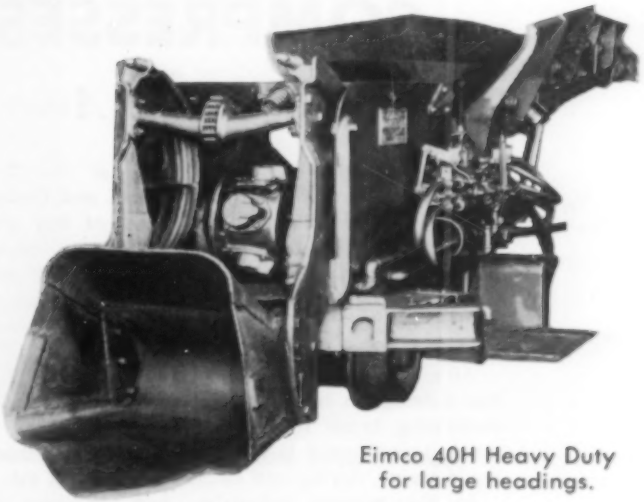

Eimco 40H Heavy Duty for large headings.

You Can't beat an Eimco

EIMCO

THE EIMCO CORPORATION

The World's Largest Manufacturers of Underground Rock Loading Machines

EXECUTIVE OFFICES AND FACTORIES — SALT LAKE CITY 10, UTAH, U. S. A.

BRANCH SALES AND SERVICE OFFICES:

NEW YORK, 51-52 SOUTH STREET • CHICAGO, 3319 SOUTH WALLACE STREET
BIRMINGHAM, ALA., 3140 FAYETTE AVE. • DULUTH, MINN., 216 E. SUPERIOR ST.
EL PASO, TEXAS, MILLS BUILDING • BERKELEY, CALIFORNIA, P. O. BOX 240
KELLOGG, IDAHO, 307 DIVISION ST. • LONDON W. 1, ENGLAND, 190 PICCADILLY

IN FRANCE: SOCIETE EIMCO, PARIS, FRANCE
IN ENGLAND: EIMCO (GREAT BRITAIN) LTD., LEEDS 12, ENGLAND
AGENTS IN ALL PRINCIPAL CITIES THROUGHOUT THE WORLD

A 36J

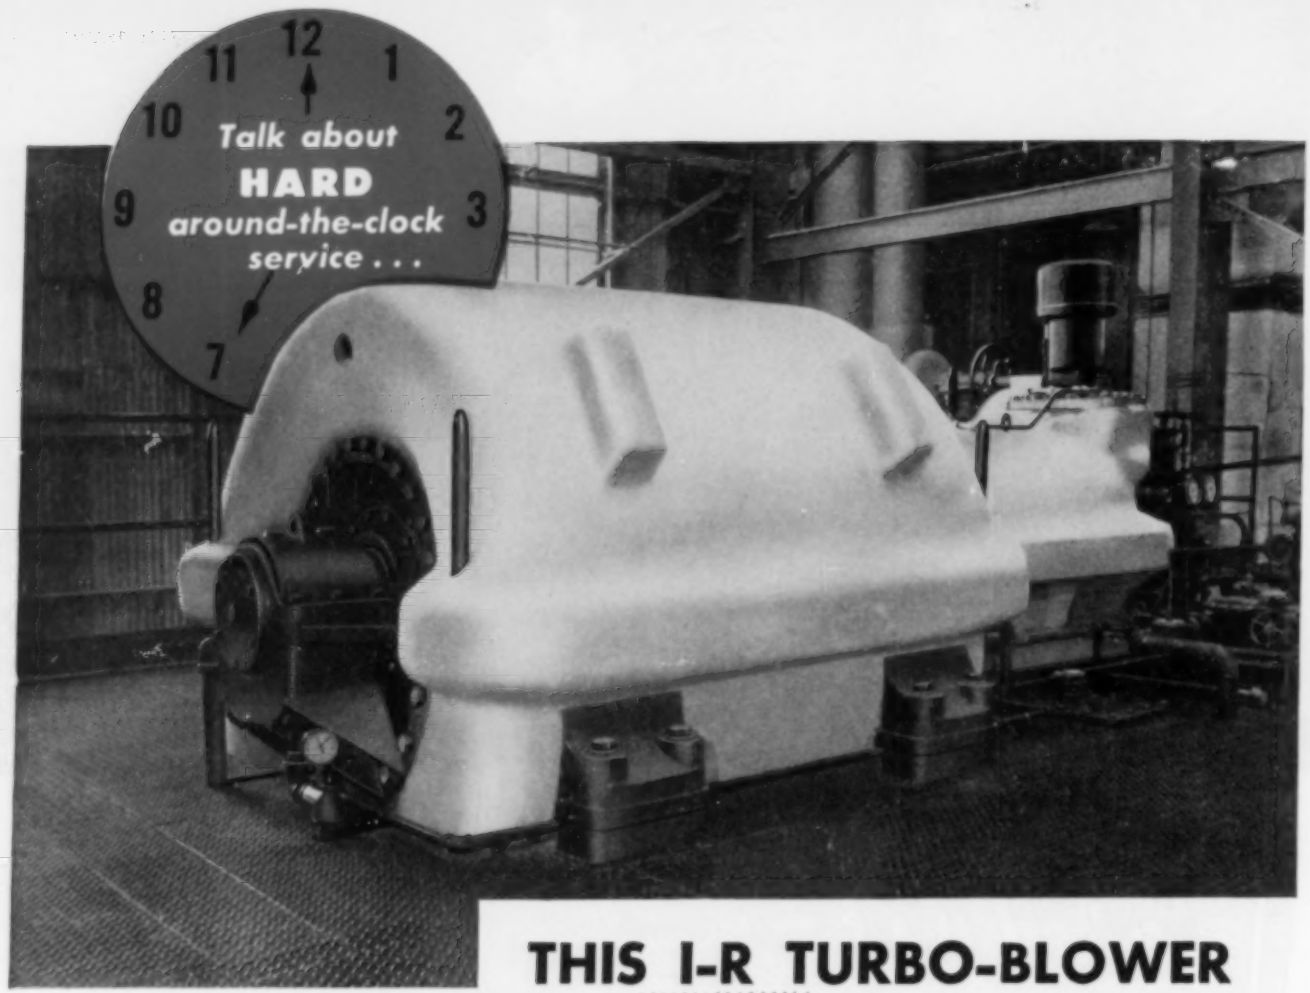

THIS I-R TURBO-BLOWER COMPRESSES 648°F FLUE GAS

at American Potash and Chemical Corp.

The Ingersoll-Rand Turbo-Blower at the Trona, California plant of American Potash and Chemical Corporation compresses 20,000 cfm of flue gas to 13 psig. Since the temperature of the gas, which is taken from the oil-burning boilers, is 648° F. at the blower discharge, the unit is heavily lagged. The blower and its 1265 hp turbine operate continuously 24 hours a day. *There is no spare.*

After being compressed the flue gas (13-14% carbon dioxide) is bubbled through carbonating towers containing brine from nearby Searles Lake. The precipitate formed is further processed by thickening, filtering, drying and calcining into soda ash.

In the process industries, and wherever large volumes of air or gas must be compressed to moderate pressures, over 3,000,000 horsepower of I-R Turbo-Blowers are repeatedly proving their economy and dependability in delivering oil-free and pulsation-free air or gas.

Ingersoll-Rand Turbo-Blowers are designed and built so as to guard against costly interruptions that could shut down your entire plant. For example, one I-R 11,000 hp Turbo-Blower was opened for inspection after six war-time years of continuous service. It was in good condition. While we don't approve of neglecting periodic inspection and maintenance, we are proud that the original low power consumption of this unit was not affected . . . that there was no costly maintenance . . . and that production was not interrupted.

I-R manufactures Turbo-Blowers in all sizes: to 20,000 hp, to 150,000 cfm, to 110 psig and higher. Therefore, whatever your blower application, Ingersoll-Rand can design and supply the Turbo-Blower that's right for the job—a blower you can depend on for constant delivery of air or gas at the lowest possible cost.

Ingersoll-Rand

11 BROADWAY, NEW YORK 4, N. Y. 725-12

COMPRESSORS . AIR TOOLS . ROCK DRILLS TURBO-BLOWERS • CONDENSERS • CENTRIFUGAL PUMPS • DIESEL AND GAS ENGINES

It doesn't take a heavyweight to do a man-sized job

Before these shears were shifted to air operation the entire weight of a man was required on the foot treadle to cut the sheet metal.

All this is changed now. A light touch of the girl's foot on the pedal puts all the power of the Schrader Air Cylinder to work, sending the knife-edge through the metal.

This is just one example of how air cylinders can speed up production and reduce fatigue . . . one of many hundred applications of Schrader cylinders and valves. You can undoubtedly find many places in your shop where manual lifting, lowering, pushing or pulling is slowing up production.

To find out how Schrader air control products can be put to work for you . . . to boost production—lessen operator fatigue—increase safety . . . send us a letter outlining your particular installation, your idea or fill out the coupon below.

Schrader
REG. U. S. PAT. OFF.

products control the air

Air Cylinders • Operating Valves • Press & Shear Controls • Air Ejection Sets • Blow Guns • Air Line Couplers • Air Hose & Fittings • Hose Reels • Pressure Regulators & Oilers • Air Strainers • Hydraulic Gauges • Uniflare Tube Fittings

Mail This Coupon Today

A. SCHRADER'S SON
Division of Scovill Manufacturing Company, Incorporated
478 Vanderbilt Avenue, Brooklyn 17, N. Y., Dept. W-3

I am interested in more information on.....

Name_____ Title_____

Company_____

Address_____

ON TOP

or

UNDERGROUND

it's
CRUCIBLE
HOLLOW
DRILL STEEL
all the way



Whether driving a tunnel or clearing a mountain pass — tough Crucible Hollow Drill Steel gets the job done better, faster — at lower cost per foot drilled. This quality steel is built to take the punishment of around-the-clock operation of modern, high air-pressure rock drills. And you have the assurance of minimum breakage . . . and an end to expensive bit loss.

That's because of Crucible's rigid *pre-testing* of every *lot* of Crucible Hollow Drill Steel. What's more, Crucible Hollow Drill Steel is backed by the experience of quality steelmakers. Then too, field metallurgists with broad background on *your* job are available — should you need them.

Insure the quality of your job — cut costs — use Crucible Hollow Drill Steel.

CRUCIBLE first name in special purpose steels

52 years of Fine steelmaking **HOLLOW DRILL STEEL**

CRUCIBLE STEEL COMPANY OF AMERICA, GENERAL SALES OFFICES, OLIVER BUILDING, PITTSBURGH, PA.

REX HIGH SPEED • TOOL • STAINLESS • ALLOY • MACHINERY • SPECIAL PURPOSE STEELS

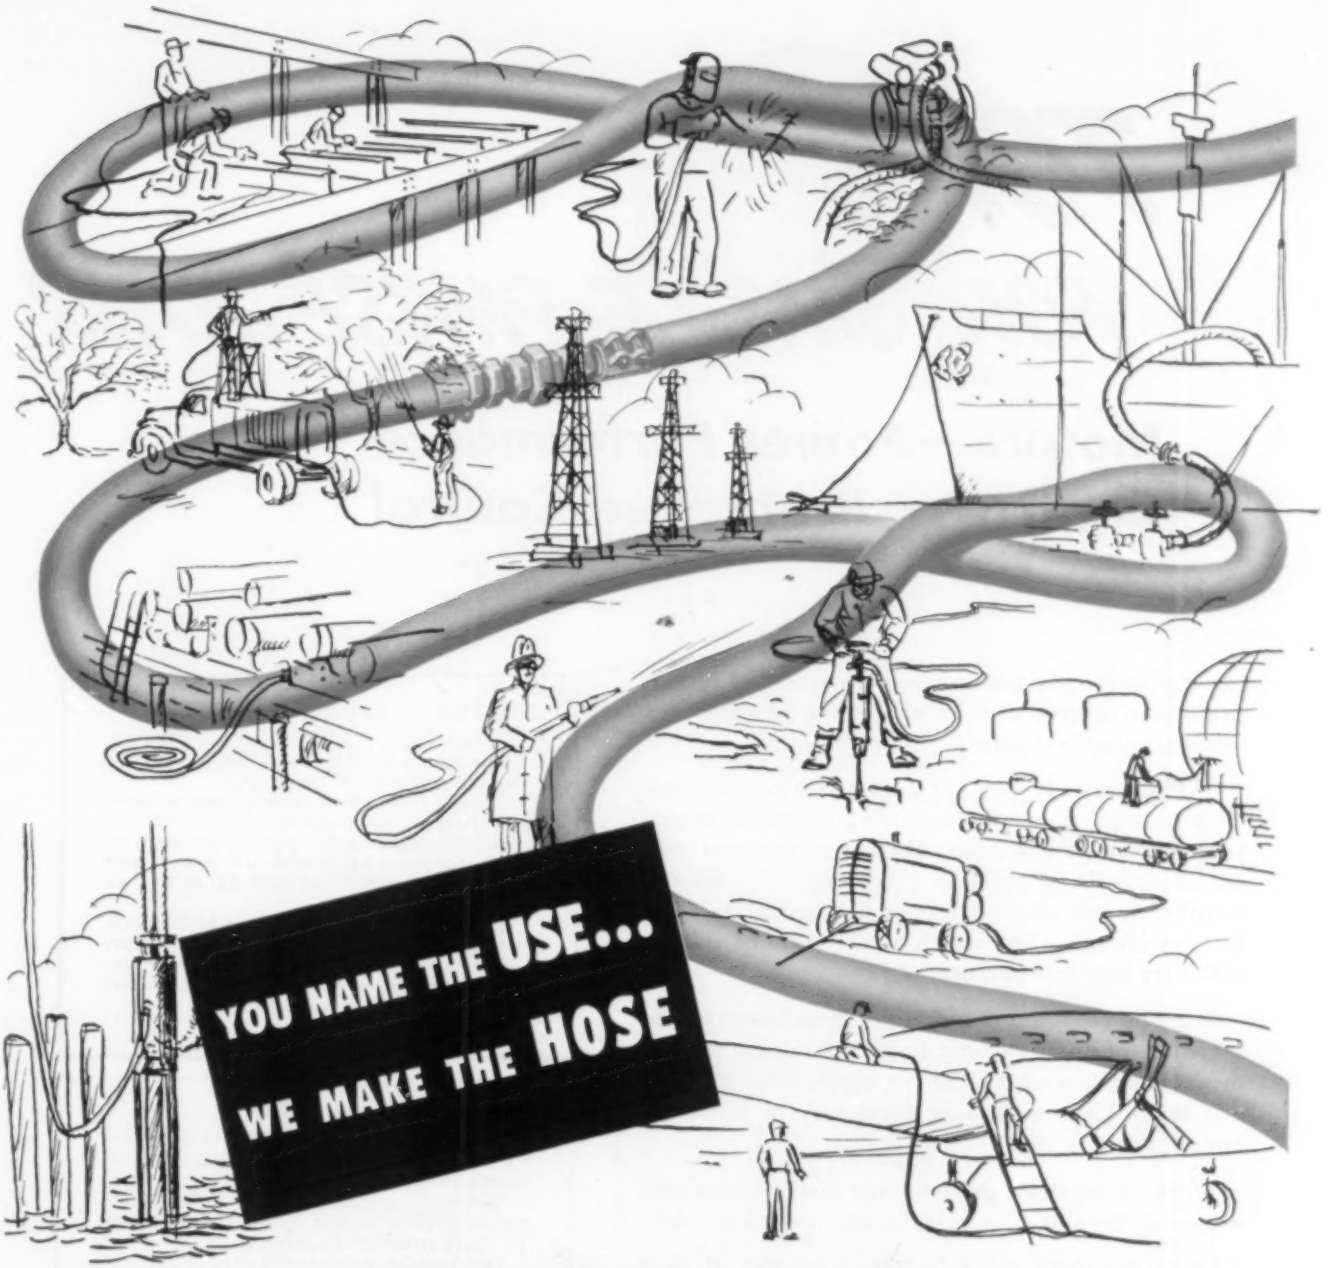

Our Condor Homoflex Hose is an example . . . Raybestos-Manhattan engineers found a way to build strength into a hose-wall without simply adding weight and thickness in more plies. The result, this Hose is flexible as a rope . . . and a real labor saver wherever men must constantly work with hose. On the other hand, Raybestos-Manhattan makes the world's *largest* and *heaviest* hose for oil drilling and loading, and for suction • Hose may not be your problem today, but whenever you think of industrial rubber products . . . transmission, conveyor, V-belts, or hose . . . remember R/M engineers have developed exclusive features to give you more for your money in every use. Consult your R/M representative.

R/M

MANHATTAN RUBBER DIVISION — PASSAIC, NEW JERSEY

RAYBESTOS-MANHATTAN, INC.



Other R/M products include: Industrial Rubber • Fan Belts • Radiator Hose • Packings • Brake Linings • Brake Blocks Clutch Facings • Asbestos Textiles • Sintered Metal Parts • Bowling Balls

TOPS
FOR SINGLE-PHASE JOBS

Motors—Power Performance
Controls—Protective Control

Get top single-phase motor performance and protective motor control with Westinghouse capacitor motors and reliable controls.

CAP motors—(1 to 3 hp) . . . and CAP-2 motors—(5 & 7½ hp) have ample starting torque to master your toughest application. They're constructed with pre-lubricated, factory-sealed bearings . . . die-cast rotors . . . and all-steel frames and brackets. These features are but a few which assure years of stamina with very low maintenance.

Both Life-Linestarter® and Motor Watchman® use the same line of overload relay heaters, reducing replacement heater inventory. Their straight-through wiring and many knockouts make them easy to install for any application.

Working together, these motors and controls spell dependability and economy! Put 'em to work and save!

Learn the many other facts and features of these Westinghouse Motors and Controls. Ask your Westinghouse representative or write for free booklets B-5441 (covering motors), B-4677 (covering Life-Linestarters) or B-5256 (covering NEMA 1-A Motor Watchman), Westinghouse Electric Corporation, P.O. Box 868, Pittsburgh 30, Pennsylvania. J-21675

MOTOR FEATURES:

Pre-lubricated . . . factory-sealed bearings. Grease sealed in, dirt sealed out. You never need lubricate these bearings.

Die-cast rotors have no windings to burn out or break . . . no brushes to adjust or replace.

Built-in capacitors give high-starting torque for heavy loads with low-line voltage drop. CAP-2 motor has running, as well as starting, capacitor.

All-steel construction assures high-shock resistance . . . makes a smaller, lighter motor.

Tuffernell® insulation of maximum dielectric strength, gives protection against moisture, abrasives and mild chemicals.

CONTROL FEATURES:

Foolproof overload protection provided by snap-action bimetallic disc. Permanently retains calibration.

"De-ion®" arc quenchers . . . extinguish arc in ½ cycle or less. Contacts last longer . . . give trouble-free service.

Quick-make, quick-break over-center toggle mechanism on Motor Watchman . . . reduces arcing time, maintenance costs.

Straight-through wiring has line leads at top . . . load leads at bottom. Ample wiring space and knockouts speed installation.

Motor Watchman safety latch holds switch in "Off" position, protects when servicing.

YOU CAN BE SURE . . . IF IT'S

Westinghouse

SINGLE-PHASE MOTORS and CONTROLS

Capacitor Start—Capacitor Run Motor, 5 and 7½ hp . . . Controlled by the Life-Linestarter.

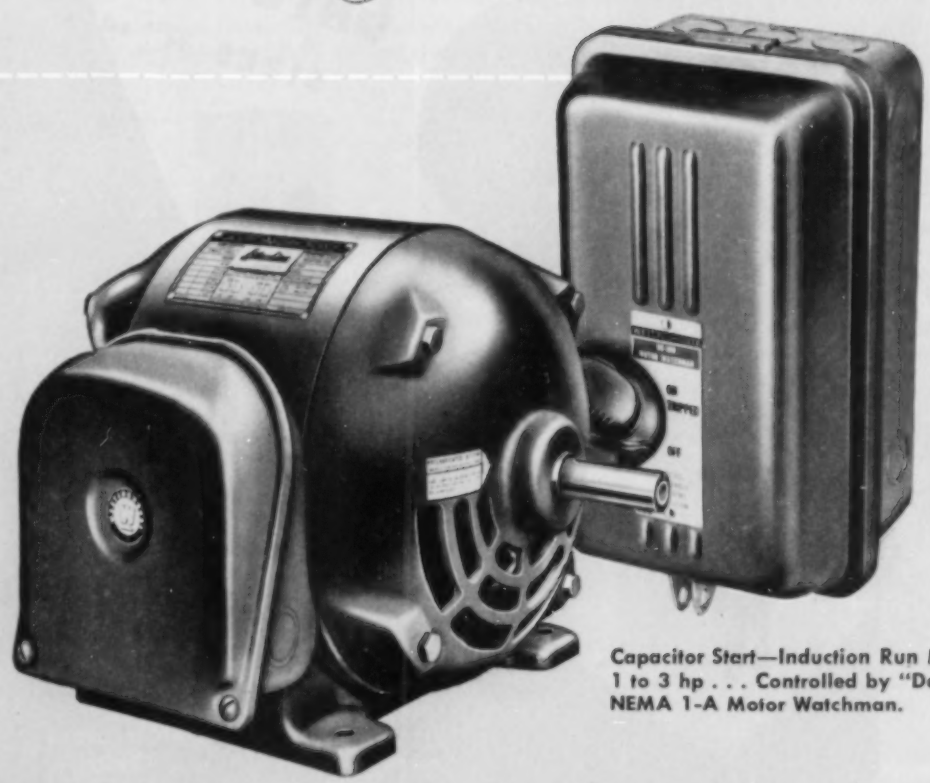

Capacitor Start—Induction Run Motor, 1 to 3 hp . . . Controlled by "De-ion" NEMA 1-A Motor Watchman.

NEW

SERIES 12100*

FORGED STEEL

DROP

Vogt

BOLTED BONNET
BOLTED GLAND

150-800 POUND

GATE VALVES

SIZES 1/4" to 2"

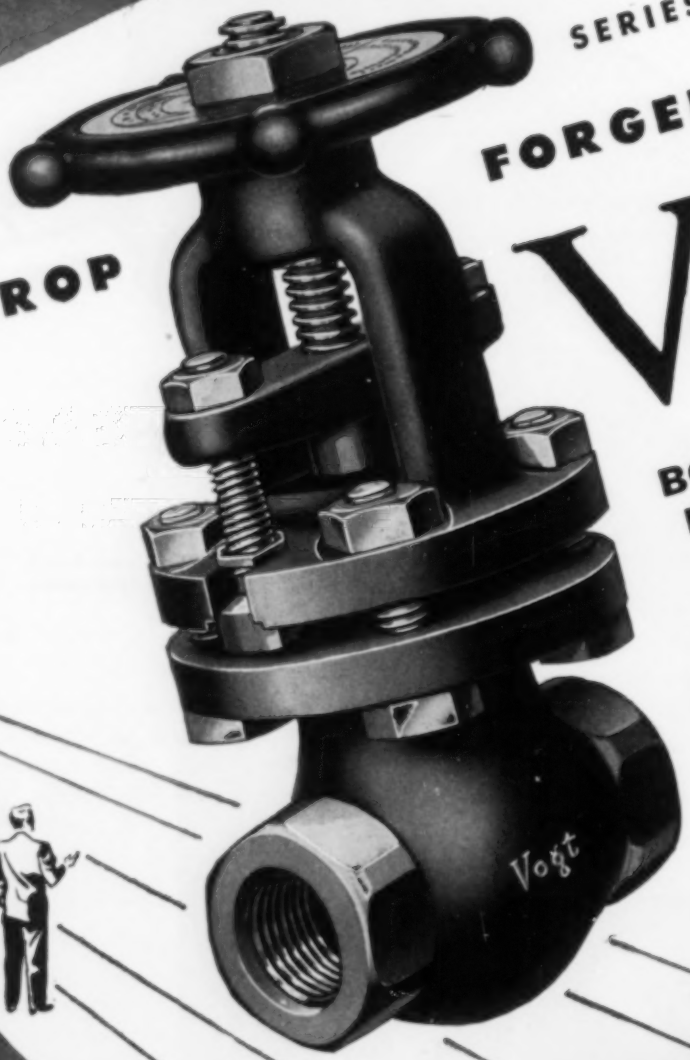



***Series 12100**

CARBON STEEL { 800 Pounds @ 750°F.
1500 Pounds Cold Non-Shock

For 150-800 pounds service • Round Bolted Bonnet • Bolted Gland • Gasket or Ground Joint • Outside Screw and Yoke • Renewable Seat Rings • Solid Wedge — Slotted Type • Rising Stem 11½-13% Chrome Stainless Steel Trimmings • Sizes 1/4" to 2" inclusive.

HENRY VOGT MACHINE CO. *Louisville 10, Ky.*

BRANCH OFFICES: NEW YORK • PHILADELPHIA • CLEVELAND • CHICAGO • ST. LOUIS • DALLAS

Abrasive Ores No Match for Modern Drilling Equipment

Modern rock drills, carbide-tipped bits, and Bethlehem hollow drill steel make a winning combination for drilling abrasive sulphide ores at the properties of New Park Mining Company, Keetley, Utah. Although lead and zinc are the principal ores mined on their 5000-acre property, smaller amounts of copper, silver and gold are also recovered.

In drilling hard, abrasive diorite on the 1500-ft level of the Mayflower Mine, for example, modern jumbo-mounted drifters are used to put in 6-ft holes with 1⅛-in. round Bethlehem hollow drill steel and detachable bits having tungsten-carbide inserts.

A stope on the 1020-ft level provides ore that is somewhat easier to drill. Here they use 1-in. quarter-octagon Bethlehem hollow drill steel and conventional detachable bits to put in blast holes 5 ft deep with fast-drilling stopers.

Organized in 1932, New Park Mining Company now has about 225 employees. From the beginning of their operations they have relied on Bethlehem hollow drill steel for low-cost drilling.

Stocked in all popular sections and sizes, this "old reliable" steel is available for prompt shipment from local converters or our mill depot.

BETHLEHEM STEEL COMPANY, BETHLEHEM, PA.

On the Pacific Coast Bethlehem products are sold by Bethlehem Pacific Coast Steel Corporation. Export Distributor: Bethlehem Steel Export Corporation

★ BETHLEHEM STEEL ★

Underground operations of New Park Mining Co., Keetley, Utah, are served by a steel reconditioning shop, compressor plant, and other facilities at the portal of the Mayflower tunnel.

Jumbo-mounted drifters, using Bethlehem drill steel and carbide-tipped bits, put in holes 6 ft deep. This fissure traverses hard diorite porphyry 3 to 8 ft wide with bands of sulphides in quartz gangue.

All aboard! The work shift starts underground at the Mayflower Mine.

Stopers on the 1020-ft level drill holes 5 ft deep, using Bethlehem hollow drill steel and conventional detachable bits. This fissure is 7 ft wide with banded lead-zinc sulphides.

BETHLEHEM HOLLOW DRILL STEEL

More and More Longer Lasting Norbide* Nozzles...

... are bringing

increased efficiency

to pressure blast cleaning

Molded from "the hardest material made by man" Norbide Nozzles outwear conventional cast iron nozzles hundreds of times . . . their orifices do not readily enlarge and thus the stream of sand or shot remains concentrated . . air pressure does not drop.

Write for free bulletin #543 to:

Norton Company

Worcester 6, Massachusetts

*Reg. trade-mark

ON THE COVER

EVERY newspaper reader in the nation learned of the Corning Glass Works when it was engaged in the exacting job of turning out the mirror for the Mt. Palomar telescope in California. That was the biggest undertaking in glass in our times and one that had everybody connected with it jittery until the huge piece was safely on its way westward. Even an outsize casting of this type has to be scrutinized for defects that may be too small to escape the unaided eye. Our cover picture shows a Corning technician climbing around the reinforced ribbing of the reflector to check it with an optical instrument.

•

IN THIS ISSUE

NOT many American cities have hills so high and steep that they interrupt streets. This is true, however, in San Francisco, where the loftiest elevation, Russian Hill, separates the two ends of Broadway. That thoroughfare is now being made continuous by tunneling the hill with twin, 2-lane vehicular bores. Bad ground created unexpected difficulties, but the contractor, Morrison-Knudsen Company, Inc., holed through one tube on January 18 and expects to complete the job next summer. Our leading article gives the details.

•

IT IS hard to keep up with the Corning Glass Works. Periodically we review its activities, but it expands so fast and finds so many new channels to follow that our articles soon grow out of date and incomplete. In this issue we sketch the history of glassmaking and set down some of the recent accomplishments of the glass wizards at Corning. Page 67.

•

ONLY a few years ago a mining company with but one mine usually ceased to exist when it ran out of ore. Nowadays management is more farsighted and seeks to perpetuate the business. When Sherritt-Gordon Mines Ltd. realized more than ten years ago that its base-metal deposit at Sherridon, Manit., was nearing exhaustion it launched a large-scale exploration program and found huge bodies of nickel-copper-cobalt 150 miles to the north. Mining ceased at Sherridon last fall and will be resumed late in 1953 at the new location, Lynn Lake, with pretty much the same equipment and people. By that time the move will have cost $45,000,000 and taken more than eight years. Page 74.

Compressed Air Magazine

COPYRIGHT 1952 BY COMPRESSED AIR MAGAZINE COMPANY

VOLUME 57 **March, 1952** NUMBER 3

G. W. MORRISON, *Publisher*
C. H. VIVIAN, *Editor* J. W. YOUNG, *Director of Advertising*
ANNA M. HOFFMANN, *Associate Editor* J. J. KATARBA, *Business Mgr.*
J. C. PIERCE, *Assistant Editor*
A. W. LOOMIS, *Assistant Editor* JOSEPH C. DILTS, *Advertising Mgr.*
D. Y. MARSHALL, Europe, 243 Upper Thames St., London, E. C. 4.
F. A. MCLEAN, Canada, New Birks Building, Montreal, Quebec.

EDITORIAL CONTENTS

San Francisco Tunnels Historic Russian Hill—*L. A. Luther* 62
Glass is Coming of Age—*J. C. Pierce* 67
Moving a Mine 150 Miles—*C. H. Vivian* 74
Blowing Damaged Cotton from Bales 80
This and That 81
Psst! The Muquis!—*Virginia Holmgren* 83
Editorials—The Bit that Made Good—The French Look at Us—The Distaff Side 84
Nothing New About Pneumatic Mattresses 85
Man-Made Gravel 85
Industrial Notes 86
Books and Industrial Literature 92

ADVERTISING CONTENTS

Adams Co., Inc., R. P. 37
Anaconda Copper Mining Co. 8
Bethlehem Steel Company 17, 36
CCA Division - Breco Mfg. Co. 40
Combustion Engineering - Superheater, Inc. 33
Compressed Air Magazine Co. 44
Cook Mfg. Co., Inc., C. Lee 28
Coppus Engineering Corporation ..... 2nd Cover
Crucible Steel Co. of America 12
Detroit Diesel Engine Division 7
Dollinger Corporation 3
du Pont de Nemours and Co., E. I. 27
Eimco Corporation, The 9
Elliott Company 35
Fluor Corporation, Ltd., The 4, 5
Galland-Henning Mfg. Co. 20
Garlock Packing Co., The 30
General Electric Company 41, 42
Goodall Rubber Company 43
Goodrich Company, The B. F. 26
Hose Accessories Company 25
Ingersoll-Rand Company ..... 10, 32, 39, 3rd Cover
Johnson Corporation, The 43
Koppers Company 45
Manhattan Rubber Division 13
Maxim Silencer Co., The 22
Naylor Pipe Company 21
New Jersey Meter Company 40
Niagara Blower Company 23
Norgren Co., C. A. 44
Norton Company 18
Raybestos-Manhattan, Inc. 13
Rucker Company, The 43
Sarco Company, Inc. 6
Sauerman Brothers, Inc. 40, 44
Schrader's Son, A. 11
Square D Company 44
Terry Steam Turbine Co., The 34
Texas Company, The ..... Back Cover
Timken Roller Bearing Co., The 38
Toledo Pipe Threading Machine Company, The 31
Victaulic Company of America 24
Vogt Machine Company, Henry 16
Walworth Company 29
Westinghouse Electric Corp. 14, 15
Wisconsin Motor Corporation 19

A monthly publication devoted to the many fields of endeavor in which compressed air serves useful purposes. Founded in 1896.

CCA Member Controlled Circulation Audit

Published by Compressed Air Magazine Co., G. W. MORRISON, *President;* C. H. VIVIAN, *Vice-President;* J. W. YOUNG, *Secretary-Treasurer.*
Editorial, advertising, and publication offices, Phillipsburg, N. J.
New York City Office, 11 Broadway. L. H. GEYER, *Representative.*
Annual subscription: U.S., $3.00; foreign, $3.50. Single copies, 35 cents.
COMPRESSED AIR MAGAZINE is on file in many libraries and is indexed in Industrial Arts Index and in Engineering Index.

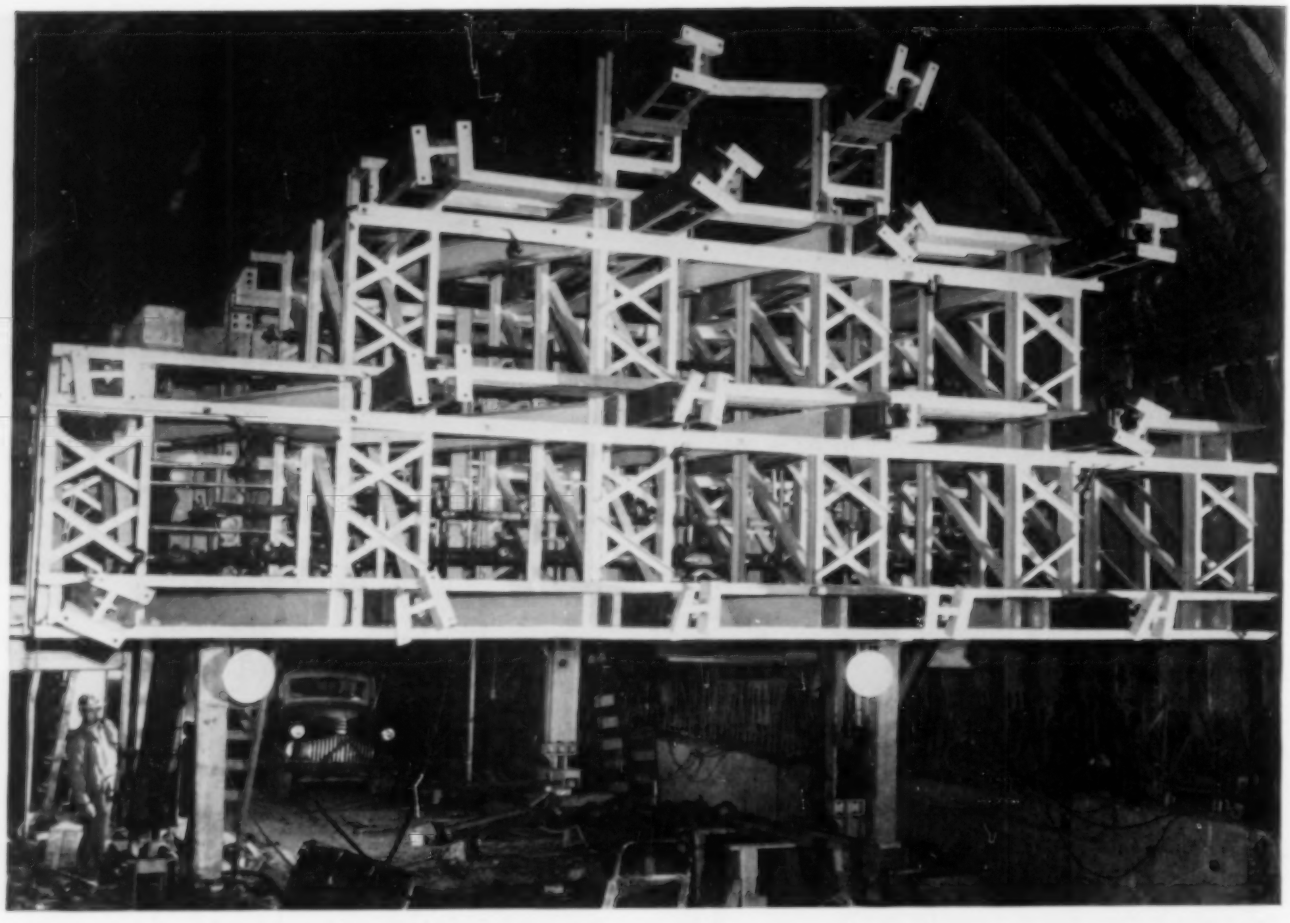

CONQUERING SOFT GROUND

Finding it necessary to erect supporting steel immediately after excavating in order to hold up the shifting ground, the contractor devised a breastboard jumbo. Hydraulic jacks in front hold boards against the face to prevent cave-ins and others in rear shove the carriage forward on its wide-gauge rails. The upper view shows the front of the jumbo and the lower one its top deck where one of two Tugger air hoists (foreground) is holding an arch rib of a steel set while workers prepare to raise it into place with jacks on each side.

San Francisco T

WEST PORTAL

Steel beams were first driven along the lines of the retaining walls at the sides so the section between them could be excavated and were then encased in concrete. Over the twin bores is the ventilation building with square holes through which fresh air will be drawn in.

o Tunnels Historic Russian Hill

Interior of Supposedly Solid Height Proves So Unstable that Special Equipment Is Required

L. A. Luther

WITH the coming of the winter rains a lush growth of grass and weeds literally springs from the cobbles on several streets in San Francisco, Calif. These thoroughfares, with their ancient hand-laid paving, lie at such rakish angles that vehicles, even modern motor cars, run risks when attempting to negotiate the grades. The metropolis still has a considerable mileage of sharply tilted streets ascending its many hills, but the city fathers wisely erected stout barriers at certain points to halt drivers so witless as to attempt to tackle the more dangerous reaches. Even the intrepid cable-car builders of the past century wisely skirted the peaks, leaving their residents to climb stairs or pant up corrugated, non-skid walks.

San Francisco's Broadway extends west from the wide Embarcadero with an apparent intent of living up to its name. It is among the broadest of the city's streets, ascending from the waterfront at an easy grade until it suddenly runs into steep Russian Hill. There, out-of-town visitors may well pause to conjecture whether the boulevard was built especially to carry them to the celebrated fleshpots of Alfred's Restaurant or to the handsome old Nuestra Senora de Guadalupe, the only church in San Francisco in which masses are still said in Spanish.

Since 1856 the citizens have been periodically discussing plans for making Broadway take them somewhere instead of causing them to detour through narrower streets around Russian Hill. Some chose to tunnel the obstruction, others to dig a vast open cut, a task that would have proved difficult judging by subsequent events. San Francisco's Bay and Golden Gate bridges that greatly facilitate travel, and the spiraling population on the Pacific Coast, have increased the need of converting Broadway into a real through way; and with that end in view a bond issue was approved by voters in the 1946 election.

It was decided to tunnel the hill, and the project now underway extends for a total distance of 3300 feet, with a portal to portal length of 1616 feet. It involves driving twin bores, each 28½ feet wide and providing two traffic lanes and a sidewalk. Throughout most of their length, the tubes will be 35 feet apart, with closer spacing at the portals, and the maximum grade will be 3 percent. The tunnels will be lined with light ceramic tile, will be suitably illuminated, and ventilated by blowers in housings at the portals. The plans for

the undertaking were prepared under the direction of the City Engineer and the Director of Public Works, with Ole Singstad, of New York, retained by the municipality to assist with design. A contract was awarded on February 8, 1950, to Morrison-Knudsen Company, Inc., on a bid of $5,253,552, with May 1, 1950, set as the official starting date and April 30, 1952, as the completion date.

It is indicative of the metropolitan character of the location where the work is in progress that the city had to purchase 40 parcels of land in order to secure the essential right-of-way for the approaches and portal structures. Some of the apartment houses and single-unit dwellings were demolished, others were moved back out of the way. It can be appreciated that the city and the contractor faced considerable legal and public-relations problems in carrying out a project of this kind in a thickly populated area.

Russian Hill rises to a height of 360 feet, nearly 100 feet higher than Telegraph Hill, the "Loma Alta" of the Spaniards from which a fire signal was flashed to the city on October 29, 1850, to spread the news of California's admission to the Union. Though lower, Telegraph Hill lay a little closer to San Francisco as it was in those days and for that reason was probably chosen to carry the semaphore that relayed signals from the lookout on Point Lobos in the Golden Gate announcing approaching ships.

Russian Hill is said to have taken its name from a small Russian graveyard on its summit. It provided a spectacular setting for a gibbet erected there for San Francisco's first public execution. While nearby Nob Hill was attracting tycoons of the Comstock Lode and the railroad era, Russian Hill was accumulating a colony of writers and artists—Helen Hunt Jackson, Ambrose Bierce, Joaquin Miller, Peter B. Kyne, Mary Austin, Kathleen and Charles Norris, among others, who found inspiration in its vistas and sunsets. Commuting up its grades by cable car sparked Gelett Burgess' Ballad of the Hyde Street Grip:

> Rush her on the crossing, catch her on the rise
> Easy round the corners when the dust is in your eyes!

A large percentage of Russian Hill's present population is Chinese, and this presented a language barrier in many instances to the dozen engineers and architects assigned by Morrison-Knudsen, under direction of the project's assistant manager, to examine, photograph, and make notes on every room in adjacent buildings, as well as every foundation and retaining wall. Some engineers having Oriental ancestry were hired for this purpose, and the contractor found property owners, who accompanied parties preparing this documented record or had representatives on hand, both fair and coöperative. Relocating sewer, water and power lines necessitated a great deal of preliminary work which, except for the sewers which were taken care of by the contractor, was done by the city and the utilities concerned.

Cable car versus bus has become a *cause celebre* in San Francisco. Cable-car fans claim that the ancient vehicles, which look a little like Concord coaches on flanged wheels whose drivers manipulate big levers instead of whips, are ornaments and tourist attractions, while the more prosaic champions of the bus condemn them as a time-wasting relic. The two remaining cable lines operated by the city cross Broadway at Hyde and Mason streets, and it was something of a cross for their riders to have the tunnel project interrupt service on both just when the California Street line was tied up with a broken cable and because of an empty purse. Leland Stanford built the latter at great cost for the dual purpose of making San Francisco's other cable lines look shoddy by comparison and to provide sure-fire transport to his home atop steep Nob Hill. But with the contractor's completion of stretches of new track on Mason and

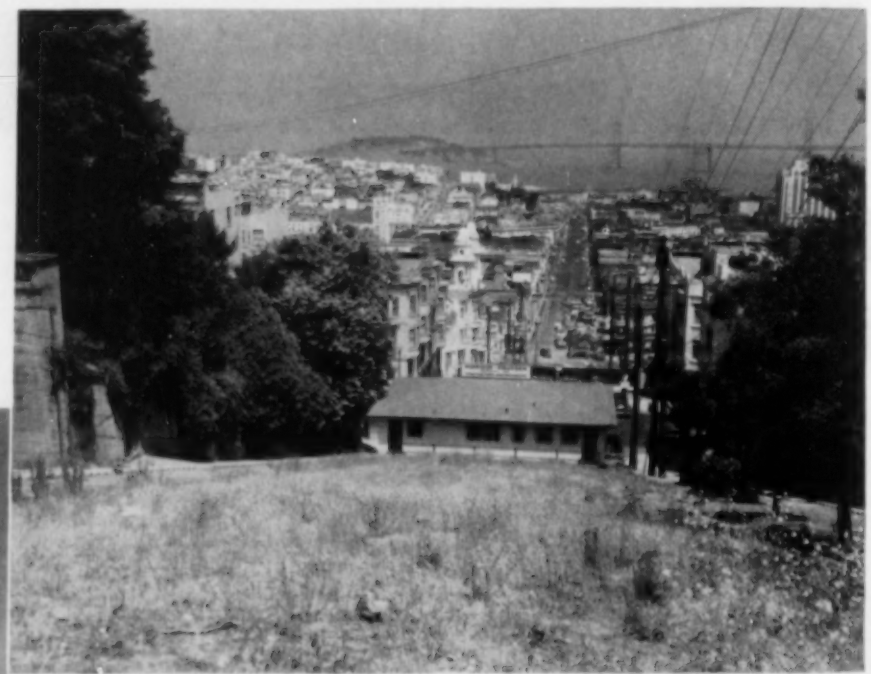

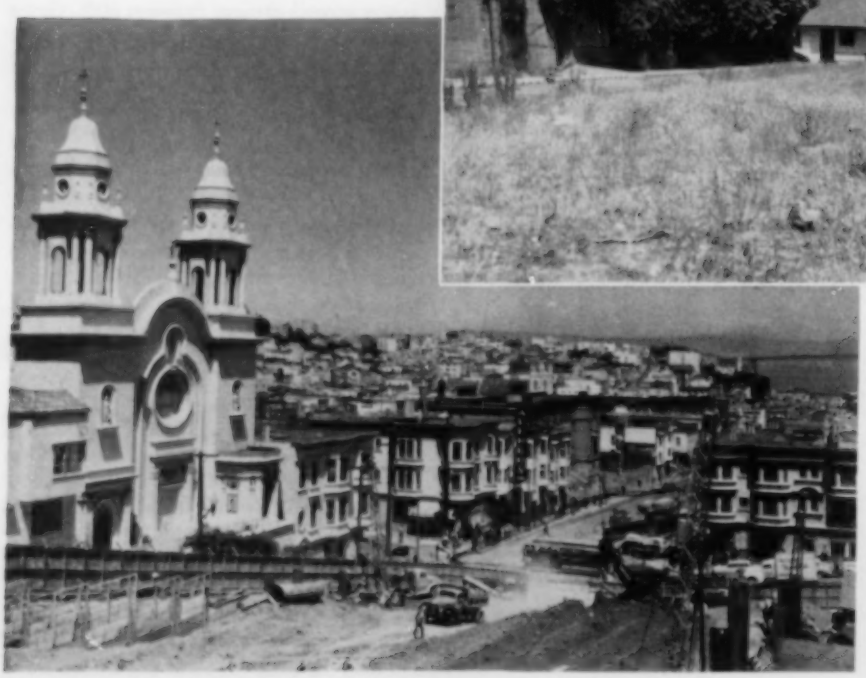

VIEWS FROM HILL

Rising 360 feet, Russian Hill is the loftiest of Frisco's noted heights. Near the top, Broadway is so steep that it defies vehicular travel and grass grows among the cobbles, as evidenced by the view above. The building in the center is the Morrison-Knudsen field office. Prominent in the other picture is Nuestra Senora de Guadalupe Church, where masses are still said in Spanish.

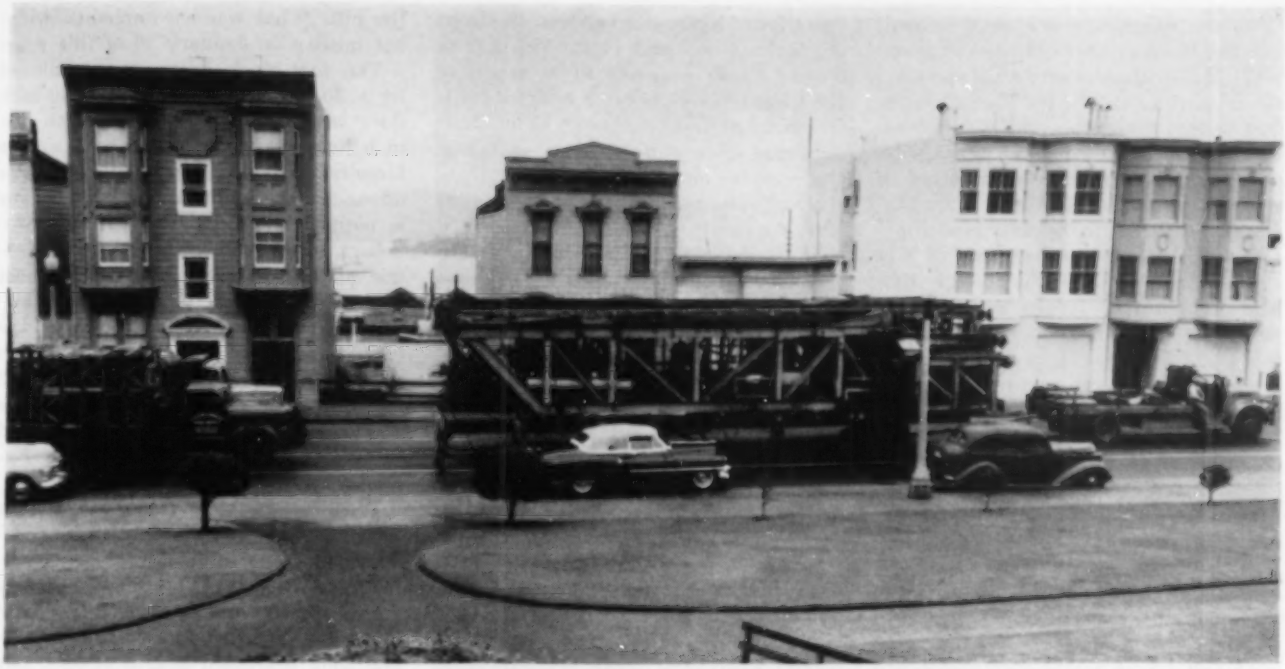

MOVING BREASTBOARDING JUMBO

After one of the twin bores had been driven from east to west, the huge carriage was taken back by a circuitous route to begin its trip through the other one in the same direction. It is shown being hauled along Bay Street on house-movers' dollies with cables attached to one truck ahead and two behind.

CHECKING ON SHOCK

Expecting sound rock and extensive blasting, the contractor hired twelve photographers to record structural conditions of every building in twelve neighboring blocks before beginning the work so that any claims for damage that might be lodged subsequently could be checked. Actually, conditions are such that no heavy blasts are fired, but the intensity of each one is nevertheless closely noted. Here Harry Kirmond, assistant project manager, is all set to take a seismograph reading.

Hyde, and with the city buying a new cable for California Street, the cable-car fans are again riding high.

Data on test borings submitted to the contractor indicated that the formation near the portals was a somewhat shattered Franciscan sandstone, with a hard blue sandstone rated as self-supporting farther in the hill. Unit bids were based on two types of tunnel: an A-section in unstable ground for which a supporting 3-foot-thick concrete lining and a 3½-foot invert were specified, and a B-section with a 2-foot lining without an invert. It was estimated that more than 100 feet at both portals would require the heavier A-type lining.

The contractor had expected to use heavy drifters and to drive the twin bores by the top-heading method, placing wall plates and steel arch ribs first and then removing the central cores with an electric shovel equipped with a shortened boom and dipperstick. But because of the formations encountered he had to change his plans in respect to tunneling, lining and portal structures. As a matter of fact, it has been necessary to secure a time extension on this job, and it has been only through careful engineering and the devising of special equipment that work has been carried out as expeditiously as it has. But before we discuss these phases of the project, let us note the elaborate measures that were taken preparatory to excavating at the east portal to prevent settlement and consequent damage to surrounding structures.

Holes were drilled outside of the excavation lines to a point several feet below final subgrade, some extending to a depth of 65 feet. In them were set "soldier beams"—big I-beams as much as 36 inches in section and weighing 230 pounds per foot. Around them was poured concrete, and all the beams in a row were attached to one another and to those along the opposite edge of the excavation by a rigid assembly of heavy structural steel. The spaces between the beams was filled with wood lagging as earth removal progressed.

This massive grillwork was designed to support a heavier load than permanent walls could carry, and to determine the actual burden imposed on this protective falsework electronic strain gauges were placed on the struts and diagonals. Expansion of the steel on hot days was found to produce extremely heavy strains, and to minimize it the contractor resorted to painting exposed steelwork with aluminum paint, covering some with aluminum foil, and even keeping some surfaces wet.

Nothing in the data supplied by the city indicated that the material between Mason and Taylor streets at the east approach and portal section was not original ground; but when the excavators continued to a depth of as much as 35 feet in rubbish-filled earth, search disclosed a photographic record of an arroyo that had existed at that point and had been used later as a dump. On the basis of this fact, and that the fill carried a great deal of water, the city elected to revise its plans for the retaining walls and ventilating structure.

As the contractor proceeded according to plan and drove top-heading and wall-plate drifts, the entire hill appeared to be settling slowly for a distance of 200 feet. In consequence, it became necessary to pour concrete footings on which to set tunnel ribs constructed of wide-flange 10-inch I-beams. Simultaneously digging in the shattered limestone interspersed with seams of wet clay and placing steel ribs posed a difficult problem, and it was evident from what was experienced in advancing the two 12x12-foot foot-block drifts that the ground was unstable and required continuous support.

At this juncture Lyman Wilbur, chief engineer for M-K, was called into consultation and conceived the idea of using a large breastboard jumbo on a wide-gauge rail mounting. From this structure the heading could be carried forward, and from its upper deck the arch ribs could be hoisted and jacked into position. While the jumbo was being built and set up in the east portal, the foot-block drifts were driven with J-50 Jackhamers on Jackleg mountings, clay diggers and conventional mine cars and muckers while footings for the arch ribs were poured with Pumpcrete equipment.

In operating the unique breastboard jumbo, a central plant supplies power to batteries of hydraulic jacks on the front or working end and at the rear. The former apply pressure to as much of the tunnel face as may be desired, while the jacks at the back bear against the arch ribs already in place. By reducing the pressure on the front jacks and increasing the pressure on those at the rear, the jumbo is made to inch forward on its rails. As the arch is excavated, a pair of Tugger hoists lifts rib sections on to the jumbo, where they are bolted together and jacked into position in the arch. Because of the instability of the ground around the east portal, ribs were placed one against the other, the spacing in the finished tube ranging up to 3 feet.

No heavy rock drills have been used up to date, clay diggers and Jackleg-mounted drills being relied upon in excavating from the large jumbo as well as in driving the foot-block drifts. It had been the contractor's intention upon completion of the first bore to take the jumbo apart and truck sections from the west back to the east portal, where they could be reassembled to drive the second and more southerly of the tunnels. But it was figured that considerable time could be saved by transporting the huge assembly intact on housemovers' dollies on the streets skirting the hill. That was accomplished without mishap on January 16 of this year.

The foot-block drifts are ventilated by a 50,000-cfm blower and a 30-inch duct with a Y-fitting from which 18-inch lines carry the air to both of the faces being driven simultaneously. For advancing the main tunnels, this blower is supplemented by two aircraft propellers, each operated by a 75-hp electric motor and exhausting at the east portal. The lining is placed with air-displacement Press Weld equipment, the forms being hydraulically controlled from a special jumbo. Concrete has been used extensively for backfilling because of its stabilizing effect and has been delivered in transit mixers by Pacific Coast Aggregates.

With space at a premium and the air demand fluctuating widely during different phases of the contract, Ingersoll-Rand XLE compressors were chosen as the principal source of air. Three of these compact machines were set up, and their combined output of 2550 cfm is conveyed to all points of the job by a 6-inch line. Two 105-cfm Mobil-Air portables supplied air for the sewer and street work, and double-drum slushers with a rope pull of 2000 pounds at 80 psi were used for a time to move mine cars in drifts. The contractor has provided a handyman service for residents on the hill, thus keeping an eye on settlement cracks, freeing sticking doors when necessary, etc.

Sherman P. Duckel is Director of Public Works for the City of San Francisco, Ralph G. Wadsworth is city engineer, and George Partridge serves on the project as resident engineer. L. L. Wheeler is project manager for Morrison-Knudsen Company, Harry Kirmond is assistant project manager, John Erdle is project engineer, Dan Butler is office manager, Carl Larsen is tunnel superintendent and Jim Miller is master mechanic.

SOURCES OF COMPRESSED AIR

Three Ingersoll-Rand Type XLE compressors (above) with a combined output of 2550 cfm supply power for operating rock drills, clay spades, paving breakers, concrete vibrators, hoists and mucking machines, there being more than 100 air-driven units. Each machine is driven by a General Electric 150-hp synchronous motor mounted on the side of the frame so as to reduce the foundation area required. Two I-R portable compressors of 105-cfm capacity are shown at the right. They are being used by the city in relocating a sewer line.

Glass is Coming of Age

New Uses Continually Being Found for One of Oldest Materials Made by Man

J. C. Pierce

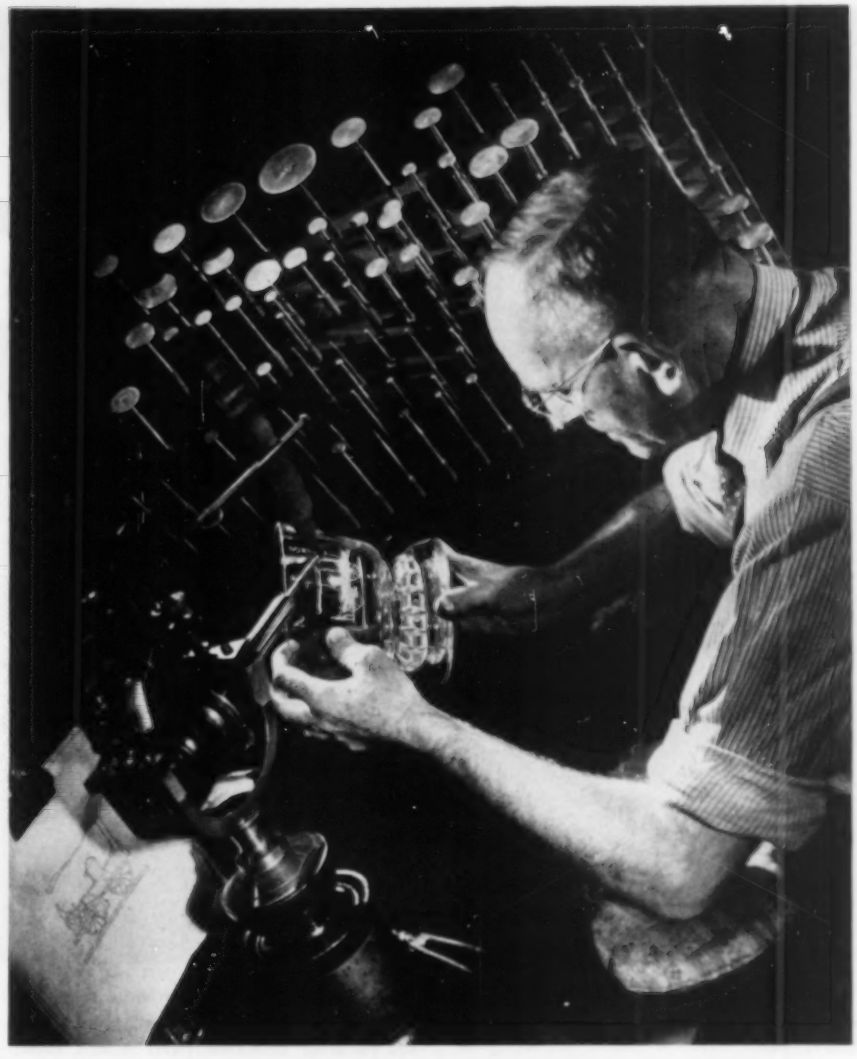

THE FINISHING TOUCH

With only a drawing as his guide, a master engraver reproduces an image on a Steuben glass bowl with his whirling copper wheel. Just a few hours before, this thing of beauty was an orange gob of molten glass on the end of a blowpipe in the expert hands of a "servitor" who rolled, blew and coaxed it into an object with some basic shape. Passed on to the "gaffer," master artisan in the shaping of fine glass, it was painstakingly transformed into this creation. Annealing and polishing prepared it for the engraver.

MORE has been done in the past 50 years to increase the usefulness of glass than was accomplished in the preceding 5000. That conclusion was reached after tracing the making of glass back to its roots in ancient Phoenicia and fifth-dynasty Egypt.

The recent spurt of technical achievement in the art is attributable, primarily, to necessity—the need for more special materials with which to bring about new miracles in science and industry. Through this stimulus, and the ingenuity and resourcefulness of the glassmaker, glass has become a highly adaptable tool—an engineering material indispensable to many industries. And those close to glass see in the present high plane of development man's appreciation of its potentialities that will lead it into yet undreamed fields.

Whereas glassmakers in the United States confined themselves in the first 300 years of their activity largely to the production of the general run of articles, they have in the past half century become world leaders in the discovery and manufacture of new products. What they have done and are continuing to do has attracted a great deal of attention and would seem to indicate that glass, long though it has been used, is only now beginning to come of age.

Symbolic of the American glass-making industry is the 100-year-old Corning Glass Works at Corning, N. Y. In celebration of its century of service to the nation, the company opened the Corning Glass Center on May 19, 1951, to commemorate the art of the past but, more especially, to serve as "a solid platform from which to launch an attack into the future." That significant statement was made at the time of the dedication ceremonies by Amory Houghton, Chairman of the Board, namesake

GLASS is a mysterious, fascinating substance. Man has been making, shaping and using it for 5000 years or longer; he has peered into its physical and chemical make-up with the finest of instruments and other technical probes; yet he can't define it in a concise, definite manner.

The scientist will tell you glass is a "super-cooled liquid," or a "liquid whose rigidity is great enough to enable it to be put to certain useful purposes." Although the ingredients of every glass mixture are accurately accounted for, the molecular structure of the resultant products remains a mystery, and we must reluctantly admit that we are not quite sure just what glass is.

GLASS CAN "TAKE IT"

Nowadays, glass can be made tough and strong enough to fill numerous structural and industrial applications. In fibrous form, it is the strongest of all materials, pound for pound. Fibers have supported stresses exceeding 1,000,000 psi, but because of surface strains accumulated in normal handling most forms of glass have an ultimate strength of about 10,000 psi. Combined with its electrical insulating property, this makes it extremely useful in electrical equipment, and many miles of fibers from Owens-Corning Fiberglas Corporation have gone into the coil insulation of generators. The man at the lower-right is suspended by a single tape of Fiberglas. So resistant to thermal shock is Vycor brand glass (96 percent silica) that it withstands simultaneous exposure to flame and ice water (right). Below, a piece of borosilicate-glass piping is being used to hammer a spike through an oak board.

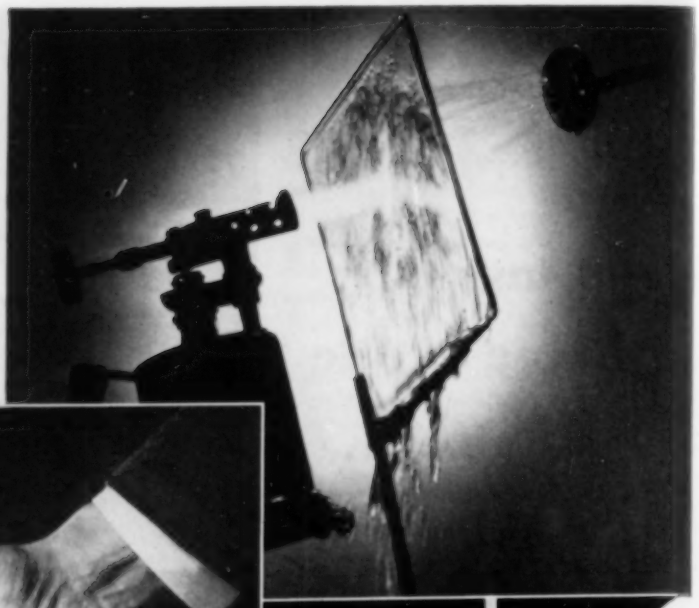

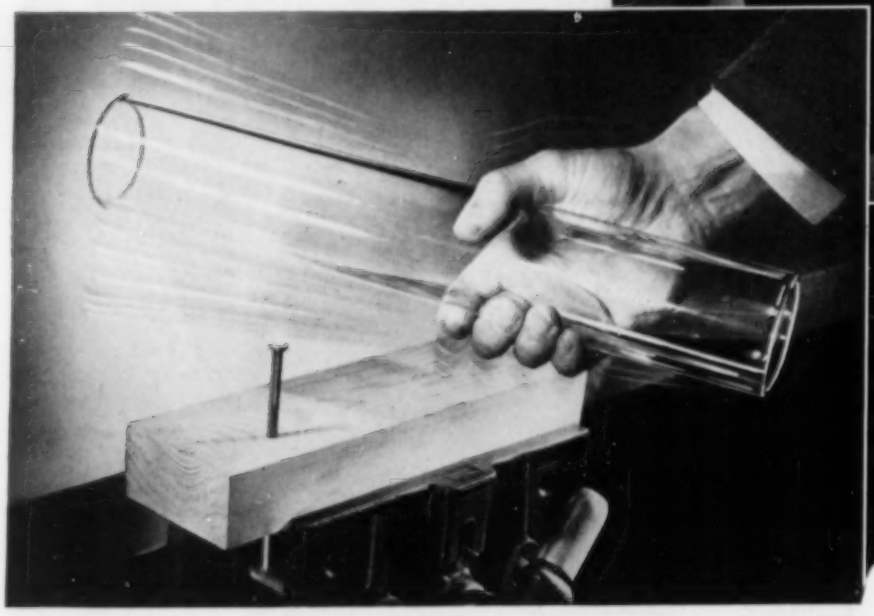

and great-grandson of the founder of the firm.

Corning Glass Center is an international exposition of glass—the fulfillment of the company's desire to bring together in one place the historical, scientific, industrial, artistic and sociological aspects of glassmaking to serve as an inspirational force to those that view it. One of the features of the Center is the Museum of Glass, which houses a representative collection of glass from earliest Egyptian days up through the ages to the present. It contains the world's most complete library on the art and history of glass, and in the Hall of Science and Industry are audio-visual means of demonstrating the physical properties of various products and of hand methods of making glass for scientific purposes. Also on display at the Center are today's diversified applications of glass and the basic techniques and formulae ever used in the industry. There, too, it is possible to see how Steuben glass, the finest crystal glass, is formed by hand. All this is provided for the culture, education and enjoyment of the public at large.

For the community of Corning itself, the Center includes a 1000-seat auditorium, a spacious lounge and a snack bar. These facilities, plus recreation rooms for reading, billiards, card games, bowling and basketball, are available to the employees of Corning Glass Works. For them it is a showcase plant where they can see their industry in full review—an enterprise of which they can be proud to be an integral part. For the glass industry it is a monument of achievement; for industry as a whole, a laboratory in human relations.

A walk through the Glass Center is a trip from the beginning of recorded history to the present day. One becomes aware that man has used glass always, although he relied entirely upon Nature's fusions prior to 3000 B. C. Sharp-edged obsidian, that natural glass extruded from volcanoes, gave the Stone Age glass tools, ornaments, weapons and even a medium of monetary exchange. As man progressed, he learned to chip and abrade obsidian into a variety of shapes to serve some of his needs and whims. Then he discovered how glass is formed. According to legend handed down to us in the writings of first-century historian Pliny, Phoenician sailors unwittingly produced glass when they fused sand and soda blocks upon which they heated food on a beach.

Paintings on the walls of Egyptian tombs depict glassmaking as far back as 3000 years before the Christian Era, and about 1200 B. C. the Egyptians developed an open-mold pressing technique. Probably around 100 B. C., at the height of the Roman Empire and long after the ancients learned to make glass and mold it into shape, it was discovered that hollow articles could be formed by blowing air through a crude blowpipe into a molten gob of glass. Although glass is still being blown into shape in that way, most hollow ware is now produced with puffs of air supplied by compressors.

Indeed, it would not be amiss to say

that air is one of the basic raw "materials" of the industry, ranking in importance with the mineral ingredients and the fuel used to melt the mix into a homogeneous mass. In addition to making hollow glassware, compressed air performs other functions in connection with the glass-blowing machines, and it is used extensively at varying pressures to cool men and machines where hot glass mixes are being worked, to open and close molds, to operate glass presses, to convey glass sand, and for numerous other purposes.

The degree of cultural attainment and the relative prosperity of an epoch long gone can often be closely gauged by its remains. Perhaps there is no better indicator of what has gone before, no better tell-tale, than glass relics passed down through the ages. At the museum in the Glass Center there is a magnificent glass display which tells the story of civilization: traces the spread of the art from the Egyptian to the Greek and Roman empires — depicts the Syrian and Venetian eras of intense glass culture — and portrays the Persian, French, German and English glassmaking practices. Clearly evident are the transitions from the ancient and medieval to the modern scientific, industrial and aesthetic aspects of the art.

The beginning of the modern age in glass is generally considered to date variously from the sixteenth or seventeenth century when the material first became a tool of science. Though spectacles, which were introduced in the mid-thirteenth century, are not in that category, they must be recognized as the door opening to scientific glassmaking. Spectacles came into being simultaneously in China and Italy, and optometry was still a young profession with a questionable future when the invention of the printing press (1454-55) brought a surge of business. The flood of new printed matter made people conscious of their eye deficiencies, and customers were not hard to fit. If nearsighted, they got a concave lens; if farsighted, a convex lens. If old, they were given a lens of strong magnification; if young, one of weak magnification. That was all there was to it.

It was the curved lens that brought about the microscope and telescope somewhere between 1590 and 1608, thus raising the status of glass from the bead and tumbler to the optical instrument. The thermometer, camera lens, and reflecting telescope followed in quick succession, and before the end of the seventeenth century Newton had resolved light into its constituent colors, which led to the creation of the spectroscope. These developments opened new vistas in the celestial dominion and the bacteriologist's laboratory.

Coincidentally, a new world was in the making across the Atlantic in America, and the settlers lost little time in building a glassmaking plant—their first authentic industry. It was established in Jamestown, Va., and some of the products from that "glass house" may have been the first made-in-America export items. But that plant, which went into production in 1608, was operated only intermittently by imported Dutch and Polish workers who turned out crude bottles and other articles most needed by the colonists. The enterprise did not flourish and was wiped out in the Indian massacre of 1622. However, the plant was soon replaced by another run by refugee Venetian glassworkers sent over from London specifically to make brightly colored beads with which the British could barter with the Indians for tracts of land.

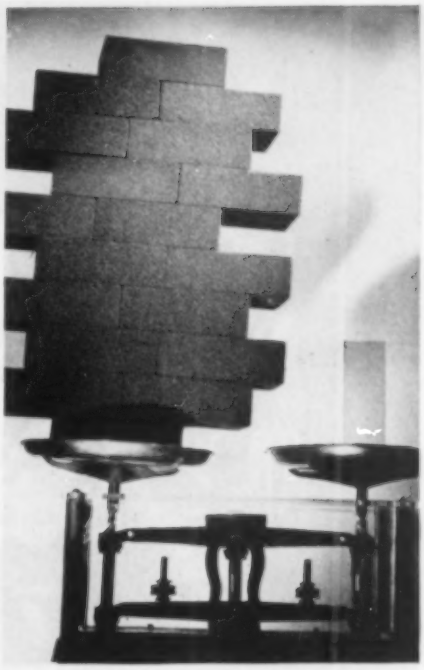

INSULATOR PAR EXCELLENCE

Eighteen Foamglas bricks (volume, 864 cubic inches; weight, 4.81 pounds) exactly balance a 24-cubic-inch block of optical glass. Foamglas is produced from powdered glass and finely divided carbon and is characterized by myriads of tiny gas-filled cells. In bulk, or made into bricks and blocks by use of a binder it is an excellent heat insulator. Among its advantages is its workability —it can be easily sawed.

History does not give enough credit to glass for being a factor in winning the eastern strip of America from the aborigines. Many a scalp was spared by the gift of a few shiny beads and the promise of more. Land valued today in the millions of dollars was granted to the colonists in exchange for small packets of glass objects. In 1641 a plant in Salem, Mass., started a more diversified line with the production of window panes, bowls, bottles, pitchers and lamps, again only what was in greatest demand. Four years later, with two furnaces being fired in its vicinity, New Amsterdam on Manhattan Island became the glass center of America.

Since nearly all the proprietors and workers were foreign born—English, Dutch, German, Bohemian, Polish, Venetian—American glassware of the seventeenth and eighteenth centuries plainly reflected the European influence in both design and method of manufacture. Noteworthy among those early glassmakers was German-born Caspar Wistar who, in 1739, imported some Belgians for his Salem County, New Jersey, establishment which thrived for the next 42 years. Any story of glassmaking in this country must include mention of artist-industrialist Henry

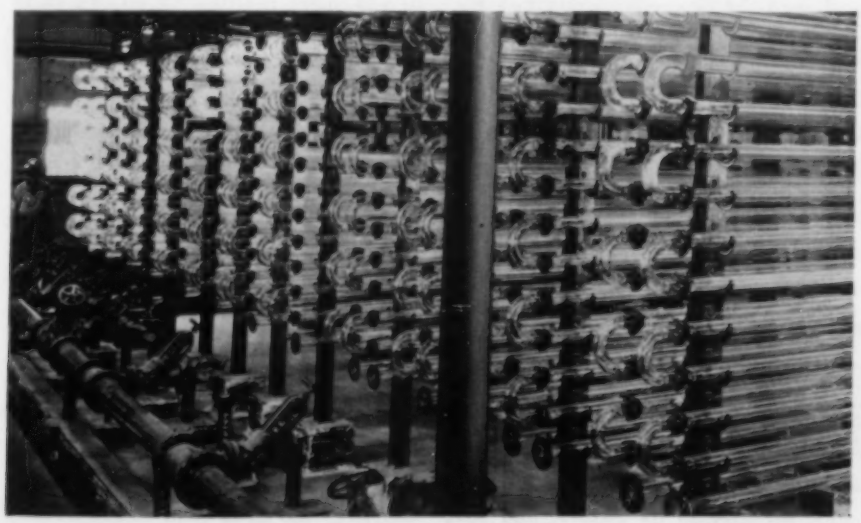

NOTHING HIDDEN

The use of industrial piping that "can't keep a secret" is growing fast. Improvement in chemical stability, choice of fittings, joining assemblies and field welding apparatus have increased its applicability. It comes in sizes up to 6 inches inside diameter. Glass pumps also are available.

William Stiegel who migrated from Germany in 1750 and gave America its first fine lead-flint glassware. The products of his furnaces are collector's items today.

GLASS AND AIR

There is hardly an operation in a glassmaking plant that does not use air compressed by lung or machine. The freehand glass blower still plays an important role in the art, although the mechanical compressor is responsible for placing hundreds of useful glass articles in the poorest of homes. If your automobile had run as many hours as has the unit shown and had averaged 30 miles per hour, it would have traveled about 8,000,000 miles. For about 89 percent of the time since June, 1917, this Ingersoll-Rand steam-driven, 350-hp machine has been compressing air for some of Corning's operations. It is one of dozens of I-R units serving the company's plants.

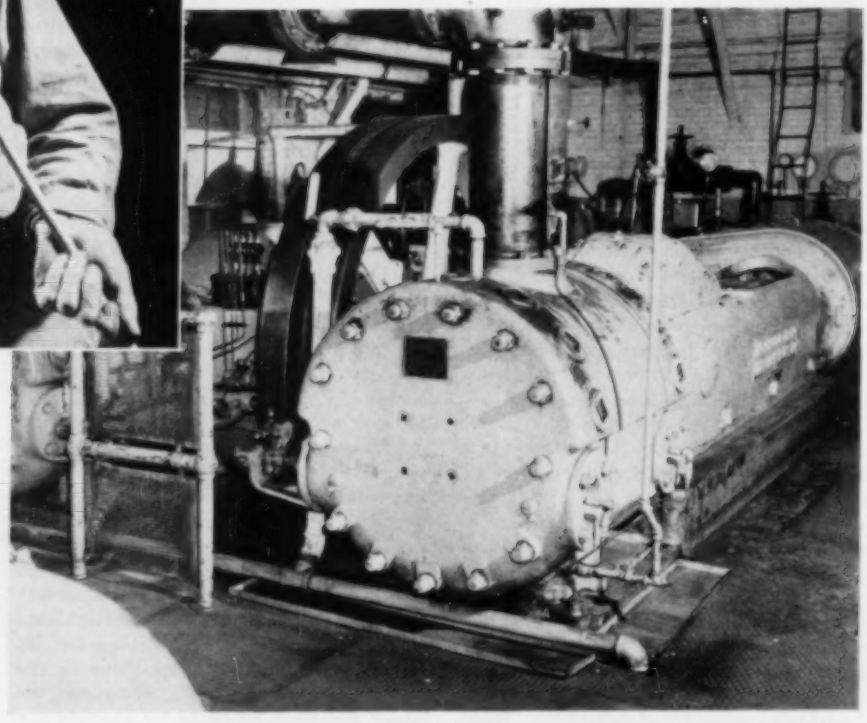

The decline of the Renaissance towards the close of the eighteenth century (the era in which creative art in almost every phase reached a pinnacle) and the beginning of the industrial revolution caught the glassmaking industry in its sweep. Although automatic machines for shaping glass did not appear until 1899, when Michael J. Owens invented a bottle blower which led to production-line methods, machines accessory to time-honored glass-blowing equipment made their debut in the early 1800's.

Into this picture stepped Deming Jarves and his New England Glass Company established in Cambridge, Mass., in 1815. Jarves improved upon a crude pressing machine invented by Enoch Robinson, a worker in his factory, with the result that pressed ware became available to a large and growing public. That concern, and the 1825 Boston & Sandwich Company of which Jarves became part owner, were America's first large-volume producers and flourished for more than 50 years. Subsequently, when the artisans in the glassmaking field turned to stone and paint, there was a lag in creative artwork, which has been revived in the past five decades through the efforts of such well-known American firms as Libbey, Fostoria, Viking, Cambridge, Imperial, Heisey, Duncan & Miller, Tiffany and Steuben.

Amory Houghton, Sr., conducted a successful wharf business in East Cambridge, Mass. A man of vision, he sold out and started the Union Glass Company in 1851 at Somerville, Mass. There he produced fine cut glass for thirteen years. In 1864 he disposed of that plant and used the proceeds to purchase the Brooklyn Flint Glass Company. Then, in 1868, he chose Corning, N. Y., as the site for what was to become the Corning Glass Works. From that modest beginning has grown a network of fourteen factories in six states and Canada employing directly some 13,000 persons. To manufacture and distribute products not in the regular Corning line, the company has established affiliate organizations such as the Pittsburgh Corning Corporation which makes building blocks and Foamglas, the Owens-Corning Fiberglas Corporation which turns out insulating material and the Dow Corning Corporation which supplies many silicone products.

"Corning Means Research in Glass." That was the slogan the organization adopted early in its history, and that has been its guide through the years. From cut and blown tableware, lantern globes, lenses, thermometer tubing and cane (slender cylindrical rods) made in its first small plant has grown a list of items numbering more than 37,000. There was a period when the manufacture of tableware was dropped in order to add to the facilities for making more practical commercial articles, and at that time the production of scientific glassware became an important part of the company's activities. Perhaps its first outstanding accomplishment in this department was the blowing of bulb blanks for Thomas Edison's incandescent lamp in 1879.

Early in its history, the Corning Glass Works recognized the importance of improving and standardizing railroad signal glass and has specialized in this field. Heat-resistant glass, hollow glass building blocks, Foamglas, fiber-glass products, the 200-inch Mt. Palomar reflector disk, photosensitive glass and television tubes also are among Corning's triumphs. And research under a staff of some 250 experts is continually adding new formulae to the more than 50,000 already on file at Corning. Of Nature's 98 known elements 84 are used in its glass mixes to meet the manifold requirements.

Contrary to what might have been expected, the coming of mass-produc-

tion through the advent of automatic glassmaking machines increased employment in the factories. The resultant reduction in operating costs meant lower prices to customers, and the public responded. More workers were needed in all departments to turn out the greatly expanded volume of goods. And, unique among industries, the machine did not entirely replace arduous hand methods, for a large section of one plant at Corning is still given over to free-hand blowing and open-mold hand pressing of industrial ware. In the Glass Center one is able to see Steuben craftsmen creating by hand forms that machines cannot fashion. Perhaps it is this fact that is partly responsible for the great attention Corning pays to human relations—for its recognition that the people it employs are its most important resource and that machines are made to serve not replace man.

The glassmaker who shapes articles of usefulness and beauty from drab sand, lime and soda ash has always been regarded with respect and often with awe. The Venetian republic of the sixteenth century grew in wealth and prestige because of her glassmakers, who contributed so much to her economy that the industry was put under absolute government control. Thousands worked behind iron bars so that trade secrets would not be divulged to other countries, but they enjoyed a station in life akin to that of nobility so long as they obeyed the rules. If they were caught attempting to escape to foreign soil, they were put to death.

The artisans in American glass plants today are, in the main, descendents of the craftsmen who came from Venice and elsewhere in Europe. The older sections of the Corning Works might have been taken out of the pages of a sixteenth-century book. There the men still use the techniques and tools of their forebears—blowing irons, forming blocks and paddles of wood, and hand shears—to make specialty products that have defied mechanical methods or have not justified installing machines because the demand for them is small. At one point, two huge, circular 16-pot furnaces furnish free-hand blowers with cherry-red to white-hot glasses for a host of purposes. These furnaces are surrounded by gatherers, ball holders, gaffers, mold boys and others busy making infrared-light bulbs and thermometer-tubing glass, pressing out signal-light reflectors and fashioning a long list of other things.

Articles in previous issues of this publication have touched on phases of the Corning Glass Works' activities, but it would take a book to deal comprehensively with all its ramifications. New glass products—surprising industrial and scientific contributions—make headlines as they emerge from the test tube and laboratory furnace and are put on production lines. All these achievements, whether attributable to Corning or other of the more than 200 glass plants in the United States, are recorded at the Glass Center. Space limitations permit the inclusion here of only a few of the industry's outstanding advances.

With regard to optical glass, it is said that America did not win her independence from Europe until 1945. That year, which marked the world's first mass output of glass of that type, Corning scientists brought to the commercial stage a continuous process of making lenses. That procedure, which replaced the standard batch method, stemmed from research stimulated by the Government's call for a stepped-up production of lenses for instruments of war. It has made it possible for the first time to form optical and ophthalmic glass blanks to the approximate size and shape of the finished product, thus eliminating reheating, molding and arduous grinding of pieces cut from large sheets of glass. Continuing its research in this field, the company next compounded glass for bifocal lenses free from the imperfections that were thought to be inherent in glass of this kind. The high

MUSEUM OF GLASS

The Corning Glass Center tells the story of glass from the beginning. Lighting of the cases in its corridors ranges from black to skybright to help bring out the finer qualities of the ware displayed. A few of the museum's rarest specimens are pictured at the right. The book—"L'Arte Vitraria" by Antonio Neri of Florence (1612)—is the first known publication devoted entirely to glassmaking. On it are an amphora and beads that were made in Egypt about 1500 B. C. One of two goblets remaining from the work of England's great craftsman George Ravenscroft is at the left. The dragon-stem goblet is a sixteenth-century Venetian masterpiece.

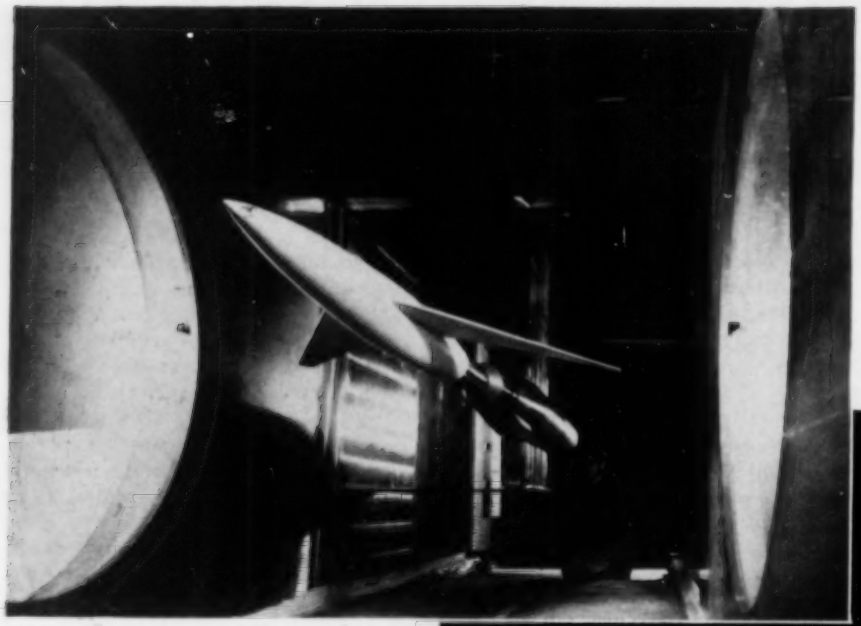

WINDOWS FOR SUPERSONIC TEST TUNNELS

The knowledge and experience gained in casting the mirror for the Mt. Palomar telescope gave Corning a good start in the field of optical glass, one phase of which is the making of windows for wind-tunnel chambers in which models of aircraft are tested in streams of air having twice the velocity of sound. The picture below shows one of the disks being examined for blemishes.

quality of modern optical glass is demonstrated in the Glass Center, where one can read a small printed card through a bar 11 feet long.

The casting of the 200-inch mirror for California's Mt. Palomar Observatory in 1934 made history. The experience gained in making that reflector, which remains the largest mass of glass ever cast, has proved to be of great aid to aeronautics. Corning now casts 1-ton windows for supersonic wind tunnels that enable scientists to study the performances of model aircraft subjected to wind velocities in the 1500-mile-an-hour range under varying conditions. In these giant lenses no flaws are tolerated that would distort photographic records of shock-wave and air-flow patterns. They are 6 inches thick to withstand the forces to which they are exposed and 52 inches in diameter to afford a full view of the object within.

Strange as it may seem, glass is quite flexible and elastic up to the point of fracture, and for the entertainment and enlightenment of visitors, these properties are demonstrated at a booth in the Glass Center. There, by pushing a button, a coiled spring is flexed mechanically within considerable displacement limits. As a matter of fact, such a spring has actually been flexed 449,000,000 times at Corning without showing signs of fatigue. This and other qualities have resulted in a special mixture and a refined process by which the company is producing great quantities of glass ribbon. The strips can be rolled and sharply twisted, and the material possesses insulating and dielectric properties equalling those of high-grade mica. In combination with foil it is being fused into superior electrical capacitors.

The mass manufacture of television tube blanks could not have been accomplished without a combination of developments. Each blank is made up of two pressed-glass sections, a pie-plate-shaped face and a funnel-shaped back which are welded together. It was no small undertaking to devise the electrical apparatus with which to weld the parts into vacuumtight bulbs that would meet the rigid specifications of manufacturers of TV sets. The method in use is based on the principle that glass will conduct electricity at high temperatures. The edges to be bonded are preheated by gas flames until they are softened; then they are brought together and a high-frequency electric current is shot at them through the flames. The result is a homogeneous joint, formed at about 2000°F without distortion and without imparting stresses to any part of the bulb, which is as strong as the glass itself. Displays at the Center show that this means of welding permits the fabrication of glass shapes never before thought possible.

Conveying foods, drugs and corrosive industrial fluids by glass piping is not new, but in consequence of recent improvements in manufacture such lines are now being used for purposes for which they were considered unsuitable heretofore. The chemical stability of the glass that goes into pipe and fittings has been increased measurably and prevents it from contaminating foods and drugs and makes it resistant to nearly every corrosive industrial liquid and gas. The glass is likewise unusually resistant to mechanical shock, as was demonstrated when a spike was driven through oak with the heat-strengthened end of a pipe joint. Being a borosilicate glass, it has a low coefficient of expansion and therefore withstands thermal shock brought on by sharp temperature changes either of the fluid carried or from without. And in giving the material these engineering advantages none of its former properties have been lost or impaired. Unchanged is the capacity of glass piping to resist temperatures up to 250°F under normal conditions and a maximum of 450° when protected against thermal shock. It still offers continual visual inspection of the contained liquid because of its transparency and has the smooth internal walls that minimize the deposition of scale and other matter.

In 1947, Corning discovered photosensitive glass in which 3-dimensional pictures of a loved one, a prize catch or a favorite scene can be permanently ingrained. This is done by adding very small amounts of metallic compounds and sensitizers to ordinary colorless transparent glass. The resultant product is clear and sensitive to ultraviolet rays which, upon passing through a photographic negative in contact with the glass, set a latent image in and through the latter. When the glass is subjected to a temperature of about 1050°F, the submicroscopic metal particles precipitate out of solution and the image becomes visible. Ingredients can be put in the mix for colored pictures.

Further research in photosensitive glass followed, and in 1949 was produced an opal glass that is made and developed in much the same manner as the transparent glass just described. However, upon heating, the contained metal particles act as centers for the growth of opal crystals that are essentially nonmetallic, and the final design on or in the screen or negative is reproduced in the form of milky colored crystals. A wide variety of patterns can thus be grown through the glass, but the one most popular at present has clear squares or bands bounded by layers of opal crystals at prescribed angles and spacings. It is usually manufactured in sheets and used for fluorescent lamps. Light rays passing straight through the clear areas travel virtually unimpeded to the work surface, whereas those striking the layers of opal crystals are diffused and eliminate glare.

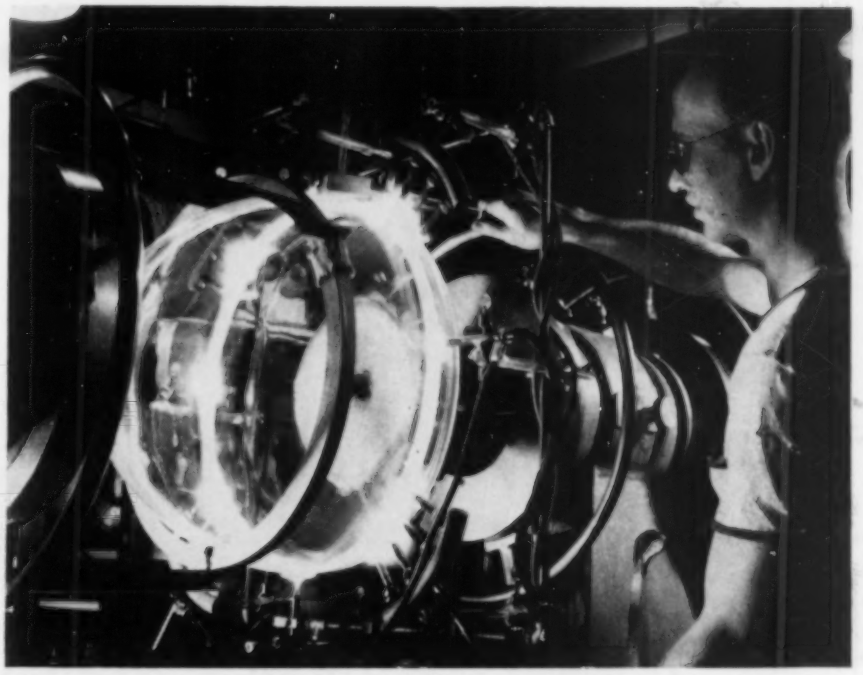

WELDING GLASS ELECTRICALLY

The white-hot band on the TV tube in the lathe represents the edges of its two sections as they are welded into a vacuumtight joint by electric apparatus. This development led to the mass production of these tubes, which would otherwise have had to be made by arduous, slow and expensive hand methods. Another outstanding application of this technique was the welding of 7½ miles of Pyrex glass piping in the atomic-energy plant at Oak Ridge, Tenn., by the Stone & Webster Engineering Corporation. Field fabrication of glass piping was new at that time and could not have been accomplished without the equipment and technical know-how furnished by the Corning Glass Works.

FIRING A POT

This picture was taken just when an optical reading was being taken of the temperature of one of the pots of a 16-pot furnace at Corning's B factory, which is still given over to freehand blowing. When a pot is nearly empty it is replaced by another containing an exactly proportioned mixture which is brought up to the working temperature specified for that particular formula and its application. That is normally done on the night shift. During the two other shifts the area is given over to the freehand blowers. Above the pot openings are ducts that deliver cool air from nearby blowers for the comfort of the workers. Between the pots are pipe lines that carry air at higher pressures to open and close molds and presses, to feed jets by which tools and glass objects are cooled, and for other purposes.

But that is not the end of the story of photosensitive glass. Last year Corning announced a special opal glass in which intricate designs can be etched with machinelike accuracy. In this case the glass is immersed in hydrofluoric acid after exposure to ultraviolet rays and heat for the growth of opal crystals. The photographic, milky opal-crystal image is about 50 times more soluble in the dilute hydrofluoric acid than are the colorless transparent areas of the glass so that square, round or hexagonal openings as small as 0.004 inch in cross section can be etched to various depths in as well as through the glass.

All these developments disprove the age-old theory that glass has physical limitations which disqualify it for other than the long-familiar applications. Today it is also an engineering material for which industrial designers have many uses because it combines durability, permanent finish and transparency or opalescence with indifference to heat, electrical stability and chemical inertness. These and other properties have been imparted to it largely by the Corning Glass Works through its years of experience and research and manufacturing facilities.

Moving a Mine 150 Miles

Canadian Producer, Sherritt-Gordon, Is Shifting Its Operations Northward at a Cost of $45,000,000

C. H. Vivian

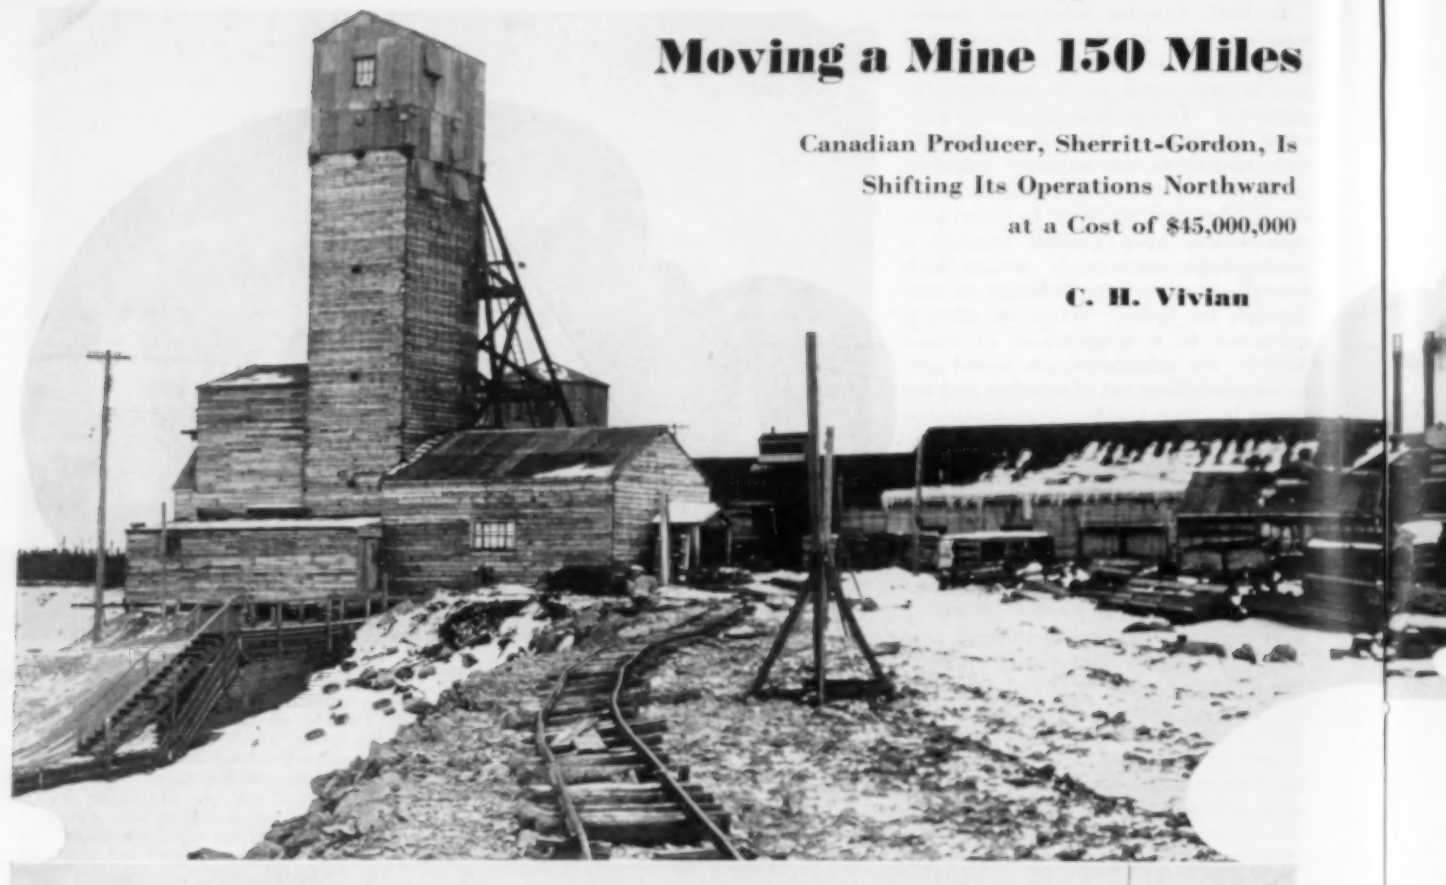

A CANADIAN mining company is in the midst of a $45,000,000 moving day. Sherritt-Gordon Mines Ltd., having worked out a copper-zinc-gold-silver deposit at Sherridon, Manit., is shifting its activities 150 miles northward to Lynn Lake in the same province and opening up nickel-copper ores in virgin mining territory. The term "moving day" is used figuratively, because a transfer job of such a magnitude can no more be completed in a day than could the building of Rome. It was, in fact, begun several years ago, and will not be finished until 1953.

It is unusual if not unique for a concern of Sherritt-Gordon's size to pick up its belongings lock, stock and barrel and set them down elsewhere. It is certainly unprecedented in Canada, which is still too young as a mining nation to have worked out many large showings of ore. Some of its mining companies have abandoned properties and acquired others, but the distinguishing feature in this instance is that Sherritt-Gordon is moving its physical plant and equipment, its employees and their families, and most of the buildings in Sherridon. It is a wholesale hegira.

Never was a corporate shift made with more trouble and expense. In the beginning there was not even a road to follow, and men and supplies went in by air. Since then heavy hauling has been done in winter over a roadway that is impassable except when freezing temperatures hard-surface the miry muskeg. Overland shipments in the winter of 1950-51 totaled 9000 tons, and are expected to reach 11,000 tons this winter. A part of the moving bill will be a $15,000,000 item for extending the Canadian National Railways to Lynn Lake, a job that will not be completed until

CANADIAN NATIONAL RAILWAYS PHOTOS

LYNN LAKE TODAY

Like most frontier settlements, Lynn Lake is starting life a bit on the shabby side. Because all materials have to be flown in or hauled over the frozen muskeg, builders can't be choosy and have used whatever they could lay their hands on. After the rails reach the camp it will spruce up. Pictured at the top-left is the temporary headframe at A Shaft, which was sunk to open up mineral deposits and also to provide ore for a 3-year research program that was begun in 1949 and has developed a leaching process for extracting nickel and cobalt from concentrates. The other views show the town's "business" and "residential" sections.

late 1953, by which time the new mine is scheduled to be in full operation. The carrier will, consequently, be of no help to the movers, although it will be indispensable in the future for hauling in supplies and bringing out the metallic harvest for which all this effort is being expended.

Sherritt-Gordon closed down the Sherridon Mine last September 16. For several years previously its end had been foredoomed. Diamond drilling had failed to locate additional ore bodies, and preparations were made to extract all recoverable ore and then quit. This was done in an orderly fashion, and equipment that could be put to further use or sold was brought above ground, starting at the lowest level and gradually working upward. The terminating activities had been planned so well that the mine worked right up to capacity and at a profit to the last. The final "clean up" was the removal of a huge pillar of ore that had been left in place to support buildings above it. The decision to mine it prolonged the life of the property by about three months.

Looking forward to the day when the ore shoots at Sherridon would give out, the company began a systematic search for other deposits about 1937. Geologists and prospectors combed the section to the north, but failed to find anything of a promising nature until late in 1945. In December of that year Austin McVeigh, a veteran prospector who had previously discovered what is now the Madsen gold mine at Red Lake, Ontario, found a showing of mineral where geophysicists employing a magnetometer had located several anomalies. An anomaly is an area where the magnetic pull of the earth deviates from the normal. Where the pull is above normal heavy material is indicated, and it is a likely place to look for mineralization.

The only outcropping McVeigh could find was an area of dioritic rock about the size of a tablecloth, which rose like an island in the midst of a sea of glacial drift up to 40 or 50 feet in thickness. The rock in place was lean in mineral, but some detached pieces of float resting nearby were richer. On the strength of this showing, Sherritt-Gordon flew in a diamond drill and crew and went to work. The first two holes produced cores having a nickel content on a par with the ore at the great Sudbury deposits of The International Nickel Company but were lower in copper.

The discovery set in motion a huge program of exploration to test the surrounding country. The company announced the find during the final days of the year, but withheld the exact location until it could stake additional claims. An effort was made to send in a second drilling rig and crew, but bad flying weather thwarted that. Meanwhile, with the air freight rate at fifteen cents a pound, work was begun on improving a fishermen's road from Sherridon so that equipment and supplies might be moved in overland on tractor-drawn sleds. The route was opened for travel on February 14, 1946.

Among the first men to make the trip were wood choppers to provide fuel for the drillers who had had to stop work because a small stream from which they were obtaining their water had frozen

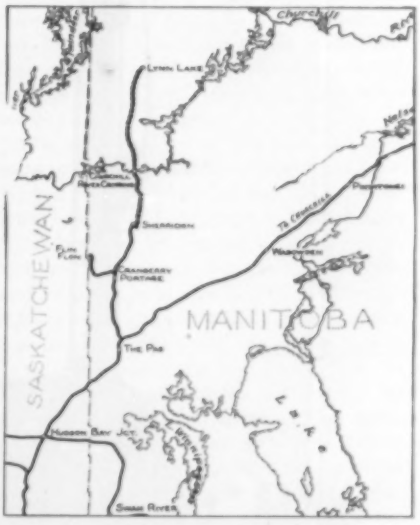

LOCATION MAP

The heavy black lines represent the routes of the Canadian National Railways. The 155-mile link being built from Sherridon to Lynn Lake is indicated by a broken line.

solid. Within a short time four drills were operating from the ice-covered lake, it having been decided to explore the underwater sections in winter and leave the land areas until thaw. In preparation for future activities, a complete set of camp buildings and sufficient supplies for four or five months were hauled in before the winter breakup. Spring came early that year, and by the middle of May there was enough open water for planes to land and take off. This permitted bringing out the accumulation of cores from the drills so that some sort of an appraisal of the value of the deposits might be made.

The results proved so favorable that Sherritt-Gordon officials began thinking in terms of a big new mine. Drilling continued—many thousand feet of it with seven rigs—until it was pretty well known where there was ore and where there wasn't. To the end of 1947, it totaled 160,000 linear feet. Even then drilling didn't stop, and it is still going on both to permit making a close estimate of the extent and grade of the deposits and to obtain geological data that will be helpful in mining.

The cored samples of the underground formations show that there are at least six commercial ore bodies, apparently in the form of lenses, containing fourteen million tons of ore worth around $280,000,000 at prevailing market prices. Little exploration has been done below a depth of 1000 feet, and there may be other mineral concentrations at lower horizons or elsewhere on the company's holdings.

Five of the lenses, designated by the letters A, B, C, E, and Z, are grouped fairly close together and can be mined from one shaft. A sixth, called the El, is several hundred feet away. Preparations to start production by the time the railroad gets through are going ahead steadily. A 1000-foot shaft to give access to all the ore bodies but the El was completed in the summer of 1949, and since that time several levels have been opened and other development work done. A steel headframe for a shaft at the El deposit was hauled in during the winter of 1950-51.

It is planned to mine only the A and El ore bodies during the first five years, taking about 1500 tons a day from the A and 500 tons from the El. The underground is being laid out for inexpensive mining, something for which Sherritt-Gordon acquired a reputation during its former operations. Ore will be dropped by gravity to the 1000 level, crushed and conveyed by belt to the shaft for hoisting. There will be no tramming.

Research for the purpose of developing a suitable metallurgical process for reducing the nickel ore was initiated in 1949. Since the summer of that year a pilot mill at Lynn Lake has been producing concentrate for these investigations, and many tons of it have been flown to Ottawa where a staff of 45 chemists and metallurgists has been working. Two concentrates will be made in a selective flotation plant at the mine: one containing copper and the other nickel and cobalt. The former will be sent to the smelter of the Hudson Bay Mining & Smelting Company at Flin Flon, 45 miles southwest of Sherridon. The nickel-cobalt concentrate will go to a new leaching plant that will use a combination acid process originated by Dr. Frank Forward of the University of British Columbia and an ammonia process worked out by Sherritt-Gordon technicians. This treatment is designed to accomplish the same result that is obtained by The International Nickel Company with a smelter and refinery at Sudbury. The leaching works will be located somewhere in Alberta, where there is natural gas for fuel. It also must have access to large supplies of water. It is estimated that the plant will cost $17,500,000, most of which will be spent on machinery and equipment.

Fortunately, the ore-concentration process will differ but slightly from that practiced at Sherridon, and the existing

CANADIAN NATIONAL RAILWAYS PHOTOS

BREAKING GROUND FOR RAILWAY

Right—Standing beside the car that brought them to the end of steel at Sherridon, President Donald Gordon (second from left) and other officials of the Canadian National look toward the Quarrymaster drill on the horizon that is breaking ground for the $15,000,000 extension to Lynn Lake. Behind the group is the first stake marking the route of the new line. The other picture shows the party inspecting the Quarrymaster at close range. Three of these large deep-hole drilling units are being used by the contractor, C. A. Pitts Ltd., of Montreal.

PHASES OF CONSTRUCTION

The railroad builders attack their job on the ground and in the air. While a bulldozer strips brush and trees from the 100-foot right-of-way, linemen string wires on poles to carry current needed for electrically operated equipment.

CANADIAN NATIONAL RAILWAYS PHOTOS

mill will be used with only minor modifications. It has a capacity of 2000 tons of ore daily, and initial mine production will consequently be set at that figure. On that basis the annual output is estimated at 840 tons of nickel, 3414 tons of copper, and 100 tons of cobalt. The nickel and cobalt will be separated by the leaching process, which will also yield 72,000 tons of ammonium sulphate a year as a by-product. At present prices, the annual return from all products will approximate $14,000,000, of which about half is expected to be profit. The United States has contracted to take most of the nickel and all the copper and cobalt for five years.

In below-zero weather, Lynn Lake workers are now excavating and pouring concrete for building foundations. By spring, substructures will be ready for most of the permanent shops and treatment plants around both the A and the E! shafts. The job of dismantling and reassembling these facilities is in the hands of Dominion Bridge Company Ltd., but moving is done by the mining company. A good share of Sherridon's houses have been freighted to their new sites, and even a church is earmarked for the trip. However, with the beginning of railroad construction and the establishment of the contractor's headquarters in Sherridon, workers and their families have been pouring into the town and occupying homes. The job of relocating some of the latter will consequently be postponed for a year or so.

Speaking of houses, a distinctive type suitable for dwelling or general utility purposes has played a big part in the Lynn Lake development. It is called the "12x28," from its floor dimensions. When Sherritt-Gordon was scratching around near Sherridon for new ore, it housed its prospectors in tents, small shacks, or whatever else was available. When the supply of these ran out, someone decided to design a structure that would serve as a home, bunkhouse or cookhouse and still be small enough to haul over bush roads. The result was the 12x28, which became popular and plentiful. When need arose for accommodations and offices at Lynn Lake, these warm, well-built, $350, 4½-ton wooden structures were the answer. In one winter 22 were constructed at Sherridon and freighted over the snow to the new camp. A family headed for Lynn Lake moved its furniture into one of the houses and sent it off. Three days later the people flew up and found the home awaiting them ready for occupancy. It had made the trip without anything in it being broken or seriously disarranged.

The town site at Lynn Lake has been cleared of brush and other growth and a road connects the A and El shaft areas. The camp will rise on sandy ground that slopes from the lake to a point 150 feet above the water. Farther back are rolling hills with light stands of spruce and jack pine. The longitude of the town is 101°, almost due north of Wichita, Kans. It is about 10 miles south of the fifty-seventh parallel, approximately in line with Juneau, Alaska, and the southern tip of Greenland. It is far enough north for the permafrost to extend down 100 feet or more in the 1000-foot A Shaft. Air sent down to ventilate the mine will have to be heated.

By official action, Manitoba has set up the local government district of Lynn Lake, with an area of 400 square miles. It will be administered by C. R. Neely, a former banker who has managed Sherridon for the mining company since 1937. Prior to that time he was mayor for six years of the Manitoba city of The Pas.

While the diversified activities at Lynn Lake are underway, a hydroelectric plant is being built 40 miles away on the Laurie River. A dam and powerhouse have been substantially completed, and the turbines, generators and other equipment are being hauled in this winter. The station will have an initial capacity of 7000 hp, and there is a second site that can be utilized if the need for more energy arises. The route for a transmission line to Lynn Lake is being cleared. The sinking of the El Shaft is awaiting the arrival of power, as the hoist is electrically operated.

The construction of the railroad presents problems similar to those that confronted the builders of the transcontinental lines 60 years ago. The section to be crossed is typical bush country, with no roads and few trails. It is a land of moss and muskeg underlain by granite and gneiss, which occasionally rise above the general level. In places there are dense growths of spruce. Almost everywhere there is water in sloughs, streams, and lakes, and in summer one needs an airplane or a canoe to go very far. For these reasons most of the construction equipment and materials must be transported in winter when the ground is firm.

There is a saying in the North that it takes a peculiar kind of engineering talent to lay out a railway in such terrain. With experience, men acquire a

sort of sixth sense that tells them to run the line here and not there. By exercising this innate judgment, they build a stable roadbed that avoids the numerous pitfalls and yet maintains such a nice balance between cut and fill as to keep costs within reason. A stretch of road like the one in question has not been constructed since the early 1930's, when the line with which it will connect was pushed across the barrens of Manitoba to Churchill, up on Hudson Bay. Significantly, Maj. J. L. Charles, who located the final 154 miles of that link, as well as hundreds of miles of other stretches on the western prairies, is now chief engineer for the Canadian National in western Canada, and it fell to his lot to direct the Sherridon-Lynn Lake surveys.

As far back as 1946, the Canadian National was aware that a new mine was perhaps in the making at Lynn Lake, and a general reconnaissance of the area was ordered. It showed that there were three possible rail routes: it could take off from the line to Churchill at a point east of Lynn Lake, or run in a general northerly direction from either Flin Flon or Sherridon. The Canadian National, of course, wanted to follow the route along which the most freight was likely to develop in the future. That is naturally a hard thing to determine in a territory that is virtually unexplored.

In 1950 the management of the railway decided to build the extension, and in January, 1951, instructed Mr. Charles to lay out the right-of-way in detail. Because of the preparatory work, it took only two weeks to select Sherridon as its starting point. On February 16 parties set out from that place to make preliminary surveys. When the spring break-up came they were stalled for a while, but as soon as the ice went out two groups of twenty men each were in the field again. The line was tentatively laid out by August and definitely located by October 10, after 236 days of elapsed time. The results of the field work were transferred to paper in the form of a map on a scale of 200 feet to the inch showing the topography along the route with contour lines representing 5-foot intervals. An accompanying annotated profile gave running particulars regarding the terrain such as "wet muskeg," "dense growth of 30-inch spruce," "solid rock," etc.

Twenty-seven contractors applied for copies of the plans and specifications, but after looking them over only five examined the territory to be traversed and only three submitted bids. The contract was awarded last August to C. A. Pitts Ltd., of Montreal. Clearing the right-of-way to a width of 100 feet was started immediately with bulldozers that strip off the brush and trees faster than the pioneer construction men would have believed possible.

Rock drilling began on September 29. For this work there is being used for the first time on any railroad job the new Ingersoll-Rand Quarrymaster drill that can put down a 5½-inch hole to a depth of as much as 70 feet. This heavy-duty machine is no stranger to the Pitts organization, because it bought and used three of the units while excavating for the Des Joachims power plant on the Ottawa River in 1950. Subsequently, it sold one of the drills and is utilizing the two others on another contract. In order to avail itself of the effectiveness of the Quarrymaster on railroad construction, the firm has rented three of them.

The difficulties experienced by the surveyors will be met in a much larger measure by the contractor, especially since he is being called upon to complete in two years a job that would normally take three. To accomplish this, he will have to adhere closely to a rigid schedule. It calls for the building of the first 56 miles to the Churchill River by the spring of 1953. The waterway must be bridged before work can be started on the final 99-mile leg from there to Lynn Lake.

To avoid a long and expensive bridge, the Churchill will be crossed at a point where it divides into three streams. This will require three steel spans with lengths of 201, 155, and 200 feet, respectively. In most places it would be possible to bridge the river at any season, but not there, because one of the spans goes over Pukatawagan Falls. Spray from the open water would freeze inches thick on the girders in winter.

As soon as the freeze-up came last fall, tractor trains began hauling supplies and equipment for camps and construction, spotting them along the line at locations where they would be needed later. Included were steel and cement for at least one of the Churchill bridges. Piles for many timber spans will have to be driven this winter, and that calls for thawing the ground with steam wherever a pile goes down. Among the materials required to complete the job will be 1½ million cubic yards of crushed rock and 700,000 cubic yards of gravel for roadbed and ballast. These are minimum figures that may have to be increased if the muskegs prove to be deeper than they are thought to be. It is not known how much usable rock will be found at accessible places along the route, and it is intended at present to ship in most of it and probably all the gravel. Although there is timber in the country to be traversed, it is not considered acceptable for ties, and 450,000 of these crosspieces will be shipped in.

The timetable calls for the completion of 15 miles of grade by early next summer and then laying rails steadily until the Churchill River is reached in the fall. With the bridges erected, the work will be pushed on, and tracklaying is scheduled to be finished by October 31, 1953. Some ballasting will still remain to be done, and the railroad will not be turned over to the dispatcher until early in 1954.

Up to last June the transfer of Sherritt-Gordon's operations had cost around

INSPECTION PARTY

For this pose the Canadian National Railways group, shown on a preceding page, turned around. From the left they are: J. R. McMillan, vice-president, western region; President Gordon; Maj. J. L. Charles, regional chief engineer; B. L. Daly, a director; and S. F. Dingle, vice-president of operation.

CANADIAN NATIONAL FILM BOARD PHOTOS

LAND OF FURS, FISH AND MUSKEG

Muskrats formerly abounded in Manitoba but were almost extinct by 1930. To restore the fur industry the government created dams and swamps, and by 1940 trapping was good again. Pictured at the lower-left are a trapper's wife and daughter perched on one of the sleds of a tractor train about to leave The Pas for the grounds to the north. At the upper-left, John Lucas, driver of one of the tractors, holds up a muskrat. A pelt is cut into four pieces: the back for best quality, sides for seconds, and the belly for low grade. Most of the fur is marketed in Winnipeg. Each winter 6000 men fishing through the ice on 40 Manitoba lakes catch more than 30 million pounds of fish worth in excess of $4,500,000. Ninety percent of the catch is sold in the United States, mainly in Chicago and New York. The view at the right shows fishermen hauling a net from a hole in the ice.

$7,000,000, all of which the company paid out of accumulated earnings. Later in the year it sold $4,400,000 worth of stock to its shareholders and to the Newmont Mining Corporation in the United States. It also issued $25,000,000 in debentures. The nearly $30,000,000 thus made available is expected to cover all expenditures necessary to get the mine and the leaching plant in operation and leave a comfortable working capital.

To build the railroad, the Canadian National is putting up $10,000,000 and the Canadian Government $4,750,000. Sixteen months after the mine starts operating, Sherritt-Gordon will begin to pay an extra freight charge of $2.65 per ton until it has shipped 1,880,000 tons, when all the money will be returned to it. In addition to Sherritt-Gordon's business, the line will get some revenue for hauling timber and pulpwood and, likely, will carry a good portion of the fish now being flown from northern Manitoba to southern markets. There are also possibilities of other mines opening up along the 155-mile stretch.

The Sherridon was a producer for 25 years, having been brought to a profitable basis by veteran Canadian prospector Robert Jowsey and American mine financier Thayer Lindsley after the claims, discovered by prospectors Shelett and Burke, had been looked over and rejected by other representatives of mining concerns. Of incidental interest in connection with its early history is the fact that the first sizable aerial shipment of freight in Canada or the United States is reputed to have been made into the property.

Anxious to explore the subsurface, Jowsey contracted with Western Airways in 1927 to fly in 30 tons of diamond-drilling equipment and 30 men from Cormet Lake, the nearest rail point, 75 miles distant. Gasoline for operating the drill engine was transported in 4-gallon tins. Jowsey was upbraided by some of his associates for paying the air line seventeen cents a pound, but he convinced them that it was cheaper than having men pack the loads in and also that it had saved a lot of valuable time. Machinery and supplies for sinking shafts and mining were subsequently hauled in during the winter by 150 teams of horses and four Holt tractors. Some of this equipment is now making its second move to Lynn Lake.

All told, the Sherridon Mine produced 181,000 tons of copper, 147,000 tons of zinc, 100,000 ounces of gold and 3,000,000 ounces of silver having a combined sales value to $58,000,000. In 1950 the company employed an average of 331 persons and had a $1,660,000 payroll. The Lynn Lake operations will require about the same number of workers.

Blowing Damaged Cotton from Bales

COMPRESSED air is saving time and money in cleaning bales of cotton in California, which has in recent years become one of the nation's leading cotton-growing states. After the cotton is harvested, it is hauled to a gin, where the seeds are removed by mechanical action. Then the clean cotton is rather loosely packed in bales weighing approximately 500 pounds each and bound with narrow straps of light steel.

Because of the large number of bales on hand it is not economical to provide enough building space to house them until they are shipped to a compress, so they are ordinarily stored in fields adjacent to the gin. In most years this exposure does not damage them, but when an abnormally wet fall is experienced the bottoms of the bales become soaked with water and soiled through contact with the ground.

When the bales reach the compress, all the dirty cotton must be removed before it is rebaled into tighter, more compact bundles that will not take up so much room when they are shipped to market. Until wages rose so much as to make it impractical, this cleaning was done by hand. Pulling damaged cotton from the end of a bale was a tedious time-consuming process that sometimes necessitated loosening some or all the metal bands. From 25 to 30 pounds of cotton was generally plucked from each bale, and at more than 40 cents a pound that ran into considerable money.

A few years ago some of the cotton presses began experimenting with compressed air, and found that it did the job so successfully that the method has become more or less standard practice. By it, cleaning can be done much faster than was previously the case and, on an average, only about 10 pounds of cotton is lost from each bale. Moreover, it is no longer necessary to loosen the metal bands in order to remove all the contaminated cotton. A jet of compressed air directed over the surface in the proper manner blows off the thin soiled layer and does not gouge out the clean cotton underneath. Formerly, it took around twenty minutes per bale to do a poor job; now a much better job is done in from three to five minutes. The dirty cotton is not a total loss, but it does command a much lower price than clean cotton. It is collected and baled and most of it is sold for the making of paper pulp.

The compresses ordinarily use portable air compressors for this purpose, and because the work is seasonal they often rent the machines instead of buying them. A 315-cfm portable will supply enough air to operate two jets, which are ordinarily made by flattening the ends of short pieces of $\frac{5}{8}$-inch pipe. With both nozzles in operation, the air pressure will be drawn down from 100 psi to 60 psi if the cotton is real wet and prolonged blowing is required to loosen and remove it.

At the Haslett Compress Company at the Port of Stockton up to seven men are employed during the busy season for cleaning bales. At the Calwa compress at Fresno, where the accompanying pictures were obtained, 30,000 damaged bales were cleaned in 1950 in a period of four months.

Other methods were tried prior to the introduction of air cleaning. One compress experimented with steam jets, which removed the soiled cotton but injected undesirable moisture into the bale. Following up the jet idea, compressed air was tried and proved satisfactory from the start. It saves the cotton grower money because he loses less of the bale than he formerly did, and he also gets a smaller bill for cleaning because it takes less time to do the job. The compress likewise gains: it can process more bales each day and handle them easier and quicker because their binding bands do not have to be disturbed.

INDOOR SNOWSTORM

Removing soiled cotton from bales with blowguns at Calwa compress, Fresno, Calif. The air, at 100 psi pressure, is supplied by the Ingersoll-Rand 315-cfm portable compressor at the right.

This and That

Short of Engineers? Try Beavers

The beaver has acquired a well-earned reputation as a dam builder par excellence. With only sticks and mud as materials, and teeth, paws and tail as tools, he puts together structures that hold water well, withstand freshets and resist anything short of dynamite when man seeks to destroy them. That the animal doesn't depend solely on instinct or good luck to achieve these results is indicated by an episode reported recently in the daily press. Seven beavers were trapped in the Canadian Province of Manitoba, moved elsewhere and closely watched. They immediately set forth on a surveying expedition to locate a suitable dam site. Collectively, they traveled well over 100 miles of streams, lakes and marshes. Then they began work less than 20 feet from a stake engineers had driven a year before to mark the location of a control dam.

* * *

Tinless Tin Cans

The day will perhaps come when the so-called tin can will contain no tin, of which mighty little is used now. At least that is one of the goals of American Can Company, world's largest manufacturer of metal containers. Today's can is made of steel sheet with an extremely thin coating of tin. Each time we have a war and tin imports are curtailed, the film of tin becomes thinner. For certain uses, lacquer has been substituted for it. Now the company has announced that it will place greater emphasis on research with the eventual elimination of tin as the major objective. To facilitate the movement, a special laboratory will be set up at Maywood, Ill., and it will act in conjunction with established research work that has been conducted at three other points for many years.

* * *

Who-o-osh, She Went Thataway

In January we presented a scheme for a pneumatic freight-transportation system that was advocated by Albert Brisbane in 1872. Except that Brisbane proposed to use hollow metal spheres as carriers, his plan was almost identical with the familiar department-store pneumatic-tube system but on a much bigger scale. Brisbane was not the only one to suggest moving trains by suction. The Beach subway, an experimental section of which was built under lower Broadway in New York City about 75 years ago, was designed to operate by exhausting air from the tube in front of the cars, which ran on rails.

Nor does the idea of pneumatic transit belong solely to the past. Within recent months, Col. Sydney H. Bingham, chairman of New York City's Board of Transportation, envisioned a time when private subway tubes would run from home basements to master networks connecting all parts of the city. In this dream system travelers would be whisked through tubes in their individual push-button-controlled vehicles at high rates of speed by "compressed air of great efficiency, or some other jet arrangement without objectionable or poisonous products." Safety in transit would be assured by electronic controls designed to keep the cars separated.

The foregoing discussion reminds us that Dr. Irving Langmuir, Nobel-prize-winning electric wizard, was bold enough to suggest to a New York audience in 1943 that in a high-vacuum tunnel vehicles might travel from coast to coast in an hour. With air resistance and friction virtually eliminated, speeds of from 2000 to 5000 miles per hour would be possible, he declared.

* * *

New Tubes Are Air Misers

A pneumatic-tire inner tube that will hold its initial inflation pressure for from twelve to eighteen months has been developed by The B. F. Goodrich Company for service on coal-mine shuttle cars and, perhaps, on low-platform trailers, lift trucks and similar vehicles. The new tube has walls twice as thick as its predecessors and is made of butyl rubber, which retains air better than any other kind of rubber known. The valve cap can be removed only by authorized persons, as a special key is required for the purpose. In addition to saving the time it now takes to inflate such tires weekly, it is expected that the special tubes will eliminate the destruction of tires that now fail prematurely because they are called upon to bear too heavy a load while underinflated. The resultant flexing of the walls causes breaks. Goodrich engineers say this happens often because air compressors are not available in mines for periodic inflation.

* * *

How They Talk in Washington

Every industry develops a language of its own, but in the past two decades the Government has done pretty well along this line. Official Washington has gone in strongly for initials, but it has also come up with some surprising words, a few of which are so unintelligible to the average person that the term gobbledegook was invented to describe them. In a different category is the jargon government employees use when discussing the activities of their departments. In the course of an address *On Being a Public Official*, Secretary of Commerce Charles Sawyer mentioned this lush growth of verbiage and called it "one

"That will teach him not to lie down on the job."

of the amazing things one learns about official life in Washington."

"You don't refer to your office—you refer to your 'shop' ", reported Mr. Sawyer. "You do this in *your* shop—I do this in *my* shop. You don't delay something which you think should not be done—you 'drag your feet.' You don't postpone or slow up a program—you 'phase it out.' You don't deal with this matter under a certain description—you handle it within a certain 'framework,' and everything, of course, follows a certain 'directive.' You don't refer to a mistake in timing or a discrepancy between the objective and the accomplishment—you talk about 'slippage' or 'a short fall.' You don't say there isn't enough of something to go around—you say it is 'in short supply.' You don't appoint a group to look into a certain problem—you employ a 'task force.' You don't refer to the matter at hand as a specific problem—you refer to the assignment as an 'ad hoc' detail. You don't conclude or end a job—you 'finalize' it."

* * *

Air Aids Handling of Grain

On its way from grower to user, grain often travels a long distance and is handled several times. The method by which that is done varies with conditions, the choice of equipment depending in most instances upon the quantity to be transferred per hour or day and the availability and cost of labor.

The work of unloading bulk grain from railroad cars into elevators is done by power shovels, air-suction systems or car-dumping mechanisms. Either of the first two mentioned requires two men in a car and will empty, on an average, two 50-ton cars an hour. Car dumpers, which will handle gross loads up to 105 tons, have higher capacities.

Air suction is probably the best method for unloading ships, according to a writer in *Shipping Register and Shipbuilder*, a Canadian publication. The pneumatic equipment is flexible enough to be suitable for well-nigh any type of vessel, and the ship's own gear can be utilized, where desired, for handling the big hoses in the holds. Individual suction units having capacities up to 6000 bushels per hour are in service, and several of them can be operated at the same time by using different hatches.

Conveyor belts with a maximum capacity of 36,000 bushels an hour normally move grain around in as well as discharge it from terminal elevators. However, pneumatic equipment plays an important part in cleaning the grain and as a safeguard against dust accumulations that might cause disastrous explosions. Oftentimes the grain is cleaned by passing it through screens served by exhaust systems in which suction is induced by means of aspirators and streams of compressed air. In addition, suction systems collect dust at all points where it might otherwise be liberated to the atmosphere, and many elevators are equipped with magnets to remove tramp iron that might create dangerous sparks.

For transferring grain from trucks to river barges or railroad cars, a portable pneumatic system called the Grain-Vayor has been developed by the Myers-Sherman Company, of Streator, Ill. It was introduced last September and proved so successful that a new concern, the River-Rail Grain Corporation, was formed to make use of it for handling grain on a contract basis. In the original tests, grain was carried from trucks to barges at the rate of 3000 bushels per hour. The conveyor operates by suction induced by a fan driven by a 50-hp gasoline engine.

THE MUQUIS

—*they come from a long line of mine haunters*

THE poem on the following page was written by Virginia C. Holmgren, the wife of an Ingersoll-Rand Company salesman in South America and the author of more than a dozen books for children. In reply to our questions about muquis, she wrote:

> Muquis (moo-kees) are the traditional 'gremlins,' the little mischief-makers who live deep underground in the Peruvian Andes. They resent the invasion of the earth-dwellers who come to take away their ore, and so they vent their spite with all sorts of tricks—obscene and otherwise—on the miners. If anything goes wrong underground, from falling rocks to cave-ins and floods, the muquis are blamed, but it is a bold and reckless miner indeed that dares to curse them aloud. Many a man has dodged a falling rock and turned in time to see—he says—the tip of a red beard whisking out of sight or a mischievous face with pointed elfin ears leering from behind a toppled ore car.

A little research reveals that muquis are modern conceptions of the spirits that have long been associated with mines. All stem from the fairies, described as "a race of supernatural beings who magically intermeddle in human affairs." There was a theory in ancient times that fairies were the mental images of pigmy people that dwelt in subterranean earth houses.

Agricola, first writer of consequence on mining, told of the demons and gnomes that inhabited underground passages in Saxony. The belief in them was so general among miners that the author apparently fully accepted it. In a footnote in the translation of Agricola's *De Re Metallica* (1556) by Herbert Hoover, he wrote in 1912:

> The German miners were not alone in such beliefs, for miners generally accepted them. Even today the faith in 'knockers' has not entirely disappeared from Cornwall. Neither the sea nor the forest so lends itself to the substantiation of the supernatural as does the mine. The dead darkness, in which the miners' lamps serve only to distort every shape, the uncanny noises of restless rocks whose support has been undermined, the approach of death and danger without warning, the sudden vanishing or discovery of good fortune, all yield a thousand corroborations to minds long steeped in ignorance and prepared for the miraculous through religious teaching.

The Germans had their evil as well as their benign gnomes. The demons were called *kobetts*, which was the name for Agricola's "corrosive material," probably arsenical cobalt. Because it injured their hands and feet, the miners connected it with the goblins or used the term as an epithet, and finally it became associated with certain minerals. From it has come our word cobalt. Agricola said of the *kobelts:*

> In some of our mines . . . there are . . . pernicious pests. These are demons of ferocious aspect . . . . Demons of this kind are expelled and put to flight by prayer and fasting . . . .
>
> Then there are the gentle kind, which the Germans as well as the Greeks call *cobalos*, because they mimic men. They appear to laugh with glee and pretend to do much, but really do nothing. They are called little miners because of their dwarfish stature, which is about two feet . . . . They idle about in the shafts and tunnels . . . although they pretend to be busy in all kinds of labor, sometimes digging ore and sometimes putting into baskets that which has been dug. Sometimes they throw pebbles at the workmen, but they rarely injure them unless the workmen first ridicule or curse them . . . . The mining gnomes are especially active in the workings where metal has already been found, or where there are hopes of discovering it, because of which they do not discourage the miners, but on the contrary stimulate them and cause them to labor more vigorously.

The nearest approach to spirit miners in this country are the *diablos* or devils that are conjured up by some of the miners in the Southwest who are of Indian and Spanish descent. Their superstition is a mixture of religious and pagan beliefs. They have shrines and crosses both inside and outside the workings and visit them regularly. This is their religious side; the devils they occasionally report seeing underground constitute the pagan side.

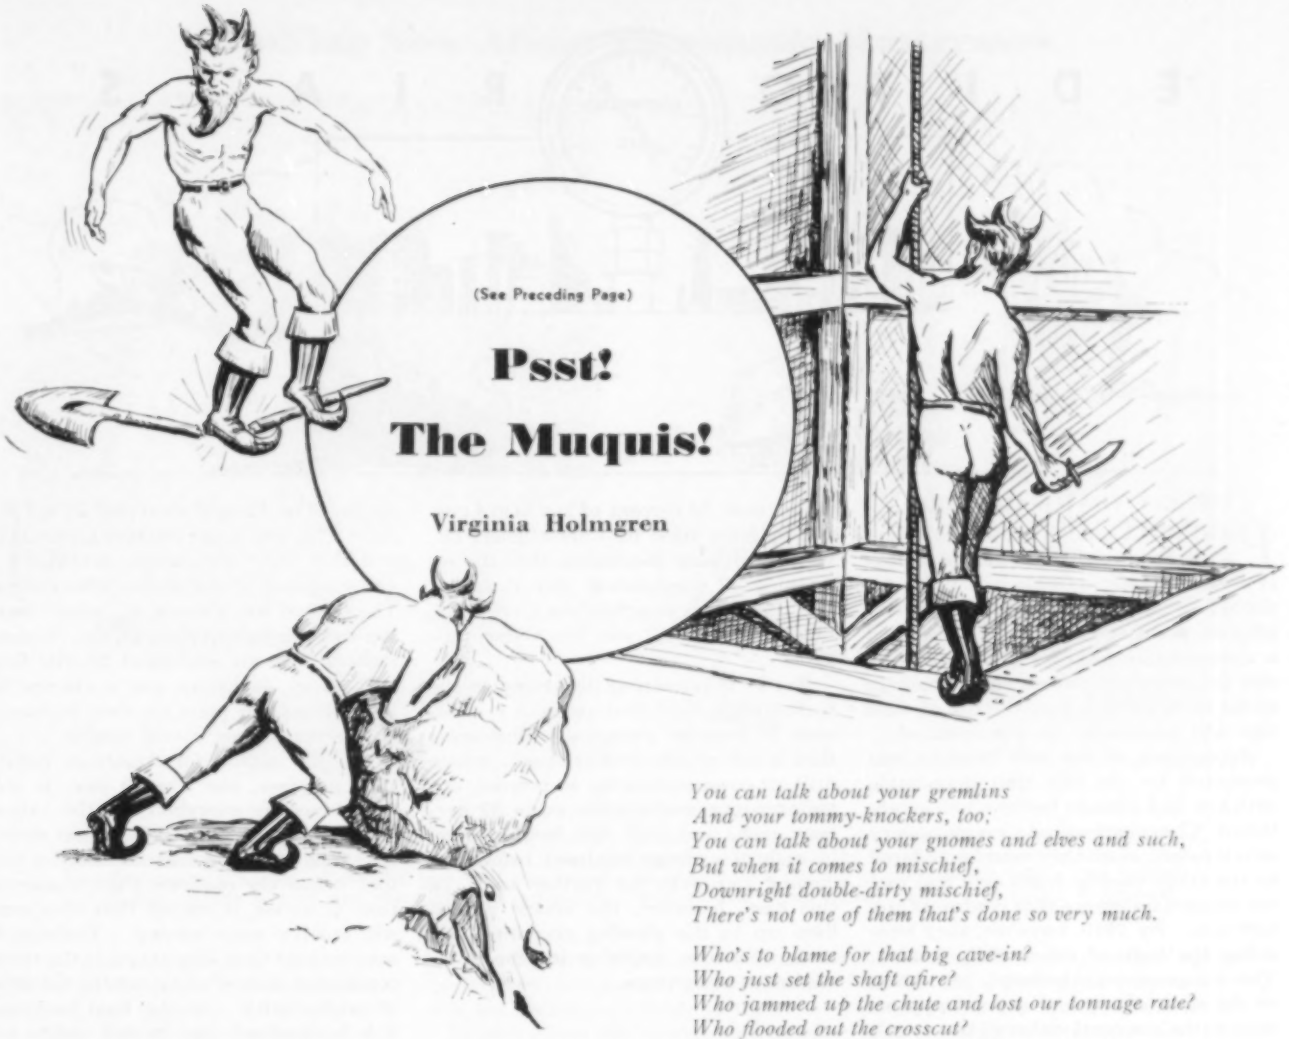

(See Preceding Page)

Psst! The Muquis!

Virginia Holmgren

You can talk about your gremlins
And your tommy-knockers, too;
You can talk about your gnomes and elves and such,
But when it comes to mischief,
Downright double-dirty mischief,
There's not one of them that's done so very much.

Who's to blame for that big cave-in?
Who just set the shaft afire?
Who jammed up the chute and lost our tonnage rate?
Who flooded out the crosscut?
Dropped the cage into the sump?
And sent the motor crashing through the gate?

It's the muquis! It's the muquis!
You can bet your bottom rock
When there's trouble in the mine that they're to blame.
Little guys with long red beards,
Long red noses, pointed ears—
Cross your fingers if you dare to speak their name!

Drawings by Andrew Svachak

EDITORIALS

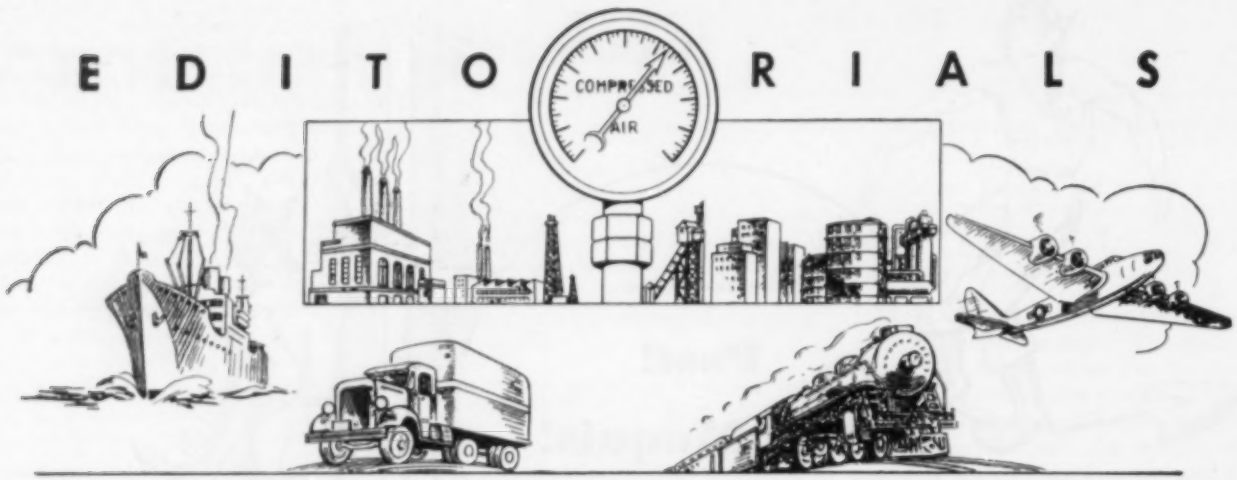

THE BIT THAT MADE GOOD

PROBABLY no other rock-drilling accessory ever won friends as quickly as the tungsten-carbide-insert bit. Although it was introduced in America only six years ago, it has already gained a commanding position in both mining and construction. Some enthusiasts go so far as to predict that the use of steel bits will eventually be discontinued.

Acceptance of the new product was promoted by the fact that detachable drill bits had already become well established. They represented a revolutionary development when they were first offered to the trade twenty years ago, and met the natural resistance that confronts any new idea. By 1940, however, they were doing the bulk of the world's drilling. The tungsten-carbide-insert bit, being of the same shape and general appearance as the conventional steel bit, wasn't looked upon with the suspicion with which the earlier innovation was greeted. But it did have to surmount the obstacle of much higher price. Despite that, though, it is actually the most economical tool so far devised for cutting rock, and thereon rests its success.

It has been little more than ten years since word filtered out of Germany regarding a new bit faced with an ultra-hard substance called Widia. American drill manufacturers tested a few of the bits and weren't impressed. They broke under the impact of repetitive blows from our high-power drills. Then somebody realized that they had been designed for the smaller, less powerful European drills.

When larger, sturdier inserts were made and applied to our accepted 4-point bits, as against the chisel type used abroad, they didn't break so easily. But they did break, and a lot had to be learned about how to make the inserts less brittle and how to do a better job of brazing them in the slots of steel bits. Once these troubles were remedied, the new bits were put on the market and were soon selling like the proverbial hot cakes. Now a spokesman for Ingersoll-Rand Company ventures the opinion that 70 percent of the firm's customers have tried its Carset insert bit. It is a foregone conclusion that the remaining 30 percent will give it a test, and if previous reactions are a criterion, most of them will join the Carset brigade.

Rarely is something developed in the rock-drilling field that permits a salesman to promise prospective customers that it will double drilling speed, reduce drill air consumption by 40 percent, cut maintenance and powder costs 30 percent each, and drill 300 feet or more in rock of average hardness before becoming too worn for further use. In this case, however, the article offered lives up to the glowing accounts, and that, of course, explains its almost unanimous acceptance.

THE FRENCH LOOK AT US

EUROPEAN industrialists who were brought over here with the hope that they might benefit by observing how we do things have formed some definite opinions regarding what makes our industrial machine tick. Some shoe manufacturers from France wrote a report that does not entirely follow the usual pattern. For example, the conclusion was reached that the secret of American productivity is not to be found primarily in our machines. It was brought out, in fact, that our tools and mechanical setups for making shoes are not radically different from those in France. But American productivity, measured in purchasing power, is four times that of the French, and is paid for accordingly. This means that the average French shoe-factory employee with an hourly wage of 30 cents has to put in 60 hours to pay for a pair of shoes a Yankee worker can earn in thirteen hours at his hourly pay of $1.50.

The French say the difference is mainly one of state of mind, American workers being more productivity-minded than the French. Back of this, they say, is the way in which wage earners are regarded here; their social standing, so to speak. The French marveled at the respect with which our workers are treated and that they are always identified by name instead of remaining anonymous. They noted the absence of "class" feeling and of inferiority complexes, circumstances that are explained by the fact that every American has a chance to be promoted or start his own business, and perhaps even attain wealth.

Another reason for American industrial progress, the French say, is the acceptance by everybody of the axiom that "time is money." The report states that "the whole American industrial history decisively confirms that whenever time is saved, it means that everyone will receive more money. Perhaps it may be said that this axiom is the most condensed manner of expressing the idea of productivity. In the final analysis, if it is admitted that money means increased purchasing power, the search for ways to save time is the key to productivity and to the road it opens."

THE DISTAFF SIDE

HIGH-SCHOOL girls apparently have been reading about the shortage of engineering graduates and decided to do something about it. Clifford Evanson, head of a Chicago engineering firm, predicts that enrollment of women in technical colleges will increase in 1952.

The idea of women technologists is not new, even though the profession has always been dominated by men. Nor is there any sound reason why women can't handle run-of-the-mill engineering assignments.

Tau Beta Pi, collegiate engineering scholarship fraternity, has made a concession in awarding special badges to 124 "lady" engineers and will, it is believed, soon grant women full membership privileges. Should the paucity of he-men graduates be prolonged, the distaff side of the race may well take over many of them. If the trend continues, makers of slide rules and other engineering office tools will perhaps add fashion designers to their staffs.

Nothing New About Pneumatic Mattresses

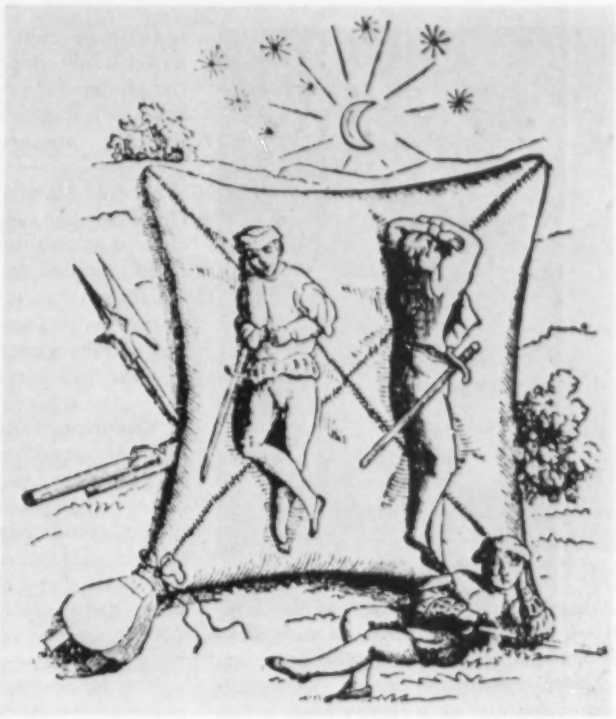

HELIOGABALUS VS GOODRICH

Here is evidence that the bed of the campaigning doughboy was just as soft in third-century Rome as it is in twentieth-century Korea. Take the pup tent and snow out of the modern picture and substitute the moon and summer foliage and the two scenes would not differ greatly, except for the bellows. Incredibly, it's a part of the ancient instead of the modern bed. The bellows was, of course, the Roman version of an air compressor.

THE accompanying pictures lend truth to the saying that there's nothing new under the sun. In this instance we might add "under the moon," for we notice that the lunar disk is much in evidence in one of the illustrations.

Here we see two types of pneumatic mattresses that were designed for the use of soldiers in the field. Although identical in principle, they were conceived seventeen centuries apart. Those being modeled by the G.I.'s were just announced by The B.F. Goodrich Company, which is making them for our armed forces. The other one was regular equipment of the legionaries of Heliogabalus, a Roman emperor who died in the year 222. The sketch appeared originally in a fourth-century book on military affairs by Flavius Vegetius Rematus and was reproduced in our fiftieth anniversary edition in March, 1946.

The Goodrich mattress is made of rubber and nylon, neither of which was available to Heliogabalus. It weighs 3 pounds and can, when deflated, be folded into a flat packet about 15 inches square for stowing in a soldier's pack. We do not know what materials the Romans used, but the bag appears to have been made of hides sewn together. The mattress obviously weighed more than its modern counterpart, for it was large enough to accommodate two sleepers with plenty of room to spare. In an era *sans* zippers, Scotch tape and other modern conveniences, it is not apparent how the seams were made airtight.

In one respect the ancient air bed was superior to the 1952 model. It will be noticed that there is a bellows at the lower left-hand corner for inflating it, whereas the American soldiers must rely on their own lungs.

It may well be that Heliogabalus was the first person to utilize compressed air for human comfort. He furnished inflated cushions for his guests to recline on at banquets and sometimes suddenly let the air out of them to amuse himself, so it is recorded. He must have been the original compressed-air prankster. Possibly, he was popular with his troops because of the air-mattress idea. In fact, they staged an insurrection that landed him on the throne, where he ruled as Marcus Aurelius Antoninus. But he lived such a dissolute life that the people turned against him and put him to death after a reign of not quite four years.

MAN-MADE GRAVEL

ACCORDING to a recent announcement from Cornell University, two members of its staff—professors Benjamin K. Hough, of the School of Civil Engineering, and Julian C. Smith, of the School of Chemical and Metallurgical Engineering—have discovered a process by which mud, sand, or clay can be converted into gravel suitable for roadbuilding and other purposes. The research that led to the development was sponsored by the Corps of Engineers, U. S. Army.

One of the ingredients of the new material is sulphite liquor, a waste product of the papermaking industry for which chemists have long been trying to find a market. Mixed with earth or sand and some chromium and sodium or potassium, the mass is fused in a briquetting machine into pieces a little bigger than a dog biscuit. These are reduced in size by passing them through a crusher. It is reported that the material showed no signs of deterioration after a 6-month period underwater and stood up well under freezing and thawing. The man-made gravel is not economical, but promises to be useful for roadbuilding in regions where Nature's product is scarce.

Tests have indicated that the chrome-sulphite liquor mixture is also a good soil stabilizer. It will penetrate a sandy surface to a depth of several inches, thus changing it into a stiff, rubbery mass that will support aircraft or other heavy vehicles.

Industrial Notes

Plants using quantities of uniform, fitted hose lengths may be interested in an air-powered ferrule contracting machine announced by A. Schrader's Son. Mounted on a sturdy base, it can be used anywhere within convenient reach of a shop air line and is controlled by a foot valve, leaving both the operator's hands free to insert and remove the work. Known as No. 1765, the bench-type unit is said to do a neat, airtight job consistently without tiring the worker. Interchangeable dies permit quick change in setup from one size ferrule to another.

Leopold Marsteller, a masseur of Bonn, Germany, has devised a massaging machine that operates with compressed air. It is intended to be used as a health aid rather than a beautician's tool. He claims that it increases blood circulation and thereby reduces pain caused by rheumatism and kindred ailments.

Aluminum Industries, Inc., has announced an addition to its line of Permite membrane compounds for curing concrete. Designated as Permite W-95, it is a fast-drying spray-on compound that is said to exceed the most rigid specifications of the U. S. Army Engineers and state codes. A gallon seals 200 square feet of horizontal surface.

For the dustless transfer of powdered or granular materials in industrial plants, Airborne Conveyors Corporation has developed the mobile unit shown in the accompanying illustration. Completely self-contained, it serves to empty shipping containers, to replenish bins and hoppers feeding powdered resins to molding and injection presses, to deliver foods from mixers, blenders and other processing equipment to filling and weighing machines for packaging and to perform many similar services. In loading the overhead receiver of the conveyor, air entering the suction line with the bulk material flows through a cyclone on top of the unit to extract the solids, which drop into the hopper while the air goes through a hose to a centrifugal separator for the removal of any remaining particles, which fall into a collector underneath. The air stream then passes through a suction blower and a filter bag for final cleaning. The size of the receiver depends upon service requirements, but usually has a volume of 6 cubic feet. The gate at the bottom can be manually opened and closed or set for automatic operation. In the latter case the material feeds by gravity until

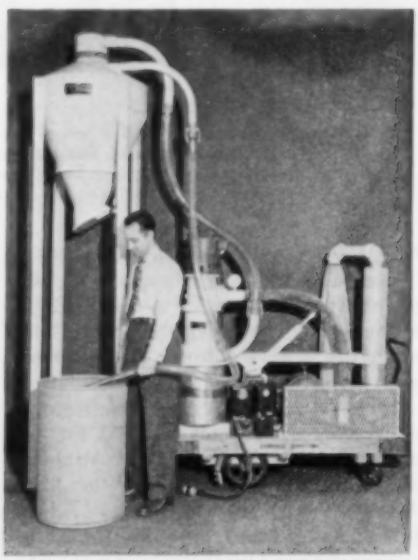

the hopper is empty, the gate closing the instant the positive rotary blower is started. The latter is driven through V-belt by a 5-hp motor. Loading speed depends upon the material being handled and the distance it has to be elevated. Granulated sugar, for example, entering the receiver at a point 9 feet above floor level, as in the case of the unit shown, can be conveyed at the rate of 150 pounds a minute and wheat flour, which does not flow freely, at about 100 pounds a minute.

Hydrair is the name of an unusual drilling device that is making its initial appearance at the American Society of Tool Engineers' show held this month in Chicago, Ill. A development of The Bellows Company, it is an electrically controlled, air-powered tool with the feed

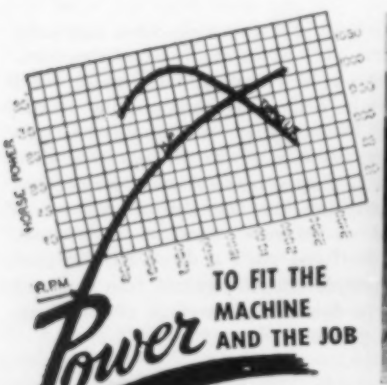

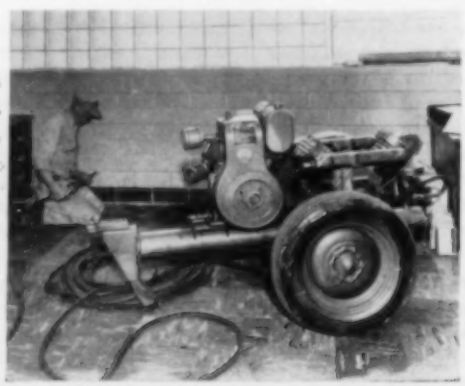

Power TO FIT THE MACHINE AND THE JOB

WISCONSIN-POWERED
Ingersoll-Rand Compressor

Wheeling a modern, mobile compressor to any spot it's needed is easy when it's an Ingersoll-Rand. Then doing a day's work on *location* is also a "sure thing" if a Wisconsin Heavy-Duty Air-Cooled Engine supplies the power.

The search for full-rated power that's dependable ends almost always with Wisconsin Engines . . . *first choice* everywhere, 3 to 30 hp. For example, every Wisconsin Engine crankshaft rides at both ends on tapered roller bearings, reducing the chance of bearing failure. Also, Wisconsin Engine magnetos mount on the OUTSIDE for easy servicing, but most important each magneto is equipped with an impulse coupling for quick starts in any weather. Steady running is assured, too, because of fool-proof air-cooling, summer and winter. Follow the lead of many who say, "Wisconsin Engine Power fits the machine and job." And, write today for "Power Magic" covering all 4-cycle single-cylinder, 2-cylinder and V-type 4-cylinder models, 3 to 30 hp.

WISCONSIN MOTOR CORPORATION
World's Largest Builders of Heavy-Duty Air-Cooled Engines
MILWAUKEE 46, WISCONSIN



rate under hydraulic control. The spindle is advanced and retracted quickly by a Bellows air cylinder with a built-in Electroaire valve, and the feed rate is adjustable from 0 to 200 inches per minute with air at 90 psi by a Hydro-Check, another company product. The unit has a speed range of from 500 to 17,000 rpm (rated free speed of spindle 2800 rpm) making it suitable for drilling ¼-inch holes to a maximum depth of 4 inches in a wide range of materials.

Controlled entirely by air cylinders and valves, Lipe-Rollway Corporation's new fully automatic magazine-loaded bar feed for Brown & Sharpe automatic screw machines is said to increase production from 20 to 60 percent. The unit is relatively easy to operate, and it takes only five to fifteen minutes to change from one job to another of different stock diameter and length. Time required to eject end of bar and to restock machine is four seconds. The magazine has a capacity ranging from nineteen bars of ⅝-inch round to 96 bars of ⅛-inch diameter and needs only occasional loading. Variations in bar length up to 2 feet do not affect the operation of the unit. Feed cylinder uses air at 18 to 35 psi, but no air is admitted into the feed tube. Four models are available.

Chemically treated wood fibers prevent the loss of expensive mud used in drilling oil wells, according to a report from the petroleum industry. Mixed with the mud, they expand about six times their original size, caking porous walls and filling cracks that would permit the mud, that serves as a lubricant, to escape as the drill descends.

Three services in one are provided by a new process that is said to clean, derust and prevent rerusting of steel, cast and malleable iron and iron alloys. The metal acts as the cathode in a solution of Compound No. 134—an alkaline powder—supplied by Enthone, Inc. The metal remains in the bath from a few seconds to several minutes, depending upon its surface condition and the density of the current (d-c). Zinc can be added to the solution in the steel tank to clean, pickle and give products a protective plating in one operation.

Injection speeds up to 400 feet per minute are claimed by The Hydraulic Press Manufacturing Company for its new Model 400-AB die caster and are attributed to a built-in nitrogen accumulator system. In operation, hydraulic fluid under pressure from a variable-displacement pump forces the injection ram backward and compresses the nitrogen gas in the accumulator bottle,

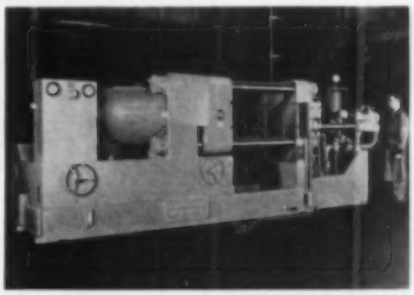

which is connected directly to the double-acting injection cylinder. By-passing the hydraulic fluid from the pump and releasing that in the forward end of the injection cylinder permit the nitrogen to expand and force the ram forward at a rapid rate, the speed being reg-

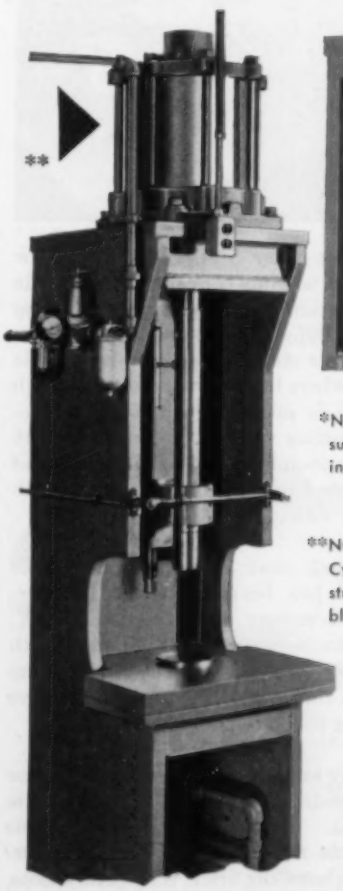



*NOPAK Model "E" Cylinder supplies clamping or holding power for work-piece.

**NOPAK Model "D" 12"x8" Cylinder provides power stroke for "squeeze assembly" operation.

PRESS MOVEMENTS
Powered by
NOPAK CYLINDERS

Throughout industry, a variety of vital press movements are powered by NOPAK Cylinders, both air and hydraulic. For example, you'll find them on arbor presses, kick presses, punch presses, drill presses, baling presses, assembling presses, forming presses, power shears, power brakes, clamping devices, and similar equipment. NOPAK Valves control the cylinder movement.

If you build presses, there is probably a NOPAK Cylinder that's *just right* for your needs. Perhaps there are mechanically or manually operated presses in your plant which could be powered by air or hydraulic NOPAK Cylinders, and controlled by NOPAK Valves, to save valuable time, eliminate needless manual effort, speed up production.

GALLAND-HENNING MFG. CO.
2759 SOUTH 31ST STREET • MILWAUKEE 46, WISCONSIN

Representatives in Principal Cities

•

Refer to Sweet's File for Product Designers or write for Bulletin SW-1

NOPAK
VALVES AND CYLINDERS
DESIGNED for AIR and HYDRAULIC SERVICE

How NAYLOR Light-weight Pipe is built to take it

Here is the picture story of how Naylor creates a light-weight pipe for heavy-duty service.

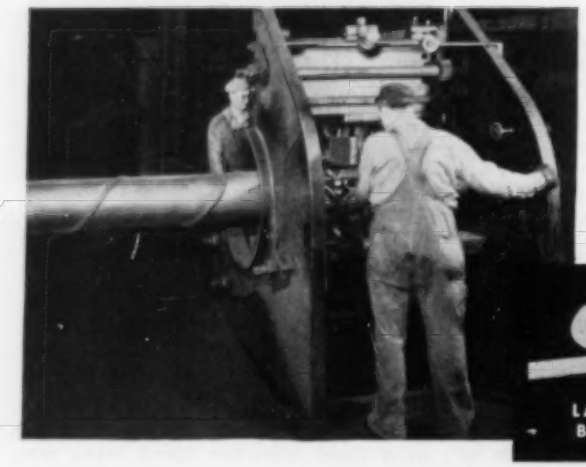

In this operation, the Naylor pipe machine forms sheet into a spiral, lock-seamed pipe. This process creates a structure that is pipe before it is welded. As shown in the sketch of a lateral section before welding, the lockseam carries the structural load.

Illustrated here is the Naylor automatic welding process which welds the lock-seamed spiral to the wall of the pipe. This step provides a positive seal as shown in the lateral-section sketch after welding.

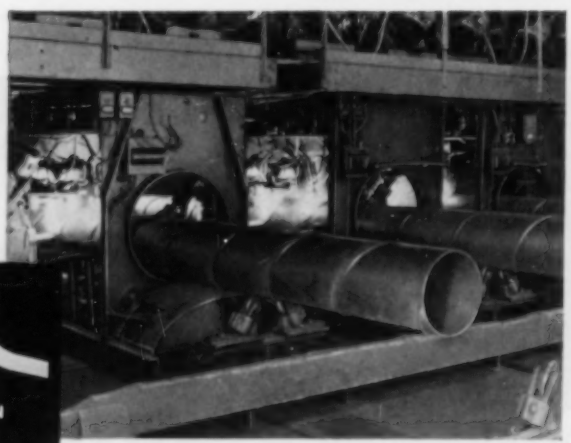

Because the lockseam carries the load and the weld is relieved of any strain, Naylor pipe provides the practical answer for lines that must stand up in rugged service in the mining field.

Write for Bulletin No. 507

Naylor Pipe Company
1245 E. 92nd St., Chicago 19, Ill.
New York Office:
350 Madison Ave., New York 17, N.Y.

ulated by controlling the flow of the hydraulic fluid. The machine was designed for the production of aluminum castings weighing up to 12 pounds but can be readily adapted for die-casting brass and magnesium. It includes such features as a hydraulic ejector and a hydroelectric safety device which guards against premature injection.

Worn or undersize parts such as crankshafts and power and compressor cylinders can be built up to their required size by an electrolytic iron-plating process developed by Van der Horst Corporation of America. The metal, known as Vanderloy M, can be applied to a thickness of ¼ inch or more, and the bond between it and the base metal is said to be indestructible. The deposit is machinable with high-speed steel cutters and can be ground or honed. Temperature of plating bath is low enough to permit masking with wax.

Sprague Engineering & Sales Corporation has announced a new Hydraulic Power Package with an output range of 3500 to 30,000 psi for test purposes. The unit comes complete with air-operated pump, muffler, filter, lubricator, regulator, valves, etc., all mounted on

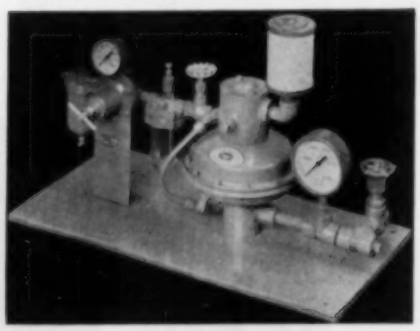

an easy-to-carry base. It is ready for service as soon as connections are made with its outlet fluid port and a shop line supplying air at 100 psi. Works with either oil or water, and is suitable for use where low-volume output at high pressure is needed, such as in hydrostatic testing. Operates automatically on the principle of differential areas and is furnished in six standard models with varying ratios from 35:1 to 300:1.

A bomb that is helpful instead of harmful has been developed by Fyr-Larm Company of Syracuse, N. Y. Made to hang up, it is charged with gas which escapes when the temperature reaches 130°F, blowing a whistle to give warning that fire threatens.

Easily adjustable tie strings keep new hand protectors in place and facilitate removal. Pads are made of genuine horsehide for long wear for such purposes as handling brick, tile, metal sheets, stampings, sharp-edged castings, paper

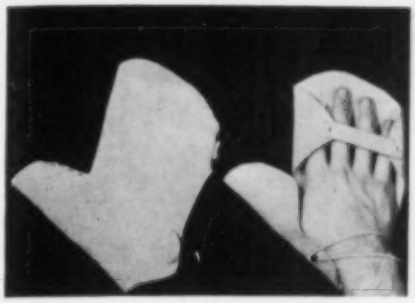

and a variety of other products that are liable to injure workers' hands. Known as Safti-Mitt Handpads (Style 1201) they fit any size hand with comfort. They are offered by General Scientific Equipment Company, 27th and Huntingdon Streets, Philadelphia 32, Pa.

Norton Company has announced a new hub-type wheel with which an operator can rough and finish grind and notch, work that normally requires the use of different wheels. It is made of a carded web material impregnated with an abrasive grain and is designed for use on right-angle or sander-type portable grinders. According to the manufacturer, the wheel is flexible and combines lightness with unusual strength, which is imparted to it by a safety web built into the back. Should breakage occur, the web is intended to hold the pieces together until the machine can be stopped. Known as the Norton BFR wheel, its primary use is to smooth down welds, blend surfaces on contours and notch risers in all kinds of castings.

Solid waxes in stick form are a new product of S. C. Johnson & Son, Inc., for metalworking operations such as sanding, sawing, pipe cutting and threading, drilling, tapping, grinding and flush riveting. Designated as No. 140 Stik-Wax, it can be applied manually as needed or set in position for application as machine operates. According to the maker, the lubricant lengthens the life of tools, gives work pieces a better than usual

"Hello, Ace Construction Company? I have a complaint."

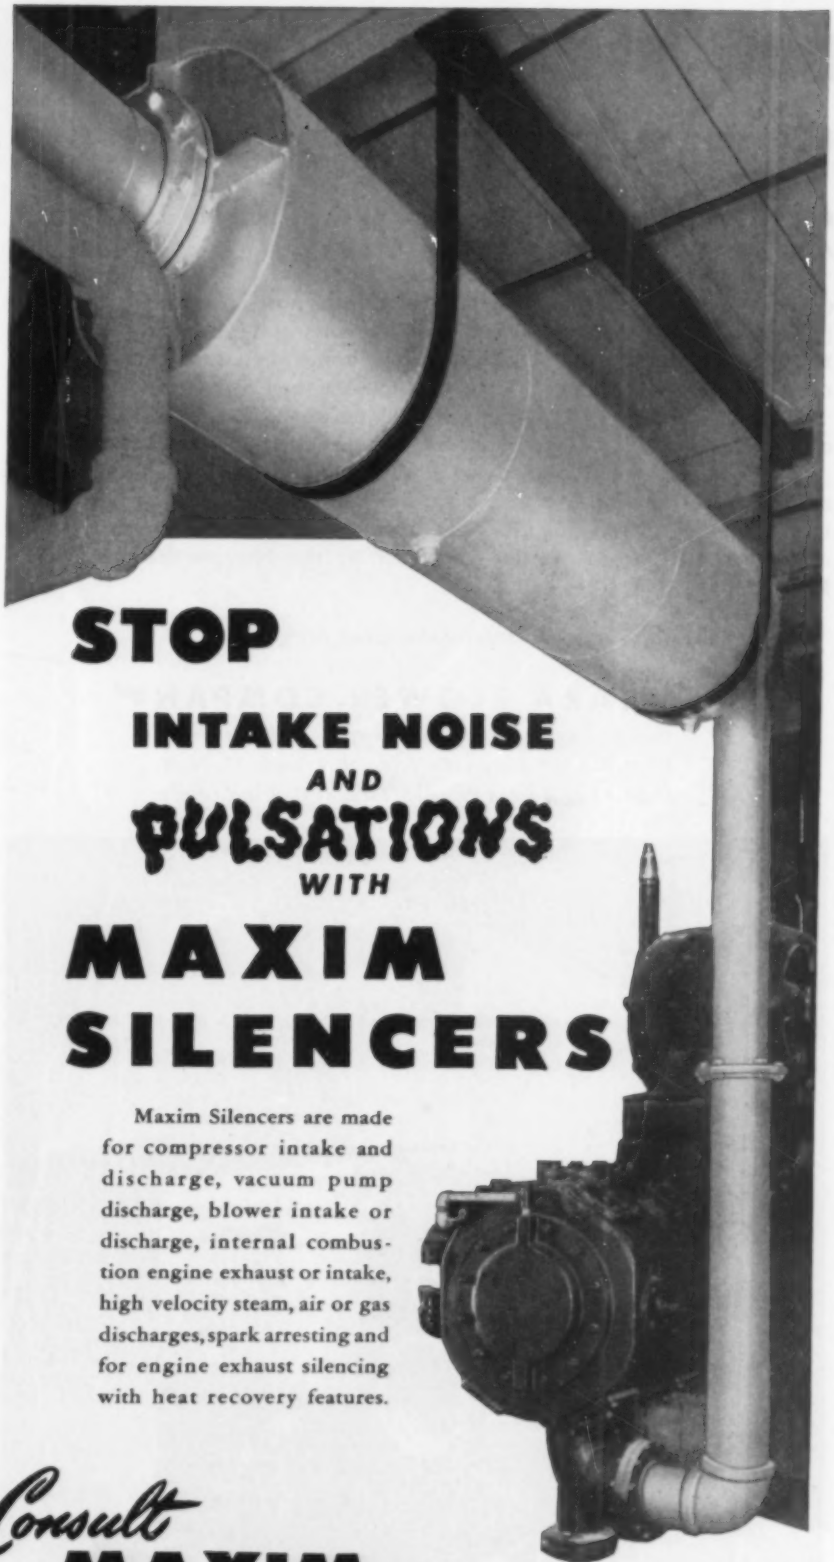

STOP

INTAKE NOISE
AND
PULSATIONS
WITH
MAXIM SILENCERS

Maxim Silencers are made for compressor intake and discharge, vacuum pump discharge, blower intake or discharge, internal combustion engine exhaust or intake, high velocity steam, air or gas discharges, spark arresting and for engine exhaust silencing with heat recovery features.

Consult **MAXIM**

THE MAXIM SILENCER COMPANY
61 Homestead Ave., Hartford 1, Connecticut, Dept. W. L.
Gentlemen: Please send me your bulletin on silencers for
☐ Compressor Intake ☐ Internal Combustion Engines
☐ Steam Blow-off ☐ Spark Arresting ☐ Heat Recovery.
Name _____
Company _____
Address _____
_____

HOW YOU SAVE,
Getting Drier Compressed Air

● Direct saving in the cost of cooling water saves the price of the Niagara Aero After Cooler (for compressed air or gas) in less than two years.

Extra, for no cost, the drier air gives you a better operation and lower costs in the use of all air-operated tools and machines, paint spraying, sand blasting or moisture-free air cleaning. Water saving also means less expense for piping, pumping, water treatment and water disposal, or you get the use of water elsewhere in your plant where it may be badly needed.

Niagara Aero After Cooler assures all these benefits because it cools compressed air or gas below the temperature of the surrounding atmosphere; there can be no further condensation in your air lines. It condenses the moisture by passing the air thru a coil on the surface of which water is evaporated, transferring the heat to the atmosphere. It is installed outdoors, protected from freezing in winter by the Niagara Balanced Wet Bulb Control.

Write for complete information; ask for Bulletin No. 98

NIAGARA BLOWER COMPANY

Over 35 Years of Service in Industrial Air Engineering
Dept. CA 405 Lexington Ave., New York 17, N. Y.
District Engineers in Principal Cities of U. S. and Canada

INDUSTRIAL COOLING HEATING • DRYING
NIAGARA
HUMIDIFYING • AIR ENGINEERING EQUIPMENT



finish and eliminates burrs when metal is cut or drilled. Stick is 2 inches in diameter and weighs a pound. Obtainable from distributors of Johnson Wax lubricants and coolants.

C. A. Norgren Company has added a new pressure regulator to its line of pneumatic products that is said to be the first of its kind to insure precise control at low air flow (0-2 cfm) at a reasonable cost. It is designed for use with air-controlled instruments but is also applicable to any process requiring nitrogen or other inert gases. The unit operates on primary line pressures up to 400 psi, with delivery pressures ranging from 0 to 30 psi, and is equipped to prevent build-up of excessive pressures that might affect instrument performance or damage parts.

By a new system of Cool Grinding developed by The DoAll Company, the heat generated during the process of cutting tool-steel alloys is dissipated sufficiently, it is claimed, to prevent cracking and "skin" softening. This is done by forcing the coolant through the wheel instead of pumping it on to the work piece, where the air blast created by the spinning wheel keeps the solution away from the area where it is most needed—under the wheel. In the case of the Cool Grinding method, the coolant drips into a retaining groove in the wheel and is atomized by centrifugal force, thus flushing the wheel and actu-

---

"It's just a disguise to protect his tool chest."

ally keeping it saturated. Coolant feed is controlled by regulators with visual flow gauges. The company reports that optical pyrometers have indicated reductions in cutting temperatures of as much as 600° by its system. Ordinary vitreous-bonded wheels can be used because they are porous enough to permit coolant flow.

Variable and sensitive pressure control is one of the features of a new line of air presses built by Famco Machine Company for continuous operation ranging from heavy crimping, forming, pressing and embossing to light work such as assembling delicate instruments, jewelry, etc. The power unit is a Bendix-Westinghouse frictionless cylinder of the diaphragm type with spring return and is said to insure millions of strokes without the maintenance problems caused by faulty piston rings, leakage, etc. It can be adjusted vertically by loosening a cam and turning a hand wheel. There are five types of four sizes each, with single or dual air or electronic control. The press shown is a single air-control unit which delivers a squeeze pressure of 3835-6335 psi at maximum stroke (4 inches) with air at 80-150 psi.

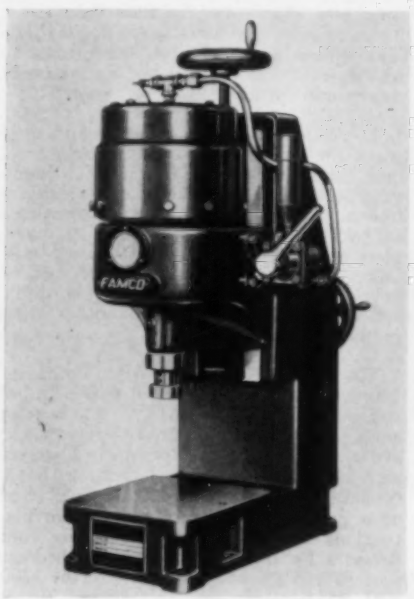

The last of 47,000 machine tools in a Navy stockpile has now been taken out of "mothballs" and put to work by contractors making materials for the Army, Navy and Air Force. From 1945 to the time fighting began in Korea, the Navy had acquired and repaired 40,000 tools, worth half a billion dollars at today's replacement prices. In succeeding months it purchased 7000 others. They were gradually doled out to avoid bottlenecks in the production of strategic materials. The final allotment disposed of 10,000 machines.

THE VICTAULIC METHOD OF PIPING

EASIEST WAY TO MAKE ENDS MEET

The Victaulic Method is the only complete, modern mechanical development in piping construction . . . offering a fast, simple hook-up that streamlines piping . . . cuts costs.

The Victaulic Method represents a comprehensive system built around easy to install, versatile Victaulic Couplings . . . world famous for quick, leak-proof pipe connections. For use with these efficient couplings, Victaulic offers a complete line of modern Full-Flow Elbows, Tees, Reducers and other Fittings . . . plus Victaulic's easy-to-use, portable Vic-Groover Tools for preparing standard pipe ends easily and quickly. Victaulic Couplings, Full-Flow Fittings, and Vic-Groover Tools comprise the complete Victaulic Method for fast, dependable, on-the-job piping.

For new construction, repairs or alterations . . . for any piping job, big or small, the VICTAULIC METHOD *is the easiest way to make ends meet.* Mis-alignments, expansion and contraction are automatically taken care of by Victaulic and locked-joint, leak-proof piping is assured.

Save time, work, and dollars on piping construction—make that next job ALL VICTAULIC.

Write today for Victaulic Catalog & Engineering Manual No. 44-8B

VICTAULIC
COMPANY OF AMERICA
P. O. Box 509 • Elizabeth, N. J.
Office and Plant: 1100 Morris Ave. Union, N. J.
Telephone: ELizabeth 4-2141

28th VICTAULIC YEAR

California: Victaulic Inc., 727 W. 7th St., Los Angeles 14
Canada: Victaulic Co. of Canada Ltd., 406 Hopewell Ave., Toronto 10
Export: Pipe Couplings, Inc., 30 Rockefeller Plaza, N. Y. 20, N. Y.

LE-HI Makes a Good Connection TOO!

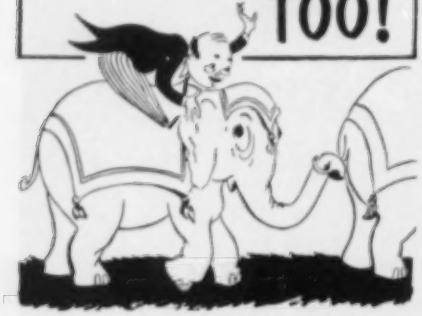

Specify LE-HI for all Hose Couplings!

Wherever hose is used there is a LE-HI hose coupling to match—from small tubing to large industrial applications.... The complete LE-HI line includes:

- Air Tool Couplings
- Welding Hose Couplings
- Steam Hose Couplings
- Fire Hose Couplings
- Acid Hose Couplings
- Sand and Blower Hose Couplings

SERIES 100

SERIES 600

- Drilling Hose Couplings
- Oil and Gas Hose Couplings
- Agricultural Hose Couplings

. . . plus complete lines of hose clamps, air valves and manifolds.

Sold through leading distributors and rubber manufacturers only.

"Old Doc" says: "Write now for your free copy of the complete LE-HI catalog"

HOSE ACCESSORIES COMPANY

1722 Lehigh Ave.
Philadelphia, Pa.

LE-HI Makes a Good Connection!

LE-HI
HIGH and LOW PRESSURE
HOSE COUPLINGS
TRADEMARK REGISTERED

Books and Industrial Literature

Corporation executives and others with or without a technical accounting background, as well as financial officers, accountants and instructors will find a wealth of helpful information in the 1952 edition of *Mapi Accounting Manual*. It is a sweeping revision of the preceding work, since which time new accounting and financial problems have been born, some have matured and the work of accounting in the capital-goods and equipment industries has become increasingly complex. The new cloth-bound 1210-page manual contains ten sections on financial statements and reports; property, plant and equipment; sales engineering and administrative expenses; profit planning and budgeting; pensions and recognition of changing value of the dollar, among others. Published by Machinery & Allied Products Institute, 120 S. La Salle Street, Chicago 3, Ill. Price, $15.00.

Tool Steel Handbook is the title of a 197-page volume published by the Allegheny Ludlum Steel Corporation for engineers, teachers, metallurgists and others interested in tool, die and allied steels. The book starts out with charts and tables giving specific and comparative data on properties, analyses and applications. This is followed by detailed descriptions of all important grades, arranged alphabetically for easy reference. Succeeding chapters deal with the many forms and finishes available and with certain allied products such as Carmet carbides; heat treating and handling techniques as applied to tool and high-speed steels; and a complete set of weight tables and other useful material. Qualified persons can obtain a free copy on request to the company, 2020 Oliver Building, Pittsburgh 22, Pa.

Because of the current industrial changeover, many metalworking plants are using materials with which they are not familiar. To help them, The American Brass Company, Waterbury 20, Conn., has prepared two comprehensive, well-illustrated books on copper and alloys of copper. Publication B-14 deals with Anaconda free-cutting brass rods for the manufacture of screw-machine products. It contains much valuable information in its 24 pages, including the physical constants and properties of 46 rods. *Machining Copper and Copper Base Alloys* is the title of the second book —Publication B-3. In addition to suggesting cutting speeds, feeds, tool rakes and clearances for more than 40 different alloys, it gives many practical hints on turning, cutting-off and form tools; drills, reamers and taps; and thread chasers, milling cutters and coolants. Both are obtainable free of charge.

Barrett-Cravens Company, 4609 S. Western Boulevard, Chicago 9, Ill., is offering a bulletin (5110) describing and illustrating its line of single-stroke hand lift trucks, which are available in capacities up to 4000 pounds.

Air, gas, steam and liquid relief valves made by Kunkle Valve Company for original equipment are dealt with in an illustrated folder obtainable upon request addressed to 130 S. Clinton Street, Fort Wayne, Ind. Subject matter includes new Kunkle designs and valves formerly made by the Star Brass Manufacturing Company.

Catalogue No. 250-E-1, obtainable from American Hoist & Derrick Company, St. Paul 1, Minn., has to do with its portable material elevator that features an interchangeable platform and ½-cubic-yard concrete bucket. Quickly erected, it serves heights up to 96 feet, travels 90 feet per minute and handles loads up to 2500 pounds.

Electric-motor repair shops may be interested in the announcement of a new 3-phase coil winder head that winds any mush-type coil from 2¼x5 to 11½x19½ inches for motors ranging from ¼ to 75 hp. One of its features is said to be an instantaneous tension release. For information on this new device write to Dept. A., Crown Industrial Products Company, Park and Borden Avenue, Sycamore, Ill.

Those concerned with boiler operation and maintenance should be interested in a new 24-page catalogue and data book offered by Ramtite Company, Division of the S. Obermayer Company, 2563 W. 18th Street, Chicago 8, Ill. Titled *Boiler Settings with Plastic and Castable Refractories*, it contains numerous cross-sectional drawings, charts and technical illustrations, as well as information about the manufacture, design and installation of refractories.

To get across to its customers and prospects the story of its facilities and products, International Steel Company of Evansville, Ind., has published and is offering free a profusely illustrated 44-page book called *This is International Steel*. It makes plain that the concern is not only a steel fabricator but also a manufacturer of revolving industrial doors of all kinds, standard steel buildings and many other allied products.

The Electric Machinery Mfg. Company, Minneapolis 13, Minn., will furnish upon request copies of a paper by G. L. Oscarson entitled *Application of Direct-Connected Synchronous Motors to Reciprocating Compressors*. The article deals largely with the consideration of proper rotor flywheel effect as a preventive measure for voltage fluctuations when driving reciprocating compressors by direct-connected synchronous motors. Write for Publication No. 1200-TEC-1111.

Dust Recorder Checks Operation of Precipitators is the title of a bulletin offered by Minneapolis-Honeywell Regulator Company. It fully describes the new General Power Plant Corporation's gas analyzer with a Brown ElectroniK potentiometer which gives a continual record of the dust content of any atmosphere where there is a minimum dust concentration of 0.0003 grain per cubic foot. Address your request for Honeywell Instrumentation Data Sheet No. 10.14-6 to the company's Brown Instruments Division, Station 40, Wayne and Windrim Avenues, Philadelphia 44, Pa.

Those with problems pertaining to expansion, contraction and offset movements of pipes and conduits may be interested in a 40-page catalogue published by Solar Aircraft Company, maker of industrial expansion joints and aircraft bellows. Several unique designs are described, as well as unusual installations for absorbing motion resulting from pressure or temperature changes in conducted gases or liquids. The bellows assemblies are manufactured for pipes ranging in size from ½ inch to 72 inches and for pressures from vacuum to 1000 pounds. Catalogue No. 51 may be obtained from the company, 2200 Pacific Highway, San Diego 12, Calif.

RESEARCH KEEPS **B.F.Goodrich** FIRST IN RUBBER

This hose handles 85% of all air hose needs

May save you days of waiting for special hose and save you money too

IF your company had 100 different uses of air hose, this hose would, on the average, do 85 of those jobs—and last longer doing them than other air hose. It's B. F. Goodrich Type 50 air hose—for shop tools, air tampers, light and heavy portable compressors, air hoists, ore mining and quarry service—or, as we say, 85% of all air hose requirements.

Saves waiting—In normal times every B. F. Goodrich distributor has Type 50 hose for immediate delivery. You don't have to wait for special kinds of hose; you don't hold up important production. Even in periods of shortage it may save you time because your distributor may get it for you much more quickly.

Oil won't rot it—This Type 50 air hose has a tube that won't break into loose, gummy particles, clogging up tools. The cover is oil-resisting too. Workers with oily hands or gloves can handle it, use it near oily machines and surfaces.

Rough treatment won't tear it—On almost any job, air hose has to be dragged over rough surfaces, always in danger of costly tears, breaks, snags. The cover of B. F. Goodrich Type 50 air hose is abrasion-resisting. Scraping over rock, rough floors, cinders or roads won't tear it. Won't check or crack from constant sunlight.

Your local BFG distributor has all the details and prices on Type 50 air hose. Give him a call, or write *The B. F. Goodrich Company, Industrial & General Products Division, Akron, Ohio.*

Air Hose BY

B.F.Goodrich

Stronger, more durable air hose is made with neoprene

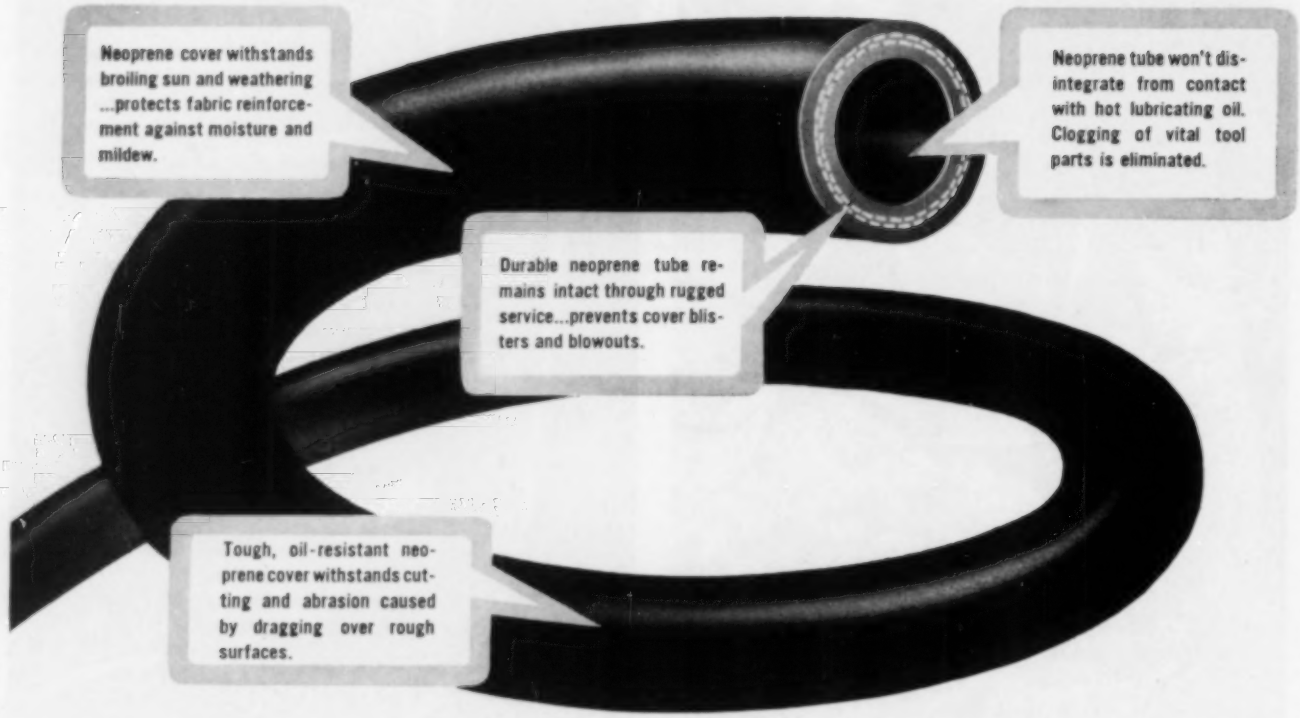
Neoprene cover withstands broiling sun and weathering ...protects fabric reinforcement against moisture and mildew.
Neoprene tube won't disintegrate from contact with hot lubricating oil. Clogging of vital tool parts is eliminated.
Durable neoprene tube remains intact through rugged service...prevents cover blisters and blowouts.
Tough, oil-resistant neoprene cover withstands cutting and abrasion caused by dragging over rough surfaces.

Where the going is rough, on all kinds of jobs, you'll find air hose made with Du Pont neoprene going the limit—turning in endurance records for dependable, trouble-free service.

Neoprene's inherent properties are responsible for such outstanding performance. For neoprene resists deteriorating influences that usually ruin ordinary rubber. And its strength and durability put neoprene hose in a class of its own.

So next time you need air hose, ask your supplier for hose made with cover and tube of Du Pont neoprene. Whatever your specific needs, there's a neoprene hose to fit your requirements. You'll find that neoprene's combination of excellent properties means top performance on the job with lower maintenance costs.

SPECIFY HOSE MADE OF

NEOPRENE

The rubber made by Du Pont since 1932

FREE! The Neoprene Notebook. Each issue points out new, unusual applications of neoprene . . . new products . . . interesting stories. Write today to get on the mailing list. E. I. du Pont de Nemours & Co. (Inc.), Rubber Chemicals Div., Y-3, Wilmington 98, Delaware.

DU PONT
REG. U.S. PAT. OFF.

150th Anniversary

BETTER THINGS FOR BETTER LIVING...*THROUGH CHEMISTRY*

SAVE TIME

...and trouble, too, by calling us for genuine Cook packing parts!

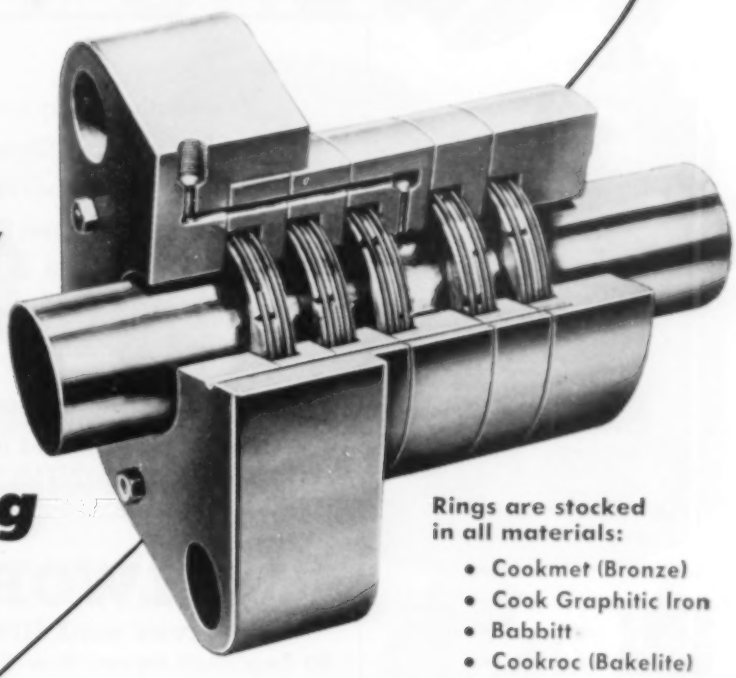

Rings are stocked in all materials:

- Cookmet (Bronze)
- Cook Graphitic Iron
- Babbitt
- Cookroc (Bakelite)

THE CONVENIENT LOCATION OF COOK'S branch offices and warehouses throughout the country puts packing replacements right at your fingertips. A phone call to your COOK representative giving details of your requirements is all that's needed to get your shipment underway. Efficient warehousing facilities enable us to make shipments with a minimum of delay. Stocks of all standard sizes of Cook Graphitic Iron, Babbitt, Cookmet (bronze) and Cookroc (bakelite) rings are subject to immediate delivery. Yes, you'll appreciate the time-and-money-saving advantages of always asking for genuine COOK replacement parts - parts that you can count on to give you years of efficient, trouble-free service.

C. Lee Cook Mfg. Company, Incorporated, Louisville, Ky. Branch offices in Baltimore, Boston, Chicago, Cleveland, Houston, Los Angeles, Mobile, New Orleans, New York, San Francisco and Tulsa.

COOK

ROD PACKINGS



. . . SEALING PRESSURES SINCE 1888 . . .

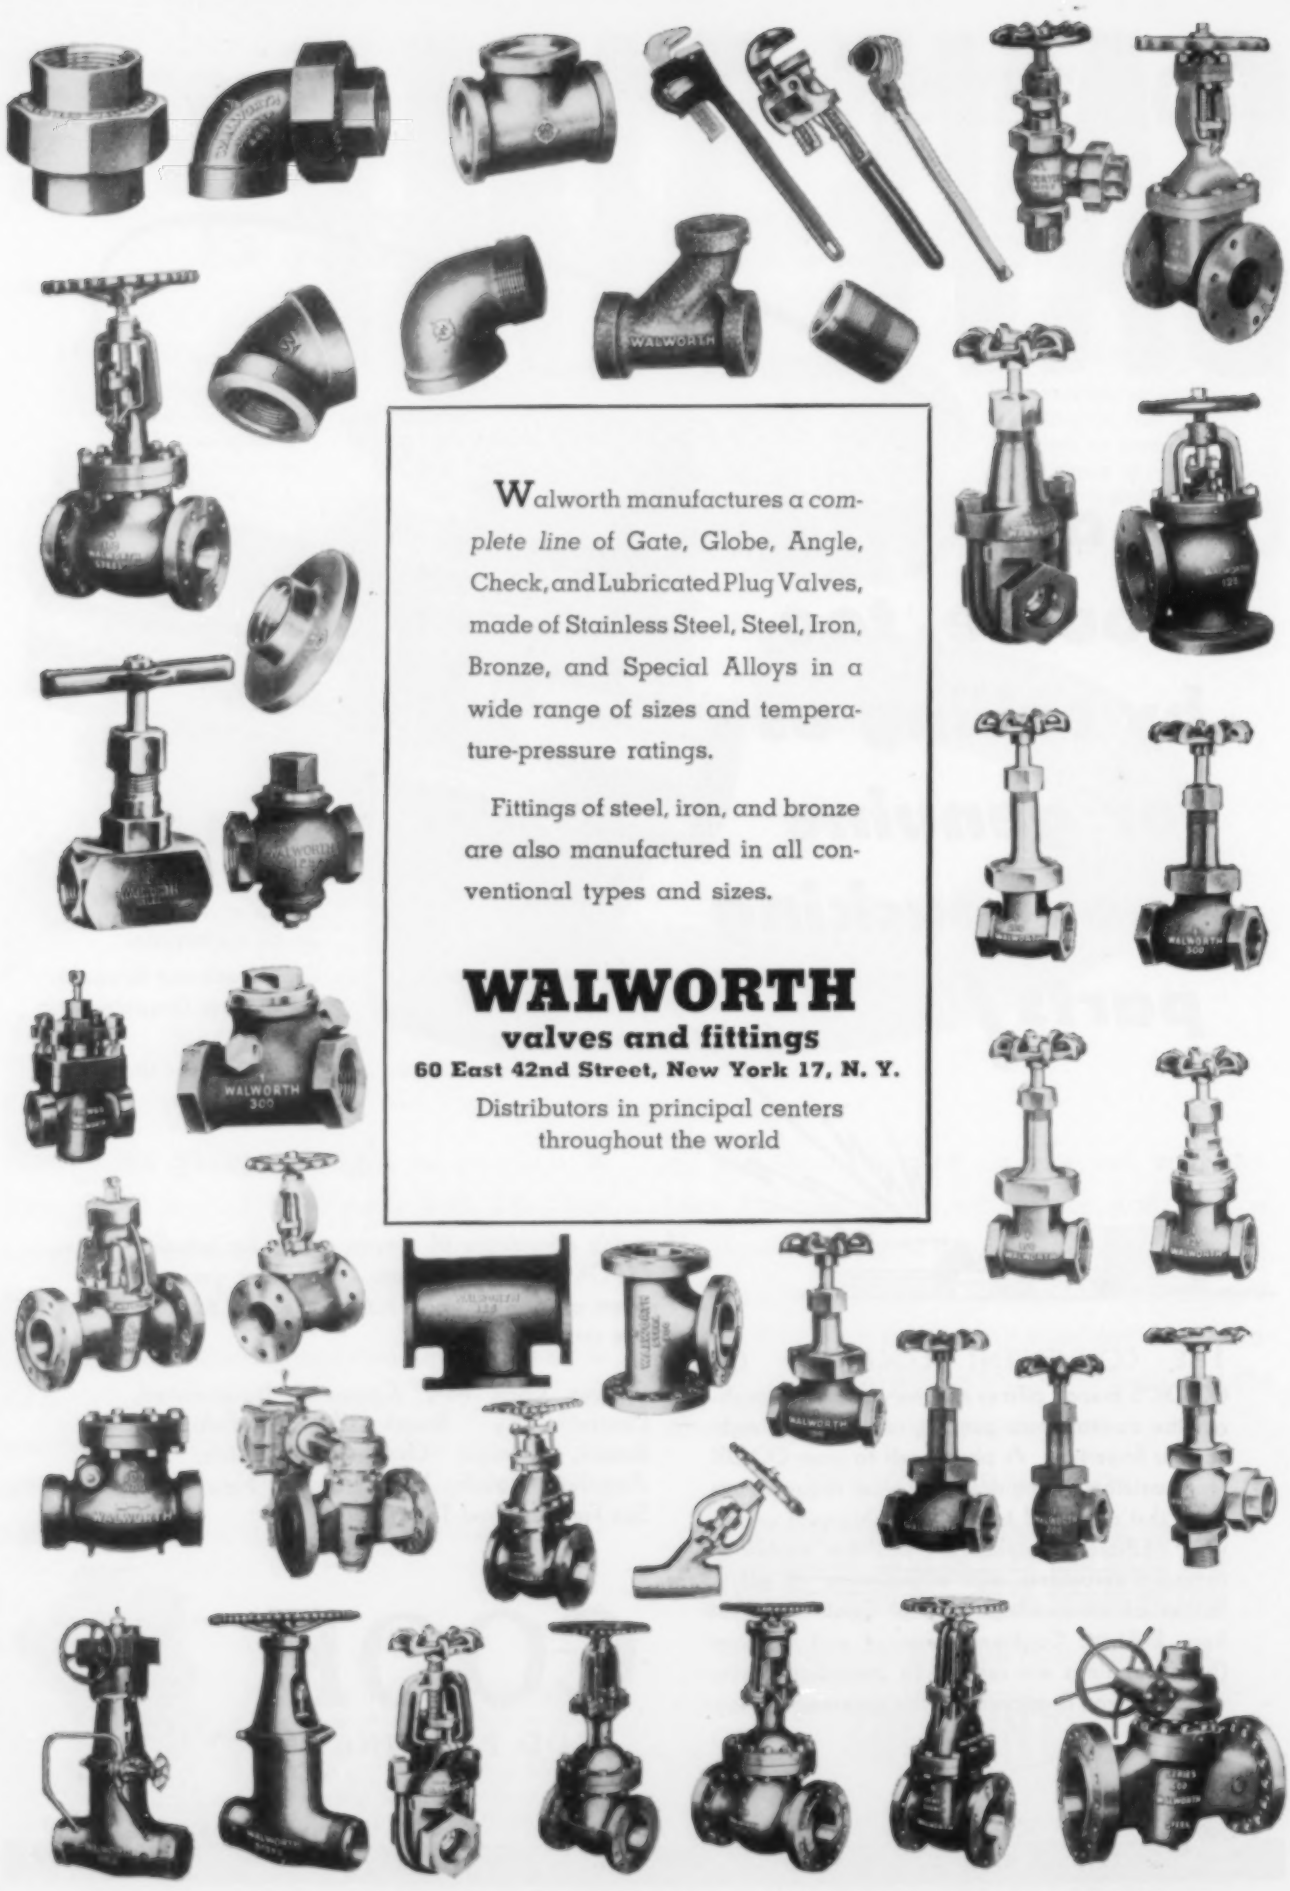

Walworth manufactures a *complete line* of Gate, Globe, Angle, Check, and Lubricated Plug Valves, made of Stainless Steel, Steel, Iron, Bronze, and Special Alloys in a wide range of sizes and temperature-pressure ratings.

Fittings of steel, iron, and bronze are also manufactured in all conventional types and sizes.

WALWORTH

valves and fittings

60 East 42nd Street, New York 17, N. Y.

Distributors in principal centers throughout the world



Service Reports Show that

GARLOCK CHEVRON*

* Reg. U.S. Pat. Off.

SEALS BETTER, LASTS LONGER

than ordinary V-type packings on rams, plungers and reciprocating rods

GARLOCK CHEVRON Packing is entirely different from an ordinary V-type packing. Its distinctive hinge-like construction provides greater flexibility without loss of strength and results in a quicker, positive automatic sealing action.

With increasing pressures Chevron rings tighten and prevent leakage; with decreasing pressures the packing eases off and permits operation with a minimum of friction.

Service reports, such as those at the right, prove that Chevron seals better, needs less maintenance, and lasts longer.

For general applications specify 430 CHEVRON for cold and warm water service; 431 CHEVRON for cold and warm oil; 530 CHEVRON for steam, air or gas; 531 CHEVRON for hot oil. For special applications GARLOCK CHEVRON is made of "Teflon" and other special materials.

Typical CHEVRON Service Reports:

- Oil hydraulic presses packed with ordinary V-type packing. Due to oil seepage down ram special hoods had to be installed to protect operators. Installed all-synthetic rubber type Chevron alternated with Garlock Bitan V leathers. Result-rams are perfectly dry and protective hoods have been removed.
- Boiler feed pump in state institution. Operates average of 6 hours per day—365 days per year pumping water at 212-220 deg. F., 170 psi, discharge, 15 ft. head positive suction. Packed with Garlock 430 Chevron in 1942. Packing still operating efficiently.
- Reciprocating pumps in pipe line pumping stations. Pressures up to 700 psi. Stuffing boxes bushed to shallower depth as only four Chevron packing rings required to handle work performed previously by a much greater number of ordinary packing rings. Maintenance men very pleased with long life of Chevron packing and particularly lack of need for gland adjustment for changes of gravity in the crude oil being pumped.

THE GARLOCK PACKING COMPANY
PALMYRA, NEW YORK
In Canada: The Garlock Packing Company of Canada Ltd., Toronto, Ont.

GARLOCK

PACKINGS, GASKETS, OIL SEALS, MECHANICAL SEALS

TOOL UP FOR PROGRESS with TOLEDO

...Leader in Pipe Tools for 50 Years!

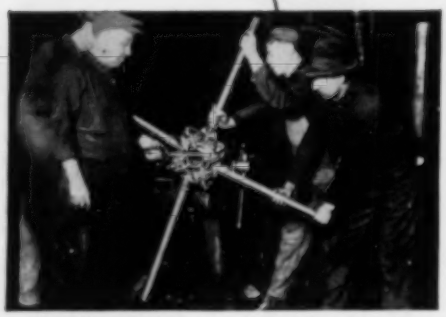

Threading 3" pipe was a slow, tedious job with this old-time device (not a Toledo).

Today, 4" pipe can be cut off, reamed, threaded in close to a minute using Toledo No. 1-2-4 machine.

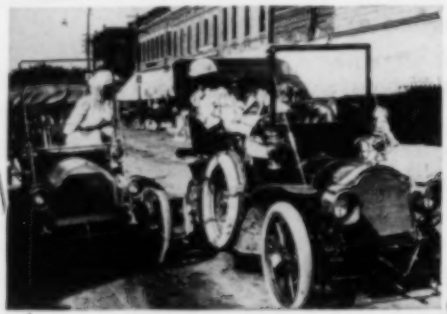

Horseless carriages on Main Street were evidence of industrial progress fifty years ago.

Today, super cars and other amazing products are made in plants served by miles of threaded pipe.

Fifty years ago . . . in the days of Henry Ford's first car and the Wright Brothers' flight . . . a revolutionary new principle in pipe threading was discovered by W. W. Vosper, inventor of Toledo Pipe Tools and now Chairman of the Board.

This was destined to ease the work and save time of mechanics for years to come! Instead of solid dies, segments were used with only enough teeth on their cutting edge to form a thread—thus reducing friction. Also, as the thread was cut the dies receded—thereby further relieving friction.

This was the beginning of Toledo Pipe Tools in 1902 . . . the Leader in its field since the very start. Today—better mechanics from coast to coast prefer TOLEDO hand tools and power pipe machines . . . to *speed the work* and *reduce costs!* Write for new catalog. The Toledo Pipe Threading Machine Co., Toledo, Ohio. New York Office: 165 Broadway, Room 1310.



Toledo Simpact, self-contained, 1" to 2" threader.



Toledo No. 999 2" Power Pipe Machine.

RELY ON THE LEADER

TOLEDO PIPE TOOLS...

POWER PIPE MACHINES...POWER DRIVES

INGERSOLL-RAND PUMPS USED IN NATURAL GASOLINE RECOVERY

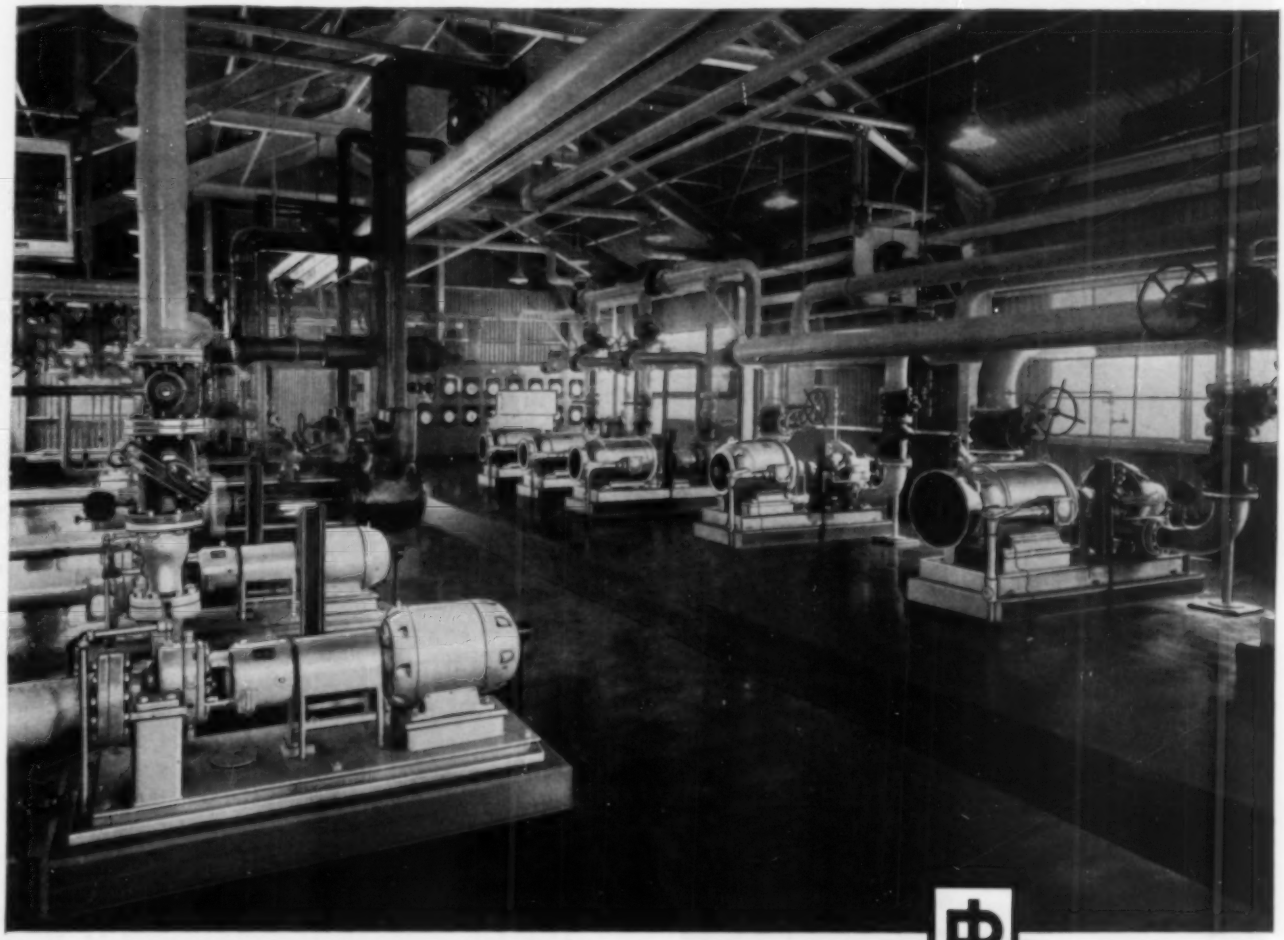

Magnolia Petroleum Company's Hickok Plant, located near Ulysses, Kansas, is currently processing 120 million cubic feet of natural gas daily. From this gas, 100% of the natural gasoline, 50% of the butane and 17% of the propane are recovered by the absorption process. Residue gas is sold to a pipeline. Oil circulation rate is automatically controlled to maintain minimum heating value of 950 BTU. A well pressure of 300 psi makes plant compression unnecessary at the present time.

All centrifugal pumps used in the plant were supplied by Ingersoll-Rand. The Class BSFL Process pumps in the left foreground of the illustration above handle gasoline at 95°F. Other units handle lean and rich oils and the distilled LPG's butane and propane.

Ingersoll-Rand builds a complete line of dependable pumping equipment for the petroleum and refining industries. For real, long-range economy, call in Ingersoll-Rand on your next pumping problem and take advantage of their many years of practical, field experience.

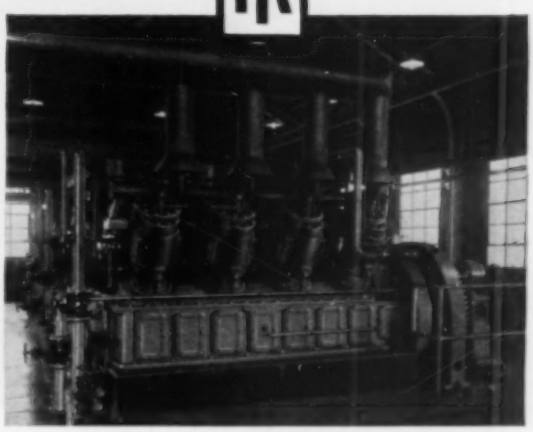

Three, 8-cylinder I-R Class PVG gas engines provide power for the Hickok Plant. Developing 370 hp, these 4-cycle, V-design units drive 300 kw generators. Two I-R Motorpumps handle the cooling water for the engines.

Ingersoll-Rand

Cameron Pump Division, 11 Broadway, New York 4, N. Y.

709-10

COMPRESSORS AIR AND ELECTRIC TOOLS GAS ENGINES PUMPS TURBO-BLOWERS VACUUM EQUIPMENT

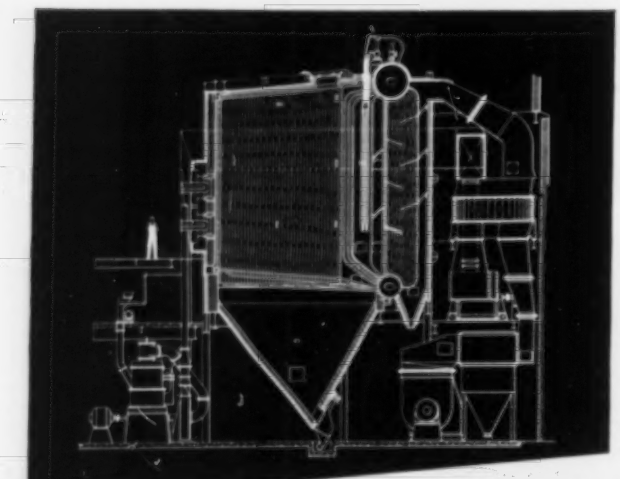

VU installation in a TEXTILE PLANT. This unit is fired with pulverized coal. Capacity—150,000 lb of steam per hour; operating pressure—600 psi; steam temperature—700 F.

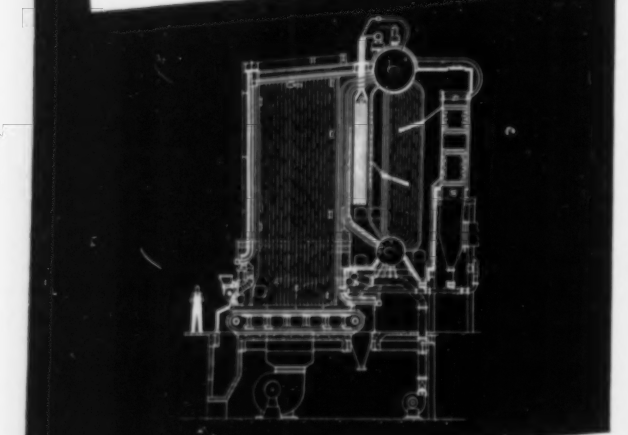

VU installation in a TOBACCO PLANT. This unit is fired by a C-E Spreader Stoker (continuous discharge type). Capacity—80,000 lb of steam per hr; operating pressure —425 psi; steam temperature—650 F.

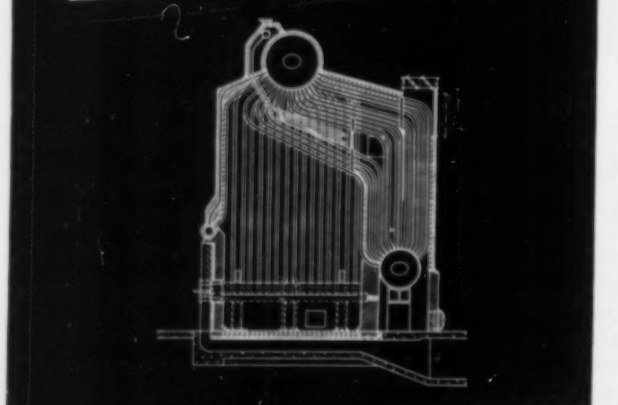

VU installation in an AUTOMOTIVE PLANT. This unit is fired with oil. Capacity—40,000 lb of steam per hour; operating pressure—150 psi.

How different are your steam requirements?

Every engineer knows that steam requirements vary from industry to industry . . . from plant to plant. It is virtually certain, therefore, that your particular conditions of fuel, load, capacity, pressure and temperature are not exactly the same as those of any other plant.

Yet the C-E Vertical-Unit Boiler can deliver top performance in your plant . . . just as it has done in hundreds of others . . . representing a wide variety of steam conditions.

This is because the basic design of the VU allows exceptional latitude in the selection of the *right* boiler to fit your particular requirements. It is available in capacities from 10,000 to 350,000 lb of steam per hr, with pressures from 160 to 1000 psi and temperatures up to 900 F, or more. It is adaptable to limited space conditions and to the use of any fuel or method of firing. The VU may be operated over a wide range of output, and, depending on fuels and the use of heat recovery equipment, efficiencies range up to 88%.

How well is the Vertical-Unit Boiler meeting the steam requirements of different industries? The answer is to be found in an impressive record of orders and repeat orders covering virtually every field. If you would like first hand information on the story of the VU Unit in *your* industry we would be glad to send it to you.

* * *

The point is that the story is the same . . . in industry after industry . . . *the popularity of the C-E Vertical Unit Boiler is widespread and steadily increasing.* Why not investigate how the variables of your requirements can be matched with the VU Unit for top performance?

B-540

C-E

COMBUSTION ENGINEERING—SUPERHEATER, INC.

200 MADISON AVENUE
NEW YORK 16, N. Y.

ALL TYPES OF BOILERS, FURNACES, PULVERIZED FUEL SYSTEMS AND STOKERS; ALSO SUPERHEATERS, ECONOMIZERS AND AIR HEATERS

TERRY

THIS TURBINE WHEEL

has no parts to loosen or work out

The rotor of the Terry Solid-wheel Turbine is a single forging of special composition steel, in which a series of semi-circular buckets is milled. There are no separate parts to become loose or work out.

The power-producing action of the steam takes place on the curved surfaces at the back of the buckets. Hence, wear of the blades is of little consequence, as it does not materially affect horsepower or efficiency. There is practically no end thrust since the steam enters and leaves the wheel in a direction at right angles to shaft.

This is only a small part of the story of the many advantages of the Terry Solid-wheel Turbine. Write for complete details.

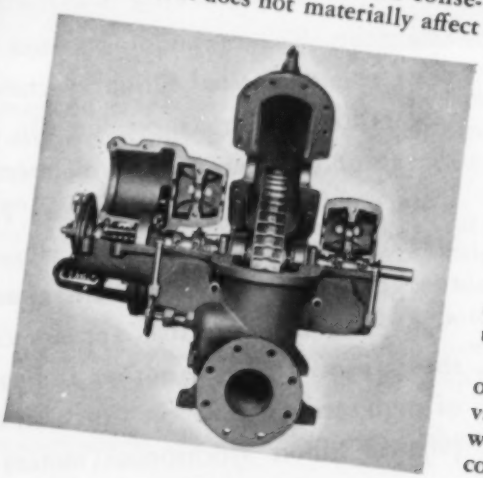

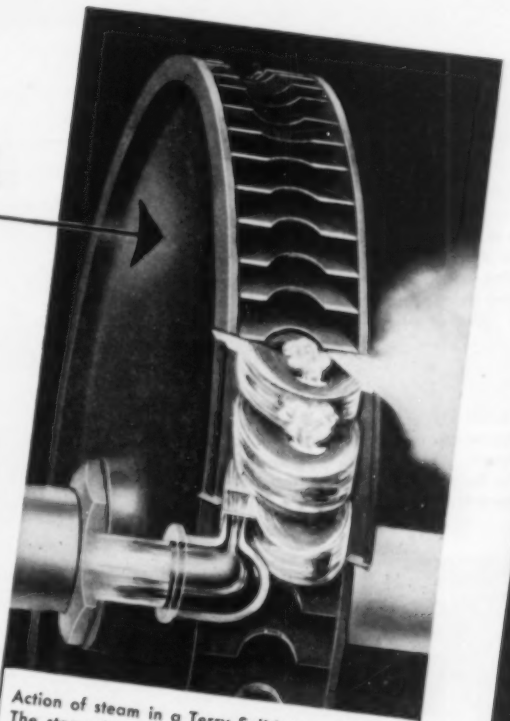

Action of steam in a Terry Solid-wheel Turbine. The steam issues from an expanding nozzle at high velocity and enters the side of the wheel bucket where its direction is reversed 180°. As this single reversal uses but a portion of the available energy, the steam is caught in a stationary reversing chamber and returned again to the wheel. This process is repeated several times until practically all of the useful energy has been utilized.

THE TERRY STEAM TURBINE CO.

TERRY SQUARE, HARTFORD 1, CONN.

TT-1189

Memo

Send for a copy of bulletin S-116 which describes the many advantages of the Terry Solid-wheel Turbine.

High Power Factor maintained with
ELLIOTT *SYNCHRONOUS* MOTORS

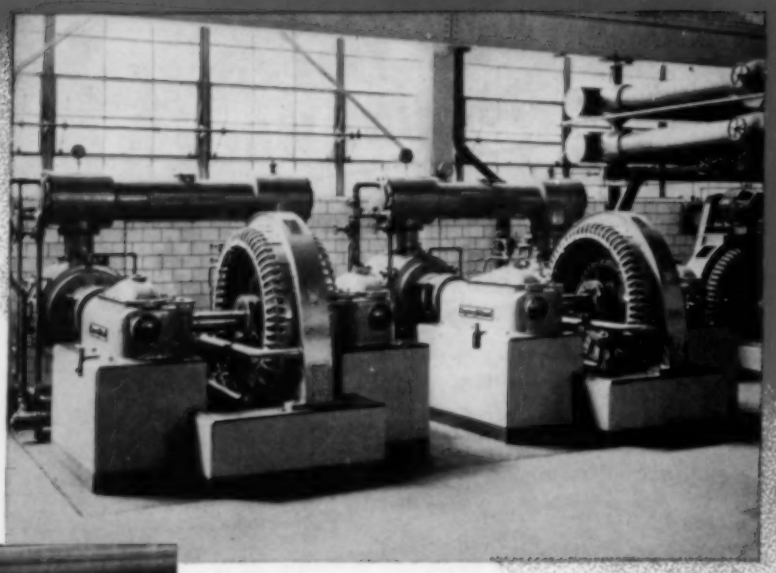

Photo at right shows two Elliott 125-hp, 360-rpm motors driving air compressors. The off-center mounting of motor between the two compressor cylinders allows for stator shift. Motors have split rotors. Exciters are belt-driven, floor mounted.

Three Elliott 175-hp, 360-rpm synchronous motors with top-mounted exciters drive the refrigeration compressors. Necessary Wk^2 has been incorporated in the motor design to eliminate necessity of separate flywheel.

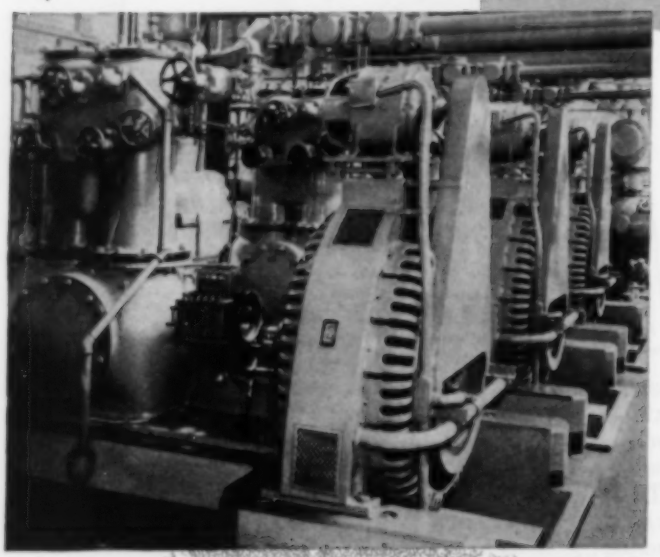

Falls City Brewing Company, Louisville, Ky., in building a fine new power plant, selected Elliott synchronous motors for driving compressors. In addition to high power-factor maintenance, these motors, with their efficient "Fabri-Steel" design and construction, allow for the greatest flexibility in installation. Note, too, the attractive appearance of these installations—another indication of engineering excellence. Check on these popular Elliott synchronous motors for your next application. Write for bulletin PB5000-1 today.

Elliott
FABRI-STEEL
MOTORS AND GENERATORS

L-811

ELLIOTT COMPANY
DEPT. CA
RIDGWAY DIVISION • RIDGWAY, PA.
JEANNETTE, PA. • RIDGWAY, PA. • AMPERE, N. J. • SPRINGFIELD, O. • NEWARK, N. J.
District Offices in Principal Cities

What He's Gained by Keeping Records on Wire Rope

This man buys and uses a lot of wire rope. For years he never knew exactly which brand was giving him the best service. Then he realized he'd better find out; it could save him important money.

So now he's keeping records on all his major ropes. He knows the date they go to work, the type of work they do, and just *how much* they do. His records enable him to check on different brands; they show him which make of rope is doing the biggest job per dollar spent. And he's wondering why he didn't adopt the system years ago.

Do you keep records like this? We at Bethlehem encourage the practice, for it's the only real way you can determine a "good buy" in rope. And when Bethlehem rope is involved in any comparisons you make, we naturally feel that it will soon demonstrate its basic soundness, durability, and all-around economy.

In every detail the Bethlehem product is made to the highest standards of quality. If it were not, we'd be foolish to suggest a means of comparison with other brands. But the plain truth is, Bethlehem wire rope will slug it out on any job you have . . . and your own records will prove it!

BETHLEHEM STEEL COMPANY, BETHLEHEM, PA.

On the Pacific Coast Bethlehem products are sold by Bethlehem Pacific Coast Steel Corporation
Export Distributor: Bethlehem Steel Export Corporation

LET YOUR RECORDS TELL YOU!

ADAMS *has both* *

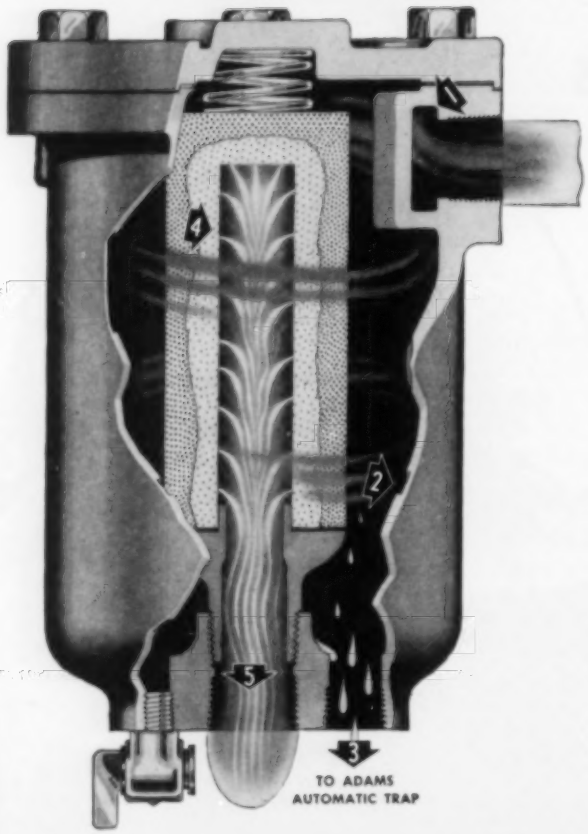

—— BOTH ANSWERS TO THE PROBLEM OF KEEPING WATER, WATER VAPOR, OIL AND DIRT OUT OF COMPRESSED AIR LINES

There's no *one* answer to this problem! The most expensive aftercooler you can buy will not remove scale that is picked up in the distribution lines. The most expensive air filter you can buy cannot guarantee removal of water vapor until it has been condensed by cooling. That's why Adams makes both.

* PORO-STONE *AIR FILTER*

1. Centrifugal separation of dirt and liquids.
2. Drainage to trap directed by vertical cast-in slots.
3. Continuous, fully automatic trap action.
4. Rapid diffusion and filtration through permanent, cleanable Poro-Stone.
5. Clean, dry air at practically unchanged pressure. Standard, stocked sizes handle from 10 to 700 cfm.

Easily installed in either vertical or horizontal pipe line.

* AFTERCOOLER AND CYCLONE SEPARATOR

Cools air to within a few degrees of cooling water, making certain that compressed air is colder than surrounding atmosphere, so that no further condensation can take place.

Counter flow, air-through-tube design assures continuously high heat transfer rate.

Double cyclonic action deposits all water and entrained oil in moisture chamber.

R. P. ADAMS CO., INC.
209 E. Park Drive, Buffalo 17, New York

Please send me your latest literature, Bulletin No. 176 on BOTH the Poro-Stone air filter and the Adams Aftercooler — Cyclone Separator.

Name.....

Company..... *Title*.....

Address.....

City..... *State*.....

FOR YOUR PROFIT'S SAKE — FIND OUT ABOUT BOTH

R. P. ADAMS CO., INC., BUFFALO 17, N. Y.

Less wear, less care, more air

with help of TIMKEN® bearings

THESE Ingersoll-Rand compressors at the Nicholson File Company stay on the job with minimum time-out for repairs. One reason why: Ingersoll-Rand mounts the crankshafts on Timken® tapered roller bearings.

Because of tapered construction, Timken bearings take radial and thrust loads in any combination. Crankshaft is held in rigid, positive alignment, reducing wear on moving parts. Compressor stays in top operating condition.

Timken bearings operate freely, frictionlessly because of their true rolling motion and the smooth surface finish of rollers and races. As a result, wear within the bearings themselves is minimized.

Since Timken bearings keep housing and shaft concentric, they make closures more effective. Lubricant stays in—dirt and moisture stay out.

No other bearing gives you all the advantages you get with Timken bearings. Be certain they are in the equipment you buy or build. Look for the trade-mark "Timken" on every bearing. The Timken Roller Bearing Company, Canton 6, Ohio. Canadian plant: St. Thomas, Ont. Cable address: "TIMROSCO".

This symbol on a product means its bearings are the best.

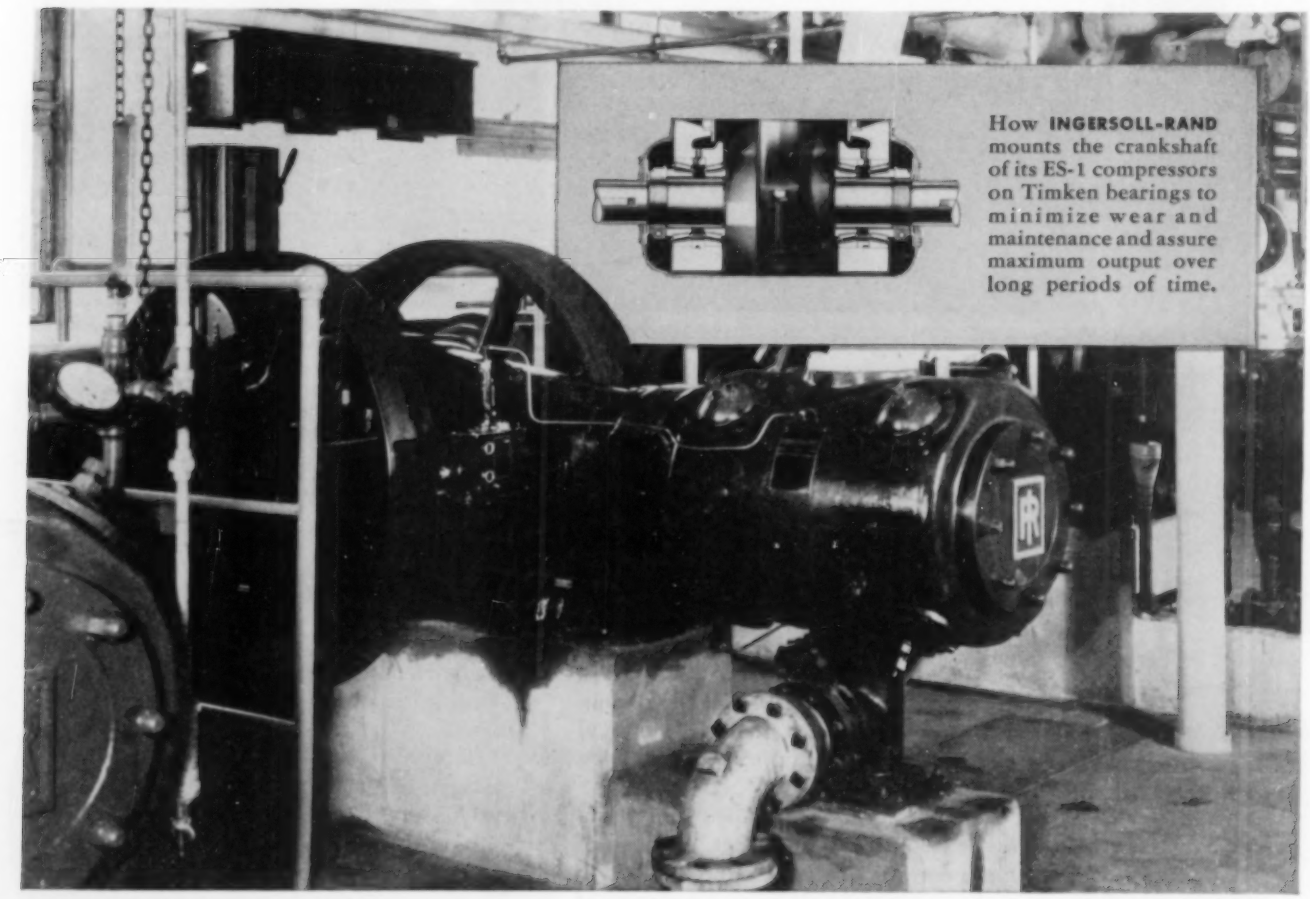

How **INGERSOLL-RAND** mounts the crankshaft of its ES-1 compressors on Timken bearings to minimize wear and maintenance and assure maximum output over long periods of time.

WE MAKE OUR OWN STEEL

The special grade alloy steel which gives Timken bearings their strength and resistance to wear is made in our own steel mills.

The Timken Roller Bearing Company is the acknowledged leader in: 1. advanced design; 2. precision manufacturing; 3. rigid quality control; 4. special analysis steels.

TIMKEN

TRADE-MARK REG. U. S. PAT. OFF.

TAPERED ROLLER BEARINGS

NOT JUST A BALL NOT JUST A ROLLER THE TIMKEN TAPERED ROLLER BEARING TAKES RADIAL AND THRUST LOADS OR ANY COMBINATION

Indianapolis Power & Light Installing

FIVE I-R RECTANGULAR CONDENSERS

at fast-growing White River Station

1949

1950

1951



1952



1953

OTHER I-R EQUIPMENT
in the Station
Boiler-feed pumps
Condensate pumps
Circulating-water pumps
plus many smaller pumps

When the fifth turbo-generator goes on line, as scheduled for December 1953, the Indianapolis Power & Light Company's White River Station will have increased its capacity from 90,000 kw to 271,000 kw in less than four years. *All five* turbines in this station will be served by *complete Ingersoll-Rand condensing plants*—Rectangular Condensers, steam-jet ejectors, condensate pumps and circulating-water pumps. Gibbs & Hill, Inc. are the consulting engineers on this fast-growing White River Station.

The first two I-R Rectangular Condensers, each containing 30,000 sq ft of condensing surface, were installed in 1949 and 1950 to serve two 45,000 kw turbo-generators. The third condenser, now being installed, is identical and will serve a duplicate 45,000 kw turbine.

It was originally planned to add another 45,000 kw unit. But, because of the increased power demand, the fourth turbo-generator will have a capacity of 68,000 kw . . . due on line in 1952. It will be served by a 40,000 sq ft I-R Rectangular Condenser with complete I-R auxiliaries.

Unit No. 5, to be installed in 1953, will be another 68,000 kw machine, with a duplicate I-R 40,000 sq ft condensing unit. In addition, Ingersoll-Rand boiler-feed pumps and a host of smaller I-R pumps will be serving right along with all the condensing equipment.

Ingersoll-Rand Rectangular Condensers, like these five, save space and installation costs, because the rectangular shell is designed to *fit* the rectangular space available under the turbine. They are completely factory assembled and shipped *in one piece* or *in flanged sections* that can be bolted together without field fitting or strength welding.

Your nearest I-R representative will gladly discuss this and other new developments in the power field with you.

Ingersoll-Rand

11 BROADWAY, NEW YORK 4, N. Y. 728-4

COMPRESSORS · AIR TOOLS · ROCK DRILLS · TURBO-BLOWERS · CONDENSERS · CENTRIFUGAL PUMPS · DIESEL AND GAS ENGINES

AMERICA'S MOST COMPACT

MULTI-PURPOSE—REGULATOR
—FILTER
—LUBRICATOR

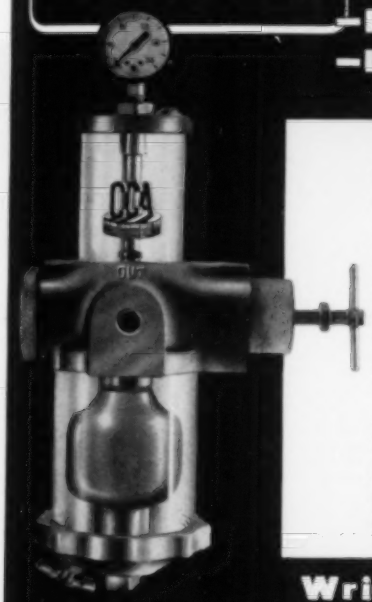

A design and engineering triumph... regulates pressure, filters, disperses precisely the correct amount of atomized oil, indicates operating pressure, controls surges within 2 lbs. and serves as a shut off valve. Made in pipe sizes from ¼" to ¾", RFL can be installed in an airline with two simple pipe connections. Most models shipped from stock.

Write for catalog

CCA Products Division

BRECO MANUFACTURING COMPANY

309 East Saratoga St., Baltimore 2, Maryland

Dealer franchises available in certain territories. Write or wire Sales Manager.

SAUERMAN

Power Drag Scrapers

Photo shows Sauerman Scraper stocking out coal at large power plant. Building a high, compact pile 350 ft. in radius, this scraper stores and reclaims at rate of 250 t. p. h.

Whatever your material—ore, coal, boulders, sand, gravel, clay—you can move it fast and efficiently with a long range Sauerman machine of either cableway or scraper type—at a great saving in cost. Any mechanic can operate it. Upkeep is simple. Machine is flexible: range is easily extended. Sturdy design and construction for long service. Bucket sizes run from ⅓ to 15 cu. yd.; spans range up to 1,000 ft.

WRITE TODAY FOR LATEST CATALOG

SAUERMAN BROS., INC. 548 S. CLINTON ST. CHICAGO 7, ILL.

Small Sauerman Scraper Handles 30,000-Ton Stockpile, Storing and Reclaiming 400 tons a day.

DRI AIR MAY BE INSTALLED BY SUSPENDING IT FROM THE PIPING WITHOUT ANY OTHER SUPPORT.

INCREASED PNEUMATIC EFFICIENCY WITH THIS AUTOMATIC SEPARATOR

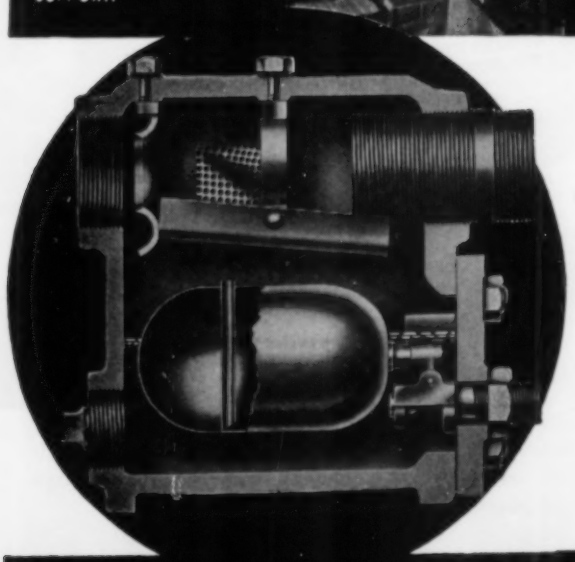

PROTECT EQUIPMENT WITH

DRIAIR

SEPARATES • COLLECTS • DELIVERS

• DriAir separates and automatically ejects the condensed water and oil from compressed air lines, collects pipe scale and rust, delivers clean dry air to tools and other pneumatic equipment. This promotes better lubrication, reduces wear, increases life of tools and produces greater output. All internal parts are made of bronze or copper—resistant to corrosion and practically permanent.

A TYPICAL INSTALLATION SHOWING DRI AIR STANDING ON A CONCRETE FLOOR NEXT TO THE WALL.

WRITE FOR BULLETIN DA WHICH FULLY DESCRIBES THE CONSTRUCTION AND OPERATION OF THE DRIAIR

NEW JERSEY METER CO.

"SPECIALISTS IN COMPRESSED AIR DEVICES"

PLAINFIELD, NEW JERSEY

INDUSTRY DOES THE

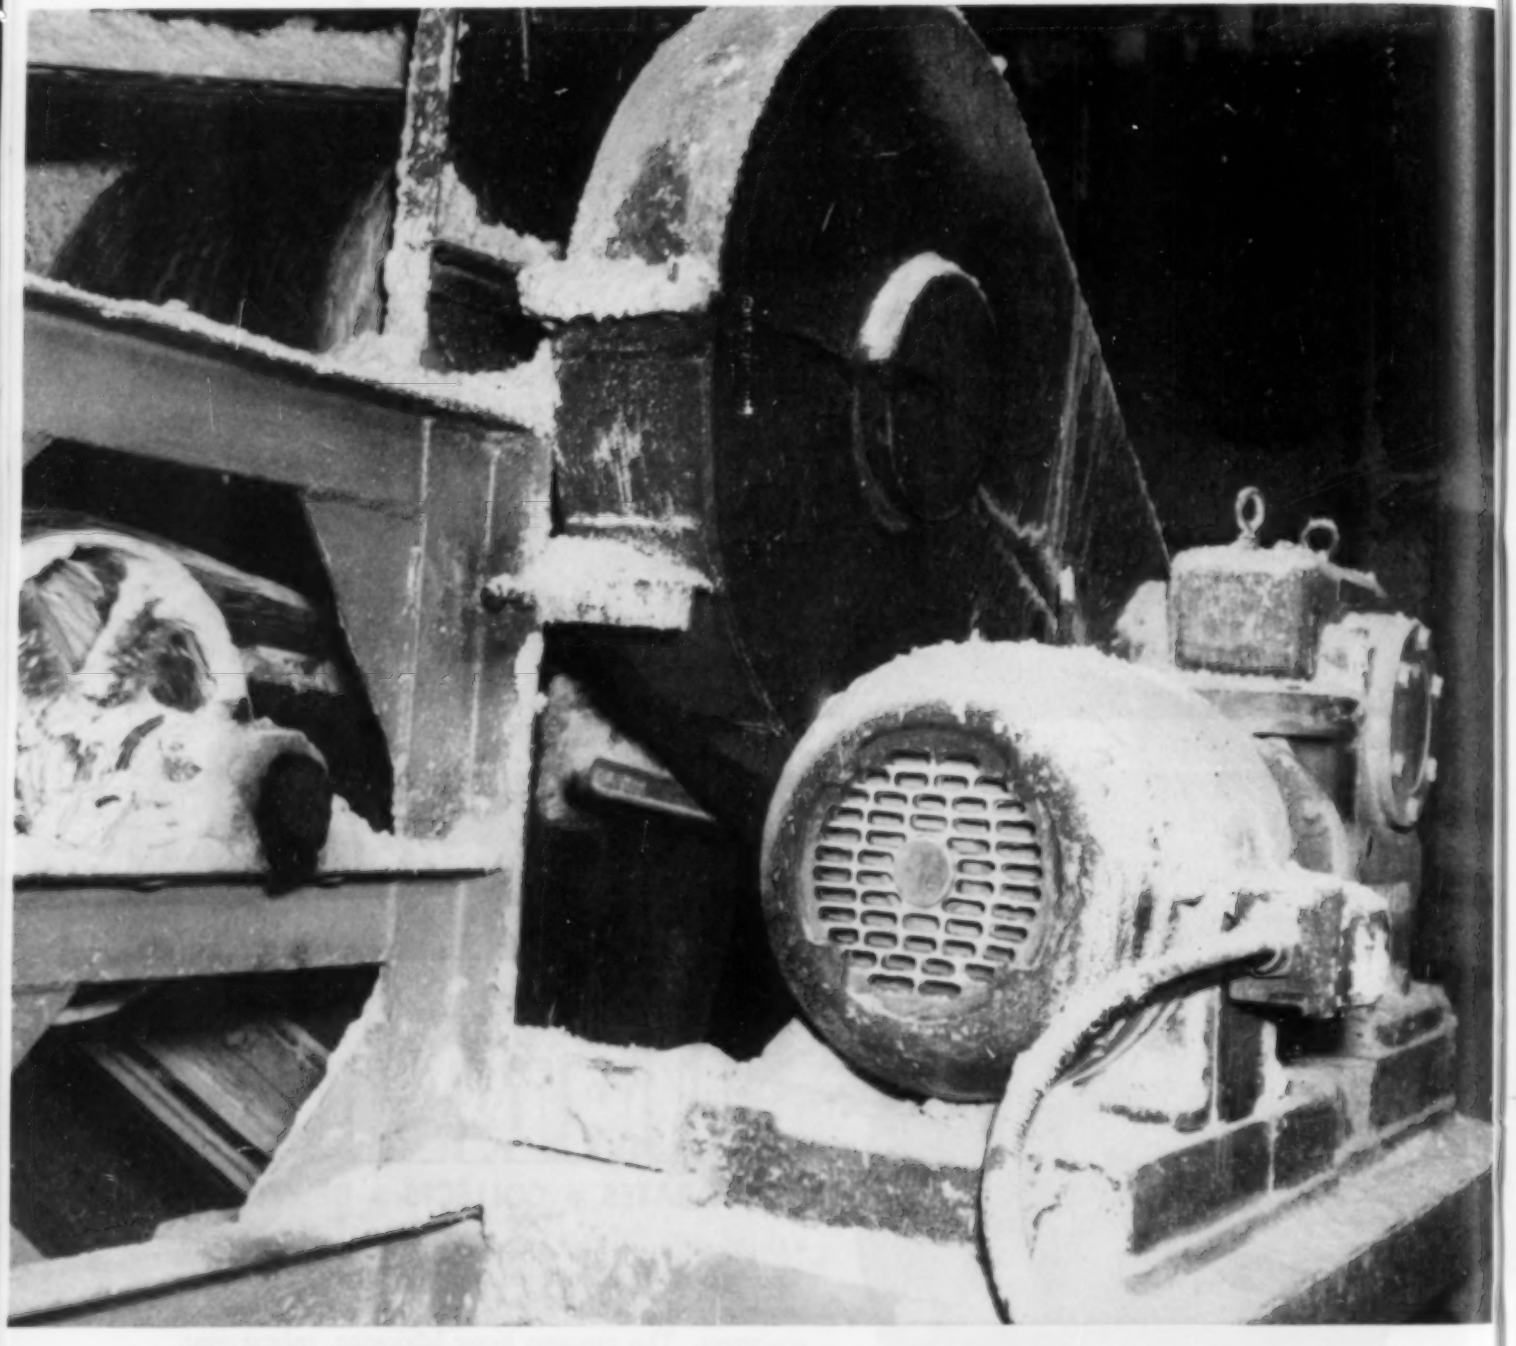

THE CHEMICAL INDUSTRY depends on standard, "off the shelf," Tri-Clad motors in the most adverse operating conditions, including corrosive, abrasive and explosive atmospheres. The 7½-hp totally-enclosed fan-cooled Tri-Clad motor above drives a crude ash conveyor an average of over 23 hours every day.

GENERAL ELECTRIC

752-1

TOUGH JOBS WITH TRI-CLAD MOTORS

REG. U.S. PAT. OFF.

EXTRA PROTECTION

Every Tri-Clad motor, open or totally-enclosed, is triply-protected against *physical damage, electrical breakdown* and *operating wear and tear.*

That's why you'll find general-purpose Tri-Clad motors in every industry—not only on the usual jobs which they do so economically—but on the *tough* jobs where unfailing performance is a must.

PROMPT DELIVERY

Today especially, delivery and service are important. G-E shipping points all over the country are ready to deliver most standard ratings right out of stock. And with the most complete service shop network in the motor industry you are assured of the best attention to motor problems.

TIMELY INFORMATION AVAILABLE

If you are concerned with training manpower, the new G-E Motor Selection and Application Course, including nine strip films, is a unique and valuable aid. A sample copy of the "Instructor's Manual" (GEZ-310), which outlines the course, may be obtained on request.

Also available is a free bulletin on "How to Maintain Motors and Generators" (GET-1202). Contact your local G-E sales office for any of the above material, or write *Section 752-12, General Electric Co., Schenectady 5, N. Y.*

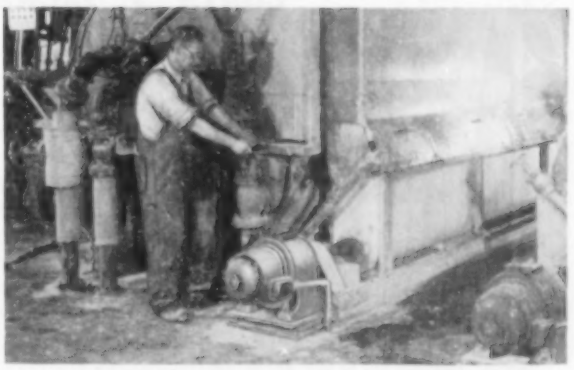

FOOD PLANTS on "continuous process" operation depend on Tri-Clad motors to avoid costly shut-downs. Totally-enclosed, non-ventilated Tri-Clad gear-motor above drives a repulper in a sugar refinery.

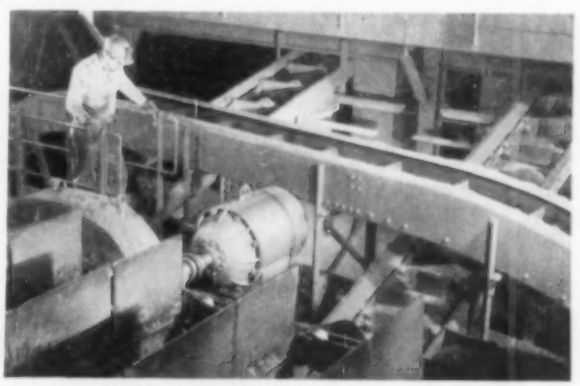

MINING INDUSTRIES know Tri-Clad motors can take abuse, don't twist out of line and are corrosion-resistant. This totally-enclosed, fan-cooled, Tri-Clad motor runs a coal conveyor.

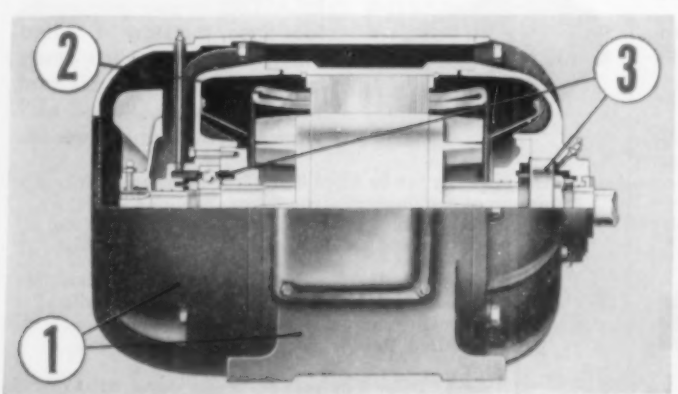

UNINTERRUPTED SERVICE under tough conditions is assured by many outstanding features of Tri-Clad totally-enclosed motors, for example: **1** rigid, cast-iron end shields and frame; **2** Formex* windings which resist oil, heat, shock, moisture, abrasion; **3** *completely* enclosed bearings that will last longer because provision is made for relubrication if necessary.

* Reg. trademark of General Electric Co.

METAL WORKING FIELD likes Tri-Clad motors because they're easy to mount in any position, rigid and smooth running, and *can be relubricated if operating conditions warrant — without disassembly!* Six 7½-hp TEFC Tri-Clad motors run machine above which polishes 500 to 1000 metal coffee-makers per hour!

You Can't Beat GOODALL *for Quality, Comfort, Economy ...in* BOOTS *and* CLOTHING

COATS • JACKETS OVERALLS

A wide selection of styles, in rubber, oiled and latex-coated . . . for reliable wet-work and wet-weather protection, above ground or below. Every garment made to specifications that assure long, economical wear, with maximum comfort. Reinforced where extra strength is required, without impairing complete freedom of movement. All sizes.

"SSS TOE-SAVER" (R) BOOTS

First-quality black rubber boots with features that provide the ultimate in durability, comfort and safety.

The famous "Toe-Saver" Safety Toe Cap withstands 2,000 lbs. pressure per square inch . . . a wide margin of protection on every job. Made with white bumper tip for positive identification. Short, three-quarter and full hip lengths. Slip-resistant Grid Tread soles.

"WEAR KING" (R) BOOTS. Same as above but without the "Toe-Saver" feature.

GLASS "HARD-BOILED" SAFETY HATS

Easiest to wear, yet providing greatest head protection. Exceed highest established requirements for strength, heat, fire, and moisture resistance, and dielectric tests.

★ ★ ★

You can count on **three-way value** when GOODALL is your **buyword** for boots and clothing. QUALITY is plainly evident in every detail. COMFORT makes them easy to wear under all working conditions. DURABILITY assures real economy—a lot of **extra wear** between replacements, regardless of rough use.

Contact Our Nearest Branch for Details

GOODALL RUBBER COMPANY

GENERAL OFFICES, MILLS and EXPORT DIVISION, TRENTON, N. J.

Branches: Philadelphia · New York · Boston · Pittsburgh · Chicago · Detroit · St. Paul · Los Angeles
San Francisco · Seattle · Portland · Salt Lake City · Denver · Houston · Distributors in Other Principal Cities

Est. 1870

NO MOISTURE OR DIRT GETS BY HERE



Johnson Self-Draining Compressed Air Separator.....

Like all Johnson Separators the new Type "SA" Self-Draining Separator combines the two most effective principles of removing moisture and dirt from compressed air:

1. Controlled expansion of air in separator precipitates most of the moisture.

2. A "thousand baffles" of coarse mesh repeatedly changes flow of direction to capture remaining foreign matter.

Johnson Separation Devices include Separators for Compressed Air or Steam, After coolers, oil absorbers.

Self-Draining—a simple but complete trap mechanism built right in, automatically drains separator whenever necessary.

WRITE FOR CATALOG

The Johnson Corporation

830 WOOD STREET THREE RIVERS, MICH.

Prolong Tool Life...

CUT REPAIR COSTS WITH "OILED AIR"* FROM Arnold Lubricators

With patented ARNOLD LUBRICATORS in your pneumatic tool lines, the flow of "oiled air" to working parts starts automatically when air tool starts, gives you "oiled air" where needed, when needed.

Oil reservoir can be filled under line pressure; pressure-proof window tells you when. Patented adjustable feeder enables you to adjust "oiled air" flow to job needs.

Made of strong, light-weight alloy so they do not drag on line; shaped to prevent catching. No needle valve or moving parts to get out of order. Four sizes. Easily installed. Pay for themselves in repair savings.

→ **Order from your equipment dealer TODAY or write us for leaflet and prices.**

*Copyright 1945

THE RUCKER COMPANY

4228 HOLLIS STREET • OAKLAND 8, CALIFORNIA



SAUERMAN DUROLITE WIRE ROPE BLOCKS

run smoother . . . last longer

The purchasing agent of a large mining company using hundreds of wire rope blocks in underground operations, bought his first Durolite Block only a few years ago. Today he is one of our best customers. He says that the introduction of Durolites has reduced considerably their yearly expenses for blocks, sheaves and wire rope, because Durolites last longer and are easier on wire rope.

Similar results are reported by hundreds of other mine, pit and quarry operators and construction superintendents who now use Durolite Blocks exclusively. All of these buyers had used one or more different makes of blocks before trying Durolites. After switching to Durolites they found that they saved money in the long run and the light, easy-to-handle Durolites made friends among their workers. WRITE FOR CATALOG.

The sheaves and frames of Sauerman Durolite Blocks are of skeleton design and made from tough, high strength alloy steel, providing extreme lightness with great durability. Furnished either with roller bearings or bronze bearings ingeniously designed to take up end thrust and prevent sheave from contacting the frame. A bead cast on inside of frame protects edge of sheave flange. For underground work, Durolites are made with a wide throat that permits running of knotted ropes.

SAUERMAN BROS., INC.

548 S. CLINTON St., CHICAGO 7

Manufacturers of famous Crescent Scraper

For 25 Years...

Manufacturer of Quality Products for Pneumatic Equipment

- **LUBRICATORS**
- **FILTERS**
- **REGULATORS**
- **HOSE ASSEMBLIES**
- **VALVES**

Write for data on the cost-saving features of the new combination Filter and Automatic Drain.

The Pioneer of Oil-fog Lubrication

C. A. Norgren CO.

IN COLORFUL COLORADO

3407 South Elati Street, Englewood
(Suburb of Denver)



SQUARE D

FOR A

Complete Line

OF H.P. RATED

AIR COMPRESSOR SWITCHES

1. Heavy Duty
2. Intermediate Duty
3. Gas Engine Cut-Out
4. Magnetic Unloader

full range of electrical and pressure ratings

Write for Bulletin 550, Square D Company, 4041 North Richards St., Milwaukee 12, Wis.

ASK YOUR ELECTRICAL DISTRIBUTOR FOR SQUARE D PRODUCTS

SQUARE D COMPANY

DETROIT · MILWAUKEE · LOS ANGELES

BUY ALL THREE FOR ONLY $6.00

or

Price Individual Books	Per Copy
Compressed Air Data	$3.00
Cameron Hydraulic Data	3.00
Cameron Pump Operators' Data	2.00

Any Combination at Proportionate Savings

COMPRESSED AIR MAGAZINE, 942 Morris Street, Phillipsburg, New Jersey.
Please send me:

- ☐ Compressed Air Data, Cameron Hydraulic Data and Cameron Pump Operators' Data..... All three for $6.00
- ☐ Compressed Air Data and Cameron Hydraulic Data..Both books for $5.00
- ☐ Cameron Hydraulic Data and Cameron Pump Operators' Data Both books for $4.50.
- ☐ Compressed Air Data and Cameron Pump Operators' Data Both books for $4.50.
- ☐ Enclosed is (money order) (check) for $.....) ☐ Send books C.O.D. I understand that the books will be sent me postpaid, and that they may be returned within 10 days if not satisfactory.

Name .....
Company .....
Street No. .....
City ..... State ..... County .....

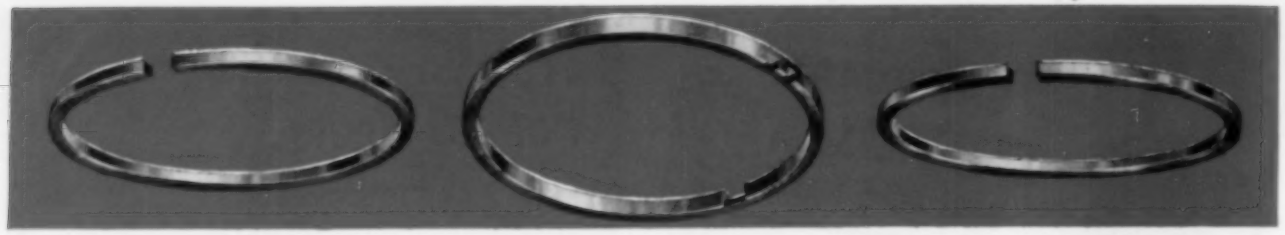

Koppers K-Spun Rings

Manufactured in diameters up to 12½" by Koppers exclusive centrifugal casting process. 100% stronger, 4 times more resistant to combustion shock than ordinary rings. Will not break in installation or for the life of the engine. For high-speed diesels and other applications where extreme strength is needed.

Koppers Lug Seal Rings

A specially designed two-piece ring for use on badly out-of-round and tapered cylinders, or on pistons with worn grooves. Maintains compression at a high level, prevents blow-by, provides highly efficient oil control.

Koppers Porous Chrome* Rings

Porous Chrome surface holds and distributes oil during break-in, quickly wears to perfect seating. Combined with K-Spun metal in sizes up to 12½" dia. Last up to 4 times as long as other rings, cut cylinder wear up to 50%. Designed for top compression rings of high-speed engines.

** Van der Horst Process*

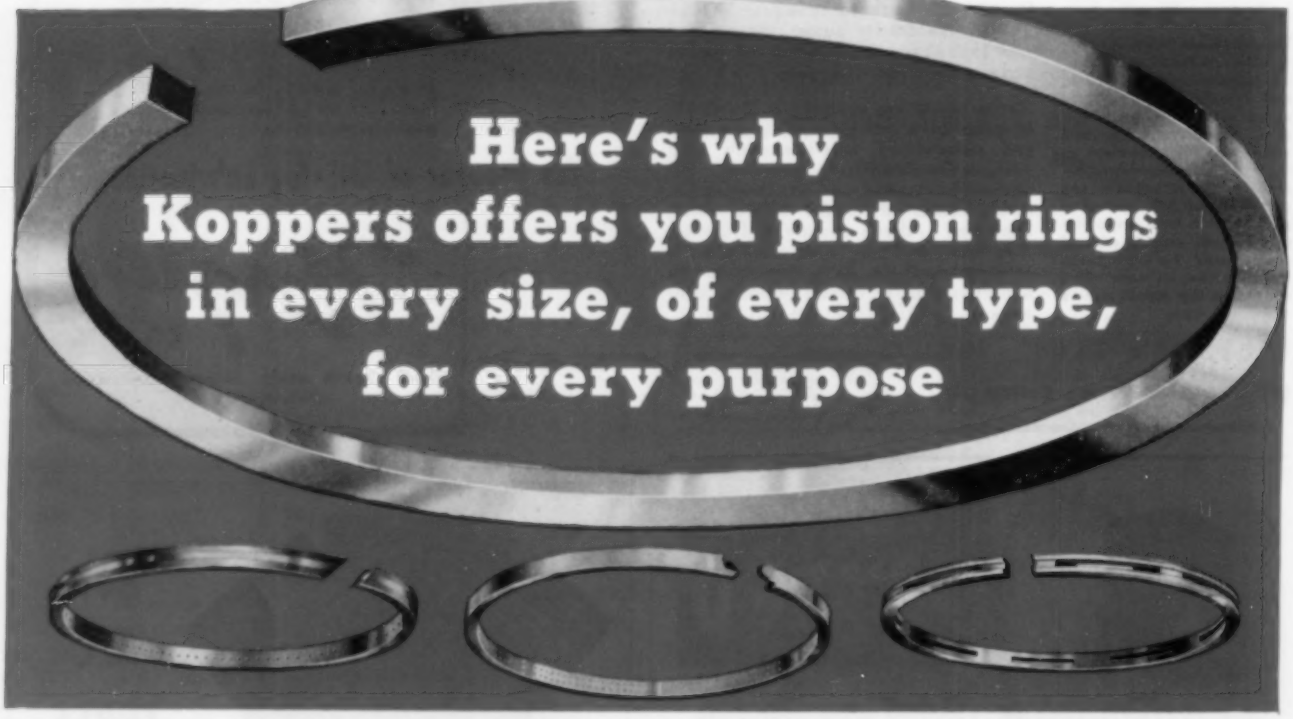

Koppers Seal Rings

Specially designed ring with a projecting bronze band that causes a burnishing action on cylinder walls. Decreases scuffing and wear on cylinder walls of gas and diesel engines, air and refrigeration compressors and many other applications.

Koppers Step-Seal Rings

Designed especially for applications where blow-by is a serious problem. Combines the strength of a single-piece ring with the sealing qualities of a multiple-piece ring. For use on hydraulic presses and diesel and other internal combustion engines.

Koppers Oil-Cutter Rings

Exceptional oil control is attained by unique design . . . 2 bevels for riding over oil on upstroke, 2 scraping edges for taking excess oil from cylinder walls on downstroke, plus a series of wide drainage slots. For use on high-speed, 4-cycle engines.

These are a few of the hundreds of rings manufactured by Koppers.

EVERY piece of equipment presents a different piston ring problem. Koppers, with its wide variety of rings for every conceivable use, provides the solution to *all* industrial and automotive ring problems.

Our engineers, who work with you in determining the best rings for your applications, have all the facilities of the large, modern Koppers piston ring plant at their disposal . . . to supply you with the rings that will cut down-time, increase efficiency and lengthen the life of your equipment.

No matter what kind of equipment you have . . . railroad, stationary or marine diesels, aircraft or automotive engines, pumps, compressors, steam hammers, hydraulic presses . . . if it uses piston rings or sealing rings, write, wire or phone us today for experienced help with your piston ring problems. Koppers Company, Inc., Piston Ring Dept., 1513 Hamburg St., Baltimore 3, Maryland.

KOPPERS®

KOPPERS *Only KOPPERS can furnish K-Spun or Porous Chrome!*

AMERICAN HAMMERED **PISTON RINGS**

Ingersoll-Rand Size 502

AIR IMPACTOOL

1952 MODEL

SAVES up to 90% of nut running time

Capacity ¼" bolt size

POWERFUL — The power of this 502 Impactool has been increased 20% over the old style tool. The Multi-Vane Air Motor operates at a free speed of 1600 rpm, and the famous I-R Impact Mechanism delivers 2150 rotary impacts per minute.

BALANCED — Proper location and angle of handle, together with light weight (3⅝ lbs) make the 502 a well balanced, easy to use tool.

SPEEDY — High speed runs down nuts quickly, and rapid-fire rotary impacts tighten them in a hurry. Full power in either direction–convenient reverse cap.

QUIET — Scientific muffling has been incorporated in this 502, in tune with today's demand for "less noise–more work." One hundred of these 502 Impactools make less noise than one old type tool. This feature alone means reduced operator fatigue, increased safety, and higher worker morale!

COMFORTABLE — Hand-molded handle and easy, convenient trigger eliminate fatigue and hand cramps.

STURDY — This 502 Impactool is equipped with an air strainer and efficient, sturdy gearing to assure longer tool life and to meet the pace set by today's assembly line.

Size 502B

Ideal for vertical suspension operation on assembly line production

With the exception of the convenient lever throttle, the 502B is identical in construction and operation to the 502.

Ingersoll-Rand offers a complete line of Air and Electric Impactools up to 4" bolt size capacity.

Ingersoll-Rand

11 BROADWAY, NEW YORK 4, N. Y. 721-8

COMPRESSORS • AIR TOOLS • ROCK DRILLS • TURBO BLOWERS • CONDENSERS • CENTRIFUGAL PUMPS • DIESEL AND GAS ENGINES

Under ANY conditions...with ANY compressor

MORE EFFICIENT PERFORMANCE...

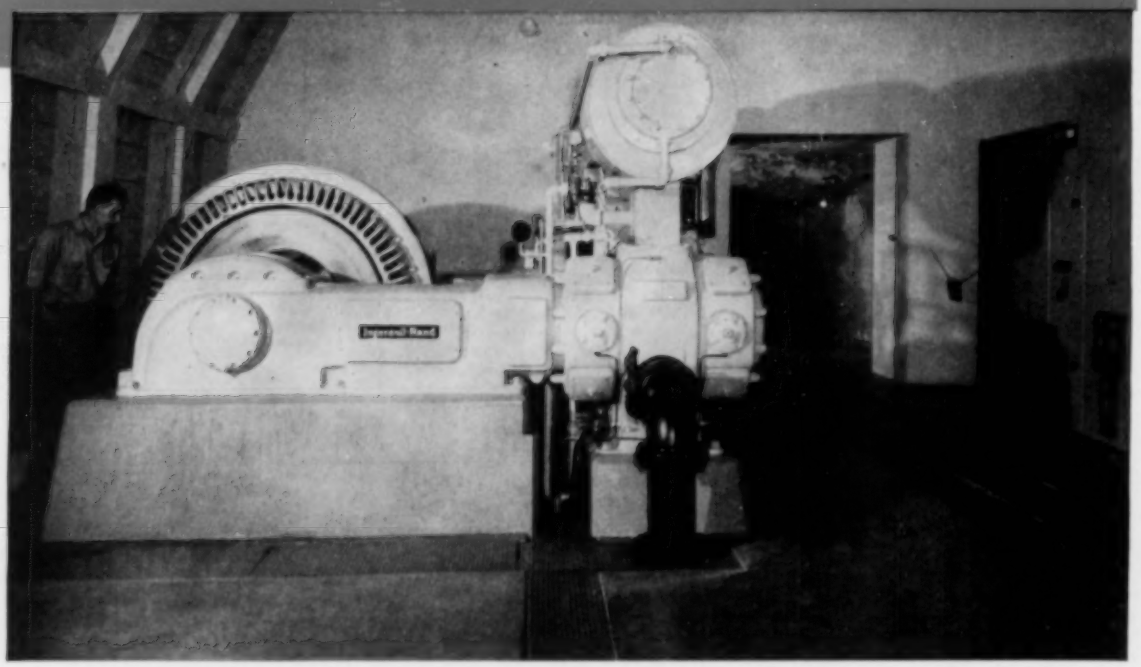

when you use the recommended Texaco air compressor oil

Whatever the size or type of your compressors or whatever the operating conditions, you can have a Texaco air compressor oil *exactly right* to step up performance and bring down your maintenance costs. Let a Texaco Lubrication Engineer survey your setup and recommend which to use. For example —

★★You can overcome rusting in compressors and systems by using a Texaco ***rust-inhibited*** air compressor oil.

★★You can eliminate the excessive wear caused by "wet cylinders" by using a Texaco *compounded* air compressor oil.

★★You can avoid the harmful carbon and gum that form under severe conditions by using a Texaco ***heavy-duty*** air compressor oil.

★★You can keep compressors clean and efficient in normal operation by using a Texaco *straight mineral* air compressor oil.

FOR YOUR ROCK DRILLS use *Texaco Rock Drill Lubricant EP*. This "extreme pressure" lubricant is your best protection against wear, your best guardian against rust whether drills are running or idle. Count on it for longer drill life and lower maintenance costs.

A Texaco Lubrication Engineer will gladly work with you to keep all your equipment in condition to produce more at lower cost. Just call the nearest of the more than 2,000 Texaco Distributing Plants in the 48 States, or write The Texas Company, 135 East 42nd Street, New York 17, N. Y.

TEXACO Air Compressor Oils

FOR ALL OPERATING CONDITIONS

Faithfully yours 50 *for Fifty Years*

TUNE IN . . . TEXACO STAR THEATER starring MILTON BERLE on television every Tuesday night. METROPOLITAN OPERA radio broadcasts every Saturday afternoon.